


NEW MEXICO OIL CONSERVATION COMMISSION

600 SANTA FE, NEW MEXICO

WELL RECORD

MAIL TO DISTRICT OFFICE, OIL CONSERVATION COMMISSION, TO WHICH FORM C-101 WAS SENT NOT LATER THAN TWENTY DAYS AFTER COMPLETION OF WELL. FOLLOW INSTRUCTIONS IN RULES AND REGULATIONS OF THE COMMISSION. SUBMIT IN QUINTUPPLICATE.

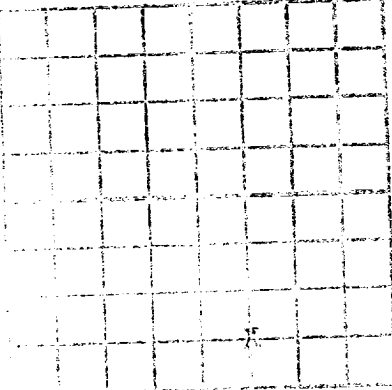

Oil & Refining Company
South Four Lakes Unit I
Four Lakes Devonian
PCOL
Lea
COUNTY
1980
East
LINE AND 660
FEET FROM
25
IF STATE LAND THE OIL AND GAS LEASE NO. IS 135496
10-20-56
19
DRILLING WAS COMPLETED 2-15-57
Sharp Drilling Company
Box 1271, Midland, Texas
156 DF
THE INFORMATION GIVEN IS TO BE
Not confidential

OIL SANDS OR ZONES

12857 TO 12892 NO. 4, FROM TO
NO. 5, FROM TO
NO. 6, FROM TO

IMPORTANT WATER SANDS

NO. 1, FROM TO FEET
NO. 2, FROM TO FEET
NO. 3, FROM TO FEET
NO. 4, FROM TO FEET

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
11-3/8	48	New	379.47	Halliburton	-	-	Surface
9-5/8	35	New	4205.00	Baker	-	-	Intermediate
7	26.29	New	12880.80	Halliburton	-	-	Oil

MUDDING AND CEMENTING RECORD

TIME OF RIG	SIZE OF CASING	WHERE SET	NO. BAGS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12-1/2	11-3/8	39%	732	Halliburton	-	-
12-1/4	9-5/8	4218	2500	Halliburton	-	-
8-3/4	7	12893	2000	Halliburton	-	-

RECORD OF PRODUCTION AND STIMULATION

RECORD THE PRACTICES USED, NO. OF QTS. OR GALS. USED, INTERVAL TREATED OR SHOT.

Perforated 7" casing from 12857 to 12892 with 1/4 shots per foot. Acidized with 3000 gallons regular low tension acid.

On 15-1/2 hour flowing test well made 271 barrels of oil. gas at the rate of 1505 Mcf/day.

DEPTH CLEARED OUT