

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

COPY TO O. C. C.
SUBMIT IN TRIPLICATE*
(Other Instructions on reverse side)

Form approved.
Budget Bureau No. 42 R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM 15903 A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

--

7. UNIT AGREEMENT NAME

--

8. FARM OR LEASE NAME

Flying M-McKay Federal

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Undesignated Devonian

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 26, T9S, R32E

12. COUNTY OR PARISH

Lea

13. STATE

NM

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐
2. NAME OF OPERATOR
PETROLEUM DEVELOPMENT CORPORATION
3. ADDRESS OF OPERATOR
9720 B Candelaria, NE, Albuquerque, NM 87112
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface
1980' from the East Line, 1980' from the South Line; Sec. 26,
T9S, R32E
14. PERMIT NO.
15. ELEVATIONS (Show whether DF, RT, GR, etc.)
4320 GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

(Other) ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

ABANDON* ☐

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) Intermediate Casing ☐

REPAIRING WELL ☐

ALTERING CASING ☐

ABANDONMENT* ☐

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

12-30-78

Ran 81 jts. of 8-5/8" 24# STC casing, set @ 3640'

First Stage

Cemented with 100 sx. Class "C", 3% A-2 & 6#/sk. salt, 1/4#/sk. cello flake, 200 sx.
Class "C", 2% CaCl, DV tool @ 1890'.

Second Stage

Cemented with 215 sx. Class "C", 3% A-2, 6#/sk. salt, 1/4#/sk. cello flake.

Bumped plug @ 10:45 pm, did not circulate, top cement 100'. Test casing to 2000 psi
for 30 minutes.

18. I hereby certify that the foregoing is true and correct

SIGNED

Paula D. Bartocci

TITLE

Secretary

DATE


1-8-79

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

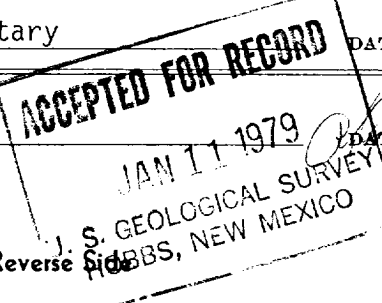

*See Instructions on Reverse Side

RECEIVED
JAN 11 1979
U. S. GEOLOGICAL SURVEY
HOBBS, NEW MEXICO