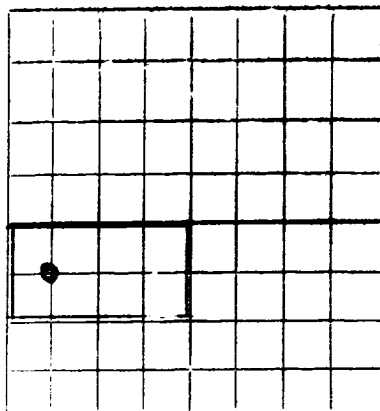


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

FEB 26 1964

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

SUNSET INTERNATIONAL PETROLEUM CORPORATION
(Company or Operator)O'NEILL STATE
(Lease)

Well No. 1, in NW 1/4 of SW 1/4, of Sec. 16, T. 8-S, R. 36-E, NMPM.
SOUTH PRAIRIE PENN Pool, XXXX ROOSEVELT County.

Well is 1980' feet from SOUTH line and 660' feet from WEST line
of Section 16. If State Land the Oil and Gas Lease No. is E-8875

Drilling Commenced 12-29-63, 1963 Drilling was Completed 2-3-64, 1964

Name of Drilling Contractor NOBLE DRILLING COMPANY

Address DRAVER 550 MIDLAND, TEXAS

Elevation above sea level at Top of Tubing Head 4100 The information given is to be kept confidential until
19

OIL SANDS OR ZONES

No. 1, from 9579' to 85' No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from UNKNOWN to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8"	48, H 40	NEW	417'	GUIDE			
8-5/8"	24, & 32	NEW	4179.97'	FLOAT SHOE ON BOTTOM			
4-1/2"	10.6 & 11.6	NEW	9750	FLOAT		9579-85	OIL PROD.

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2"	13-3/8"	417'	360	PUMP & PLUG	14	
12-1/4"	8-5/8"	4180'	1480	PUMP & PLUG	14	
7-7/8"	4-1/2"	9750	375	PUMP & PLUG	14	

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

PERFED 9579-85 ACIDIZED WITH 500 GALLONS MUD ACID

Result of Production Stimulation POTENTIAL TEST 508 BOPD, FLOW PRESSURE 600 PSI

Depth Cleaned Out 9704'

RECORD OF DRILL-STEM AND SPECIAL " " TS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 750 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 2-20, 19 64
OIL WELL: The production during the first 24 hours was 476 barrels of liquid of which 99.6% was oil; 0% was gas; 0% was water; and 0% was sediment. A.P.I. Gravity 46
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy			T. Devonian		T. Ojo Alamo
T. Salt			T. Silurian		T. Kirtland-Fruitland
B. Salt			T. Montoya		T. Farmington
T. Yates			T. Simpson		T. Pictured Cliffs
T. 7 Rivers			T. McKee		T. Menefee
T. Queen			T. Ellenburger		T. Point Lookout
T. Grayburg			T. Gr. Wash		T. Mancos
T. San Andres	4017		T. Granite		T. Dakota
T. Glorieta	5470		T.		T. Morrison
T. Drinkard	5750		T.		T. Penn
T. Tubbs	5918		T.		T.
T. Abo	7750		T.		T.
T. Penn	8018		T.		T.
T. Miss			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
4017	5470	1453	SAN ANDRES				
470	5456	986	GLORIETTA				
5456	7750	1292	GLAUCOPH				
7750	8018	268	ABO				
8018	8518	500	BOLECA				
8518	8750	232	PENNA				
		75	T.				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Robert W. Arrendiell FEBRUARY 14, 1964
Company or Operator SUNSET INTERNATIONAL LTD. Address 1401 PETROLEUM LIFE BLDG. MIDLAND, TEXAS
Name ROBERT W. ARRENDIELL Position or Title PRODUCTION MANAGER, WEST TEXAS DIV.