

SUNDRY NOTICES AND REPORTS OF WELLS IN NEW MEXICO & 10

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL ☐ GAS WELL ☐ OTHER ☐ WIW		3. LEASE DESIGNATION AND SERIAL NO. NM- LC 062529-A	
2. NAME OF OPERATOR Plains Petroleum Operating Co.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME	
3. ADDRESS OF OPERATOR 415 West Wall Street, Suite 2110 Midland, Texas 79701		7. UNIT AGREEMENT NAME Sec. 25 Todd Lower San Andres Unit	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface Unit letter H, 1980' FNL & 660' FEL		8. FARM OR LEASE NAME	
14. PERMIT NO.		9. WELL NO. 8	
15. ELEVATIONS (Show whether SP, RT, GR, etc.)		10. FIELD AND POOL, OR WILDCAT Todd Lower San Andres Assoc	
		11. SEC. T, R, M., OR BLK. AND SURVEY OR AREA Sec. 25, T7S, R35E	
		12. COUNTY OR PARISH Roosevelt	13. STATE NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF ☐	PULL OR ALTER CASING ☐	WATER SHUT-OFF ☐	REPAIRING WELL ☐
FRACTURE TREAT ☐	MULTIPLE COMPLETE ☐	FRACTURE TREATMENT ☐	ALTERING CASING ☐
SHOOT OR ACIDIZE ☐	ABANDON ☐	SHOOTING OR ACIDIZING ☐	ABANDONMENT ☐
REPAIR WELL ☐	CHANGE PLANS ☐	(Other) <u>Convert to Injection</u> ☒	
(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)			

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

6-8-90 Pool Well Ser PU rods, were parted, POOH & LD 64 3/4" & 5 5/8" rods, PU tbg, tbg parted 8' below surf. WIH w/40' tbg, screwed into collar, POOH w/40' tbg & rec split tbg collar, WIH w/40' tbg & new TC, screwed into tbg pin end, stripped out of hole & LD 136 jts 2-3/8" tbg & 100 5/8" rods.

6-15-90 RU & RIH w/ 5-1/2" x 2-3/8" AD-1 pkr & 132 jts 2-3/8" plastic coated tbg, pkr set @ 4176.07' KB. Loaded csg/tbg annulus with pkr fluid

7-10-90 Hooked up wellhead injection assembly & started injection




18. I hereby certify that the foregoing is true and correct

SIGNED Bonnie Husband TITLE Engineering Tech DATE Aug 7, 1990

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____

CONDITIONS OF APPROVAL, IF ANY:

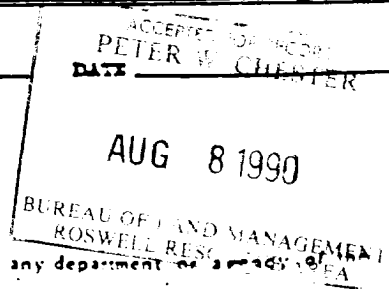

*See Instructions on Reverse Side