


CURRENT STATUS

11/24/81 SDS

BASS STATE NO. 2
ROOSEVELT COUNTY, NEW MEXICO

RKB 4233'
GL 4221'

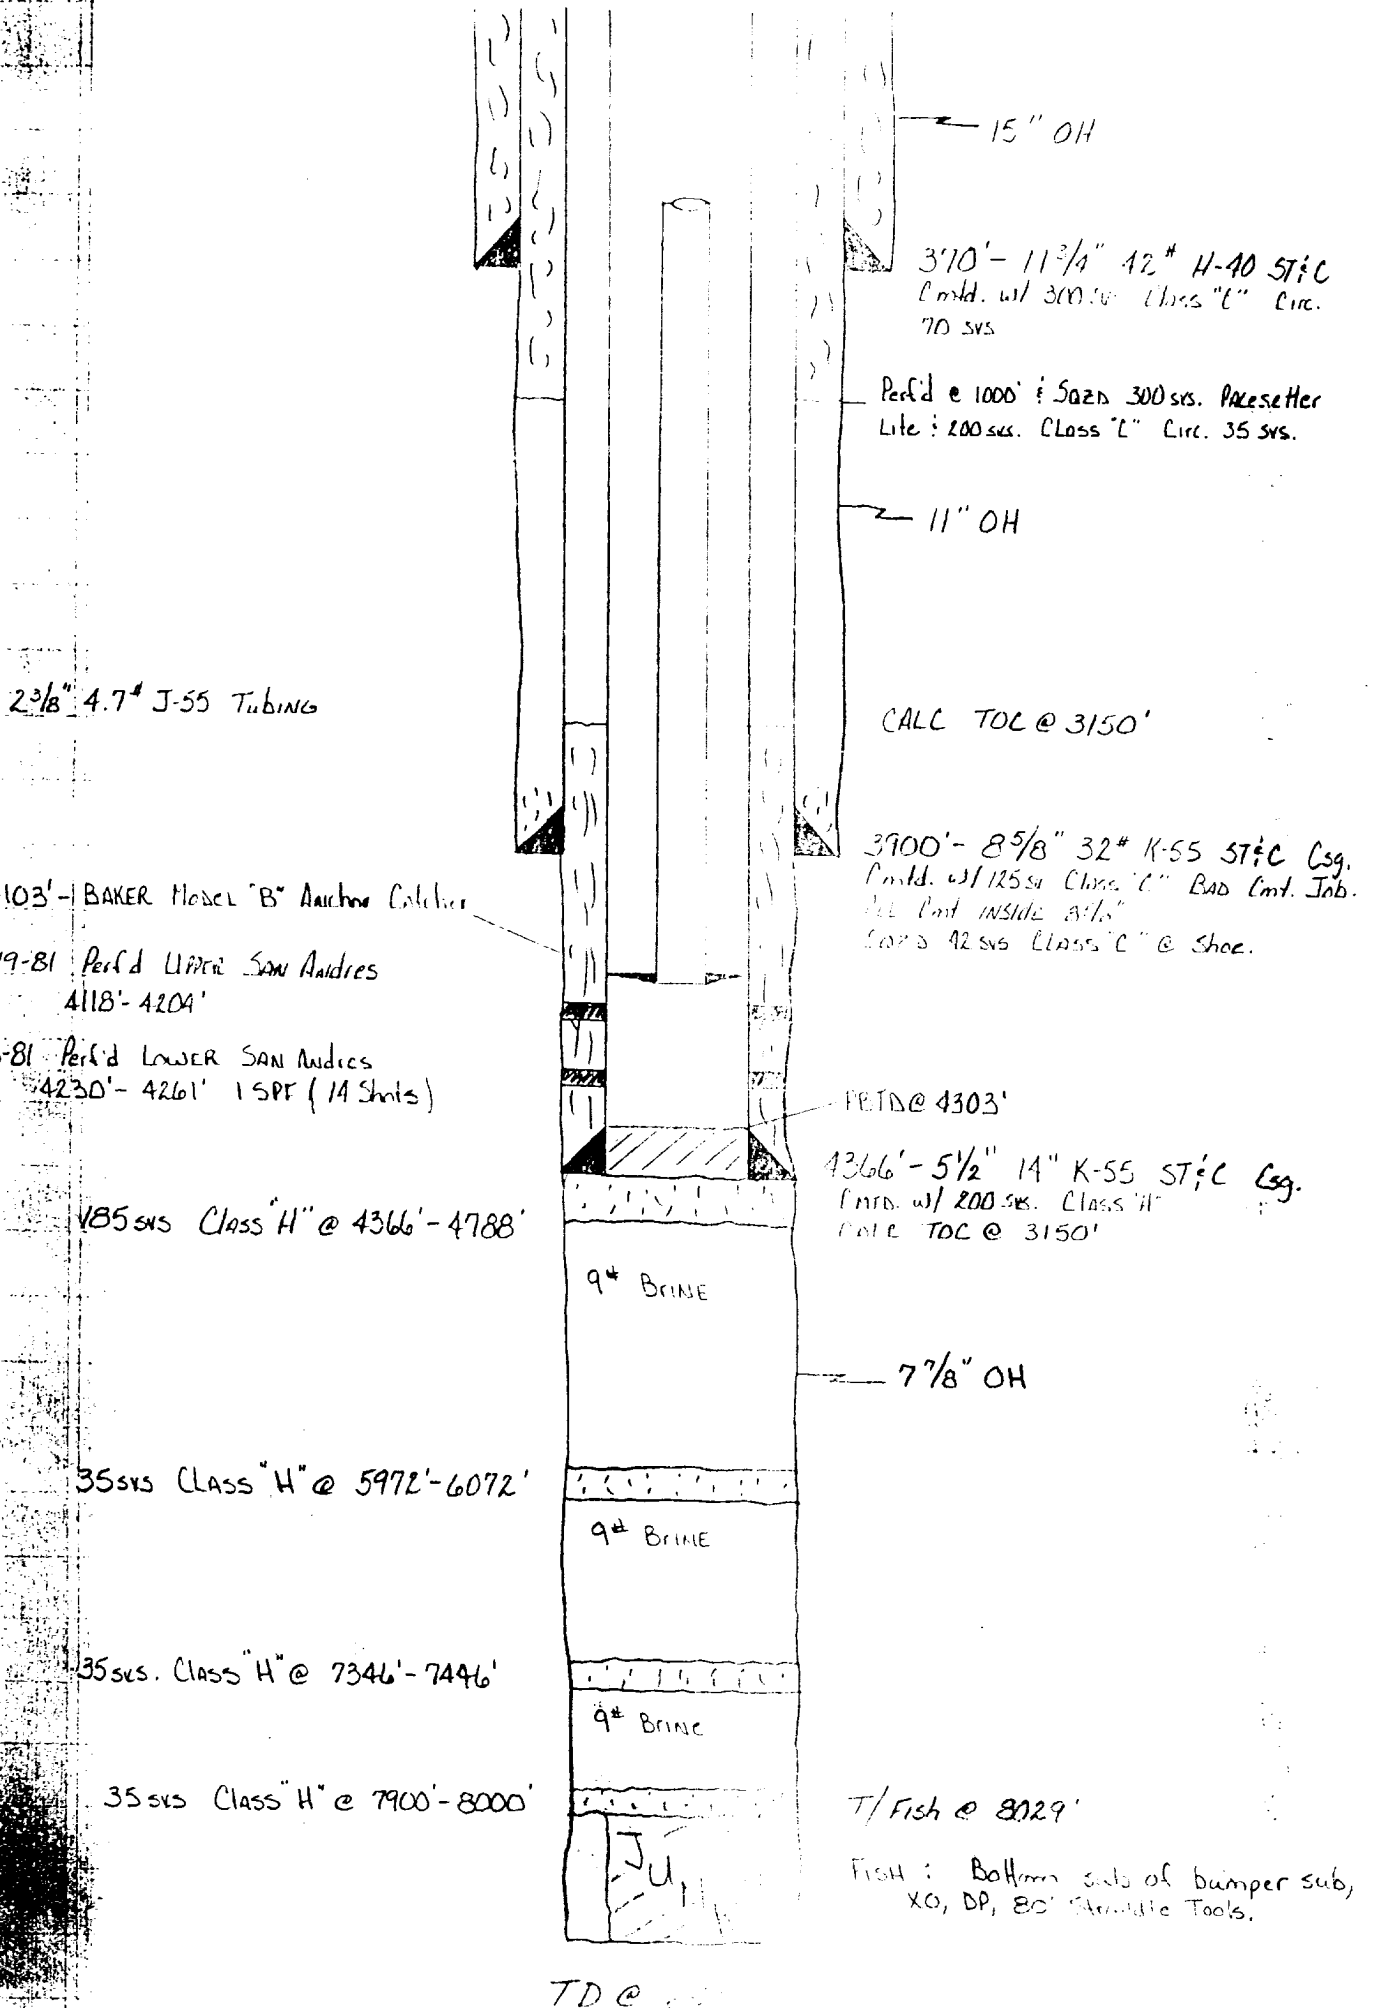

PROPOSED P: A

11/24/81 SDS

BASS STAIL No. 2
ROOSEVELT COUNTY, NEW MEXICO

RKB 4233'
GL 4221'

10 SWS CLASS "C" @ SURFACE

SPOT 35 SWS. CLASS "C" FROM 935'-1050'

Cut 5 1/2" Csg. @ 3100'±

SPOT 35 SWS. CLASS "C" FROM
3050'-3150'

PBTD @ 3763'

CLBP @ 4100' w/ 35 SW CLASS "C" ON TOP

9-19-81 Per'd UPPER SAN ANDRES
4118'-4204'

9-8-81 Per'd LOWER SAN ANDRES
4230'-4261' 1 SPF (14 SHOTS)

185 SWS CLASS "H" @ 4366'-4788'

35 SWS CLASS "H" @ 5972'-6072'

5 SWS. CLASS "H" @ 7346'-7446'

35 SWS CLASS "H" @ 7900'-8000'

15" OH

370'-11 3/4" 42# H-40 ST: C
Lmtd. w/ 300 SW. CLASS "C" Circ.
70 SWS

Per'd @ 1000' : SIZES 300 SW. PACES SETTER
LIFE : 200 SW. CLASS "C" Circ. 35 SWS.

11" OH

CALL TOC @ 3150'

3900'-8 5/8" 32# K-55 ST: C Csg.
Lmtd. w/ 125 SW CLASS "C" BAD Lmt. Jnb.
ALL Lmt. INSIDE 8 1/2"
SIZES 42 SWS CLASS "C" @ SHOE

PBTD @ 4303'

4366'-5 1/2" 14" K-55 ST: C Csg.
Lmtd. w/ 200 SW. CLASS "H"
CALL TOC @ 3150'

9# BRINE

7 7/8" OH

9# BRINE

9# BRINE

T/FISH @ 8029'

FISH : Bottom sub of bumper sub,
XO, DP, 80' Straddle Tools.

TD @ 8000'