


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

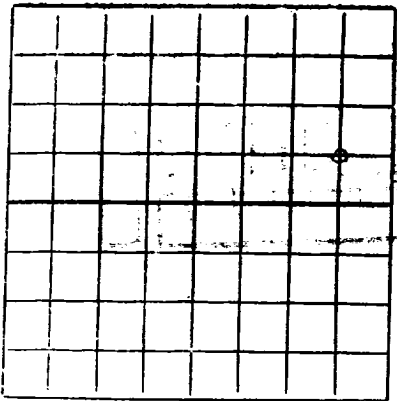

AREA 640 ACRES
LOCATE WELL CORRECTLY

Gulf Oil Corporation

(Company or Operator)

W. A. Tulk

(Lease)

Well No. 8, in S. 1/4 of NE 1/4, of Sec. 25, T. 13-S, R. 31-E, NMPM.

Japrock-Queen

Pool, Chaves

County.

Well is 1920 feet from North line and 660 feet from East line

of Section 25-13-S-31-E. If State Land the Oil and Gas Lease No. is

Drilling Commenced 1-4, 1956. Drilling was Completed 1-12, 1956.

Name of Drilling Contractor P. W. Miller Drilling and Production Company

Address Box 5613, Roswell, New Mexico

Elevation above sea level at Top of Tubing Head 4388'. The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3058 to 3076 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	21#	new	285'	Baker			Surface Pipe Production String
4-1/2"	9.50#	New	3048'	Larkin			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. BAGS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	297'	175	Pump & Plug		
7-7/8"	4-1/2"	3048'	75	Pump & Plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Treated open hole formation from 3058-3076' with 2400 gallons lease oil with 1/2 sand per gallon. Injection rate 9.5 bbls per minute.

Result of Production Stimulation Pumped 151 bbls oil, no water thru 2-3/8" tubing 2 1/2 hours.

Depth Cleaned Out

CORD OF DRILL-STEM AND SPECIAL T

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 3076 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing January 24, 1956, 1956

OIL WELL: The production during the first 24 hours was 151 barrels of liquid of which 100% was
was oil; 0% was emulsion; 0% water; and 0% was sediment. A.P.I.
Gravity 36.5

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.	T. Devonian	T. Ojo Alamo
T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt	T. Montoya	T. Farmington
T. Yates	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	T. McKee	T. Menefee
T. Queen 3052'	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres	T. Granite	T. Dakota
T. Glorieta	T.	T. Morrison
T. Drinkard	T.	T. Penn
T. Tubbs	T.	T.
T. Abo	T.	T.
T. Penn	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	FORMATION
0	12		Distance from Top Kelly				DEVIATION - TOTAL SURVEY
	295		Drive Bushing to Ground				1/4 - 1520'
	1580		Caliche and Red Bed				1/2 - 2250'
	2304		Red Bed				1/2 - 2530'
	2425		Anhydrite and Salt				1/2 - 2899'
	2653		Anhydrite				
	3034		Anhydrite and Gypsum				
	3076		Anhydrite				
			Anhydrite and Sand				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far
as can be determined from available records.

February 6, 1956
(Date)
Company or Operator Gulf Oil Corporation Address Box 2167, Hobbs, New Mexico
Name E. J. [Signature] Position or Title Area Supt. of Prod.