

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103C
Effective 1-1-65
AUG 25 8 01 AM '67

5a. Indicate Type of Lease State <input type="checkbox"/> Fee <input checked="" type="checkbox"/>
5. State Oil & Gas Lease No.
7. Unit Agreement Name
8. Farm or Lease Name CROSBY "E"
9. Well No. 2Y
10. Field and Pool, or Wildcat CATO SAN AND
12. County CHAVES

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER- DRILLING
2. Name of Operator PAN AMERICAN PETROLEUM CORPORATION
3. Address of Operator BOX 68, HOBBS, N. M. 88240
4. Location of Well UNIT LETTER L 1650 FEET FROM THE SOUTH LINE AND 660 FEET FROM THE WEST LINE, SECTION 10 TOWNSHIP 8-S RANGE 30-E NMPM.
15. Elevation (Show whether DF, RT, GR, etc.)

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>

SUBSEQUENT REPORT OF:

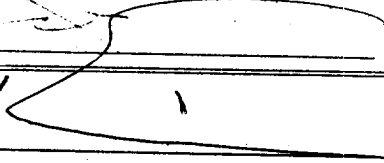
REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
COMMENCE DRILLING OPNS. <input checked="" type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
CASING TEST AND CEMENT JOB <input checked="" type="checkbox"/>	OTHER <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103

Chico Drilling Co. spudded 12 1/4" hole 3:15 PM 8-21-67. At 11:45 PM, 8 5/8" OD 24" J-55 casing was set @ 320' w/ 250 psi 2% each. Cement circulated. After 11 OC 30 hours, tested casing w/ 850 psi for 30 minutes. Test O.K. Reduced hole to 7 7/8" @ 320' and resumed drilling.

* EST VOL SLURRY- 450 CF
APPX TEMP " 85°
FORM. TEMP, Est 70°
EST. SIG. @ 75T 750 psi

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED 	TITLE AREA SUPERINTENDENT	DATE 8-25-67
APPROVED BY 1- SUSP	TITLE	DATE
CONDITIONS OF APPROVAL, IF ANY: 1- RRY		