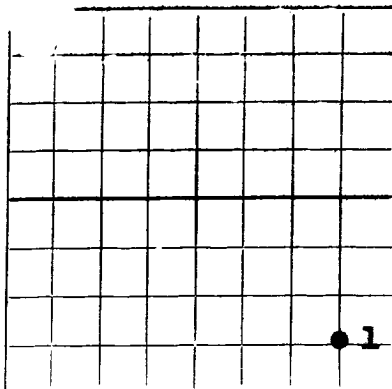


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

Amerada Petroleum Corporation
(Company or Operator)STATE S. 11-1
(Lease)

Well No. 1, in SE 1/4 of SE 1/4, of Sec. 29, T. 14-S, R. 33-E, NMPM.

Saunders

Pool,

Lea

County.

Well is 660' feet from South line and 660' feet from East line of Section 29. If State Land the Oil and Gas Lease No. is E-2426.

Drilling Commenced January 9, 1959. Drilling was Completed February 16, 1959.

Name of Drilling Contractor Noble Drilling Co.,

Address 321 Pan American Building, Tulsa, Oklahoma

Elevation above sea level at Top of Tubing Head 4234' DF. The information given is to be kept confidential until Not Confidential, 19.

OIL SANDS OR ZONES

No. 1, from 9944' to 9956' to 9968' to 9976'. No. 4, from to.
No. 2, from to. No. 5, from to.
No. 3, from to. No. 6, from to.

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8"	48# H-40	NEW	310'	Guide			Surface
8-5/8"	32 & 24#	NEW	4179'	Fleet			Intermediate
5-1/2" *	17#	NEW & SH	6133'	Fleet			Production
* LINER							

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2"	13-3/8"	310'	250	Halliburton		
12 1/4" & 11"	8-5/8"	4176'	1500	Halliburton		
7-7/8"	* 5-1/2"	10195'	600	Halliburton		
* Liner	* TOP @	4062'	200	Halliburton		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

500 Gal Western Spec 15% LST Acid

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 10200 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing February 21, 1959
OIL WELL: The production during the first 24 hours was 158 barrels of liquid of which 68% was oil; 32% was emulsion; 32% water; and 41.7% was sediment. A.P.I. Gravity 41.7
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy. 1608'	T. Devonian	T. Ojo Alamo	
T. Salt. 1692'	T. Silurian	T. Kirtland-Fruitland	
B. Salt. 2482'	T. Montoya	T. Farmington	
T. Yates. 2644'	T. Simpson	T. Pictured Cliffs	
T. 7 Rivers. 2795'	T. McKee	T. Menefee	
T. Queen. 3416'	T. Ellenburger	T. Point Lookout	
T. Grayburg	T. Gr. Wash	T. Mancos	
T. San Andres 4125'	T. Granite	T. Dakota	
T. Glorieta	T.	T. Morrison	
T. Drinkard	T.	T. Penn.	
T. Tubbs. 7011'	T.	T.	
T. Abo. 7760'	T.	T.	
T. Penn. 9368'	T.	T.	
T. Miss.	T.	T.	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0'	6'	6'	Cellar				
6'	220'	214'	Sand & Caliche				
220'	1608'	1388'	Red Bed				
1608'	1692'	84'	Red Bed & Anhy				
1692'	2482'	790'	Sand & Red Bed				
2482'	2644'	162'	Anhy & Shale				
2644'	4125'	1481'	Anhy & Sand				
4125'	5634'	1509'	Lime				
5634'	7760'	2126'	Lime & Shale				
7760'	9082'	1322'	Shale				
9082'	9368'	286'	Lime Shale & Chert				
9368'	10200'	832'	Lime & Shale				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

March 23, 1959 (Date)
Company or Operator Amerada Petroleum Corporation Address Box 636, Lovington, New Mexico
Name J. L. Swanson Position or Title Foreman