


CABOT PETROLEUM CORPORATION
J.L. Reed No. 4
990' FNL & 1650' FEL
B, 35-13S-37E Lea County, New Mexico
P & A 1/22/70

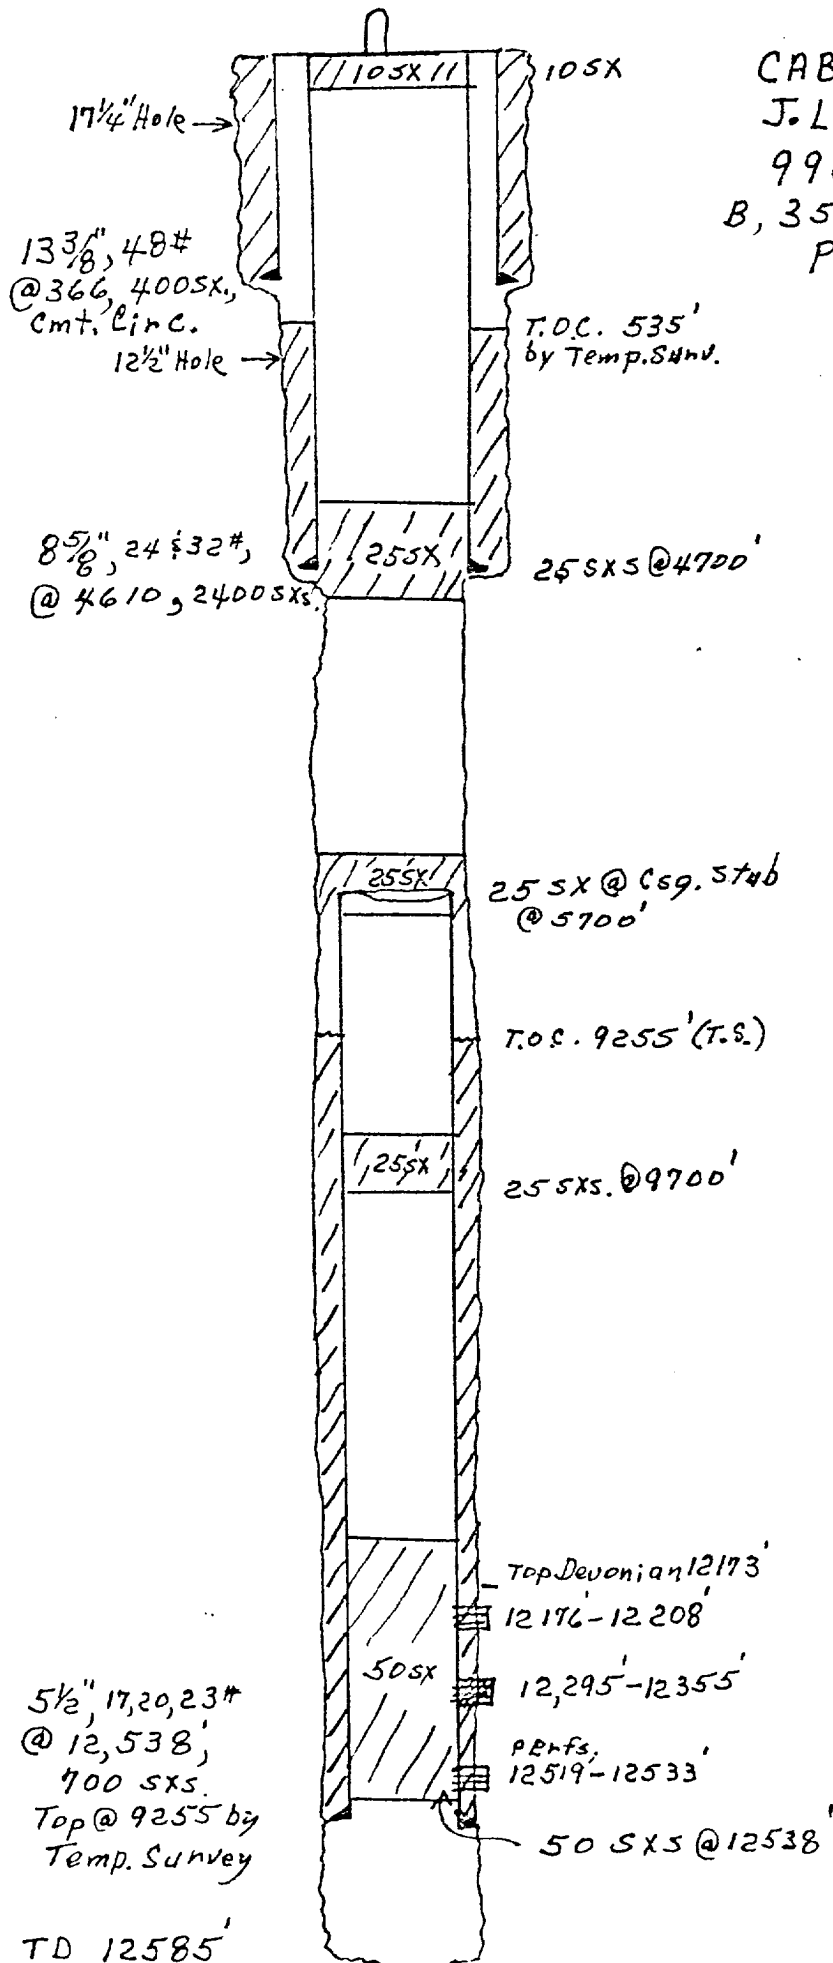

Southeastern New Mexico

T. Anhy.	2180	T. Devonian	12,173
T. Salt	2290	T. Silurian	
B. Salt	3050	T. Montoya	
T. Yates	3140	T. Simpson	
T. 7 Rivers		T. McKee	
T. Queen		T. Ellenburger	
T. Grayburg		T. Gr. Wash.	
T. San Andres	4583	T. Granite	
T. Glorieta	6050	T.	
T. Drinkard		T.	
T. Tubbs	7310	T.	
T. Abo	7983	T.	
T. Penn.		T.	
T. Miss.	11,418	T.	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	This in
0	375	375	Surface gravels and sand			
375	2180	1805	Redbeds and lime			
2180	2290	110	Anhydrite			
2290	3050	760	Salt			
3050	3140	90	Anhydrite			
3140	4583	1443	Sand redbeds & anhydrite			
4583	6050	1467	Dolomite and anhydrite			
6050	7983	1933	Dolomite, sand and shale			
7983	9160	1177	Anhydrite, shale, salt & dolomite			
9160	11,110	1950	Dolomite, lime, shale and chert			
11,110	11,418	308	Sand, shale & lime			
11,418	12,045	627	Dense lime and chert			
12,045	12,173	128	Shale			
12,173	12,585	412	Dolomite			