


**DUPLICATE**

NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

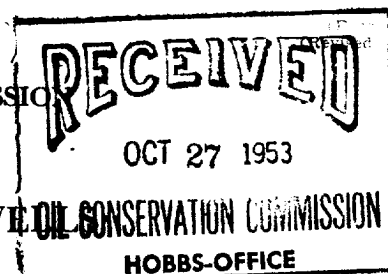

MISCELLANEOUS REPORTS ON WELL OIL CONSERVATION COMMISSION

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

October 26, 1953

(Date)

Midland, Texas

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

**Honolulu Oil Corporation**

(Company or Operator)

**Tillie Lewis**

(Lease)

**Great Western Drilling Company**

(Contractor)

Well No. **1** in the **SW**  $\frac{1}{4}$  **SE**  $\frac{1}{4}$  of Sec. **14**

T. **13-S**, R. **38-E**, NMPM, **Bronco - Devonian** Pool, **Lea** County.

The Dates of this work were as follows:

Notice of intention to do the work (☒) (was not) submitted on Form C-102 on \_\_\_\_\_, 19\_\_\_\_, (Cross out incorrect words)

and approval of the proposed plan (☒) (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

The 9 5/8" casing was to a depth of 4653' in the San Andres line and cemented with 600 sack of cement. Cementing was done by the pump and plug heated. A temperature survey taken 12 hours after the cement had been allowed to stand 12 hours found the top of the cement in the annular space behind the casing at 2670'. After the cement had been allowed to stand 60 hours a pressure of 1800 psi was applied and held for 30 minutes. There was no pressure drop at the end of 30 minutes.

Witnessed by **H. M. Stroupe**  
(Name)

**HONOLULU OIL CORPORATION**  
(Company)

**District Supt.**  
(Title)

Approved: **OIL CONSERVATION COMMISSION**

**S. J. Stanley**  
(Name)  
Engineer District  
(Title)

NOV 6 1953  
(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name **George E. Hoy**  
Position **Division Development Engineer**  
Representing **HONOLULU OIL CORPORATION**

Address **P.O. Drawer 1391, Midland, Texas**

