

NEW MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102
Supersedes C-128
Effective 1-1-65

All distances must be from the outer boundaries of the Section


Operator PHILLIPS PETROLEUM Co.			Lease LAMBRITH STATE		Well No. 1
Init Letter H	Section 36	Township 5 South	Range 32 East	County Roosevelt	
Actual Footage Location of Well:					
1980 feet from the North line and		510 feet from the East line			
Ground Level Elev. 4381.7	Producing Formation Fusselman	Pool Peterson Fusselman, South	Dedicated Acreage: 80 Acres		

1. Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

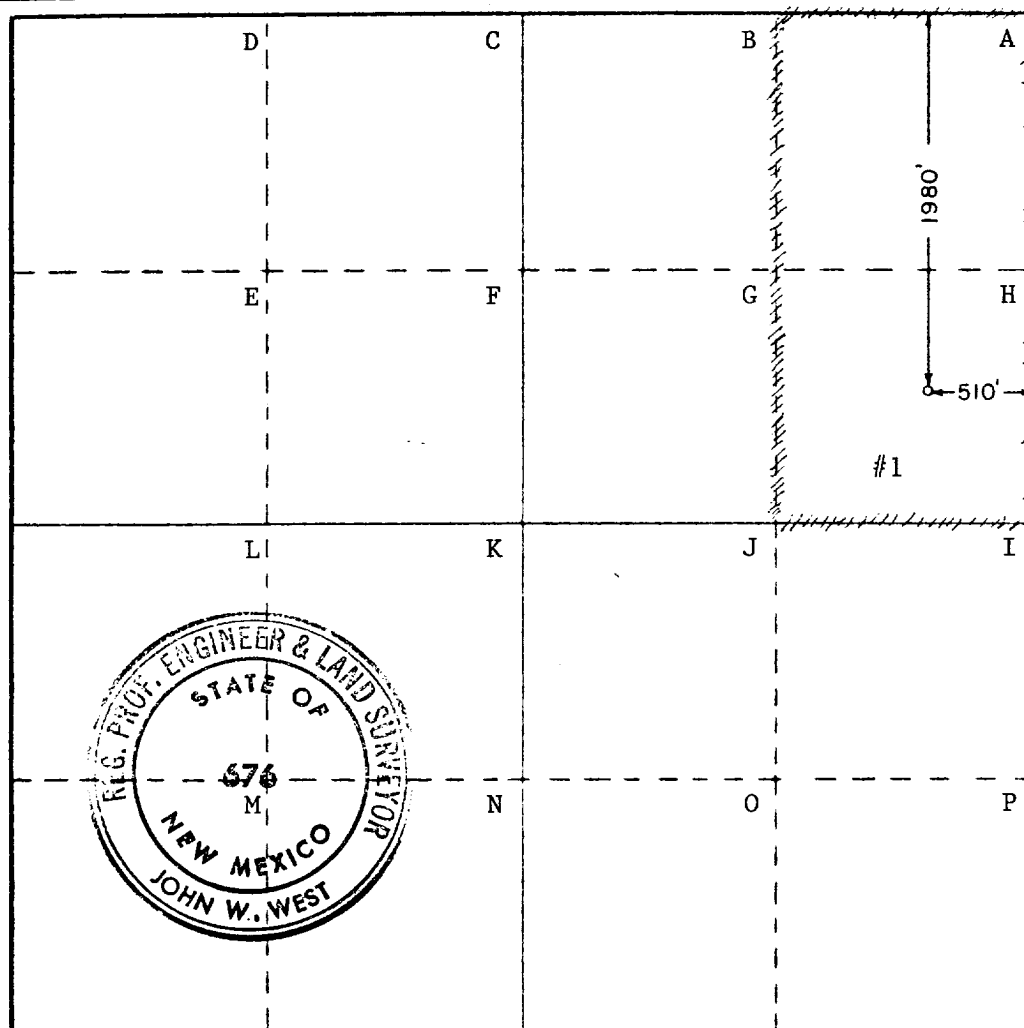

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

[Signature]
Name

W. J. Mueller

Position

Senior Engineering Specialist

Company

Phillips Petroleum Company

Date

October 22, 1979

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed

October 17, 1979

Registered Professional Engineer and/or Land Surveyor

[Signature]

Certificate No. John W. West


676

Ronald J. Eidson

3239

0 330 660 990 1320 1650 1980 2310 2640 2000 1500 1000 500

DOUBLE PREVENTER OPTION

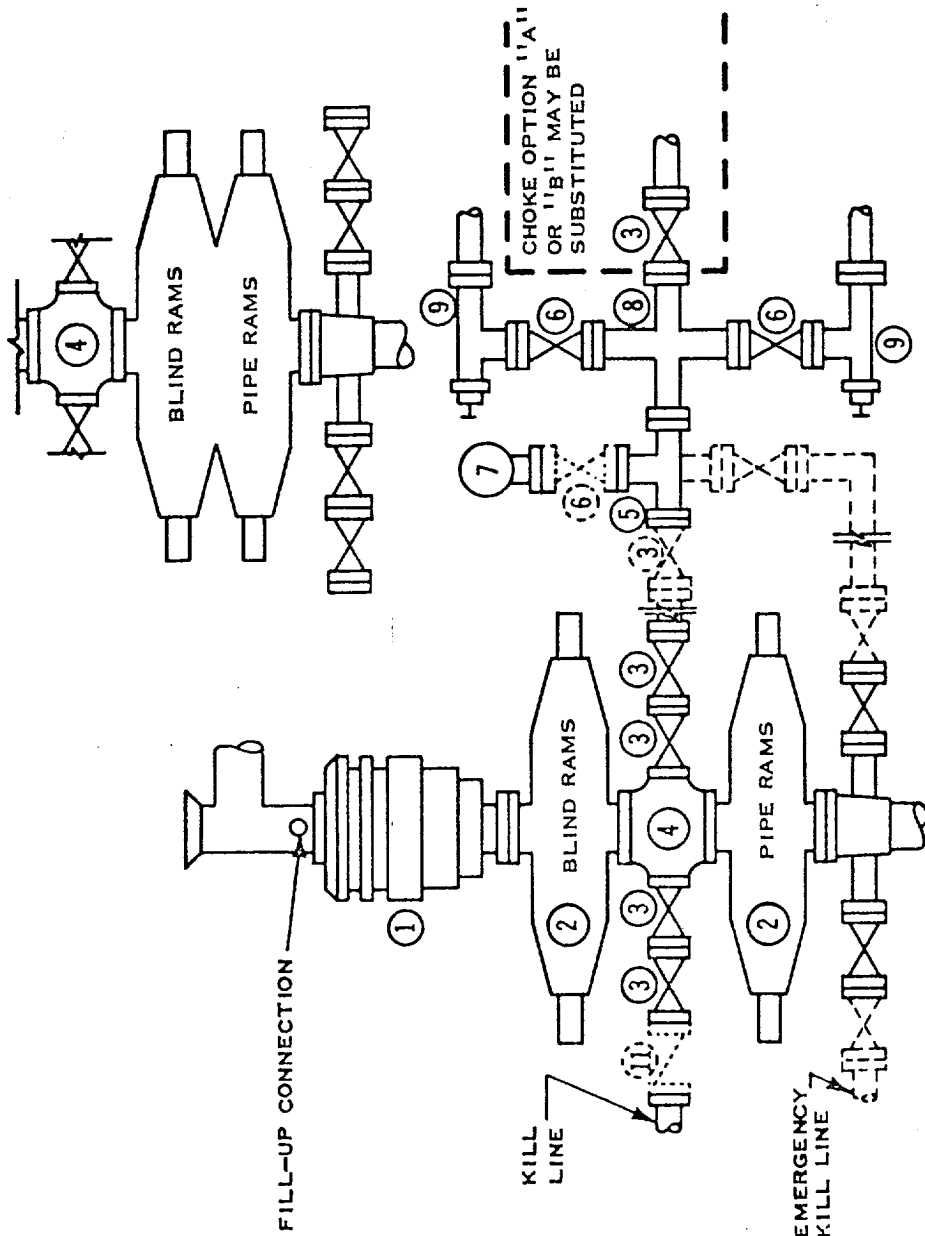

- ① SER. 900 HYDRIL 11GK 11
- ② SER. 900 RAM-TYPE BOP
- ③ 3" SER. 900 VALVE
- ④ SER. 900 DRILLING SPOOL
- ⑤ 3" SER. 900 X 2" SER. 900 STEEL TEE
- ⑥ 2" SER. 900 VALVE
- ⑦ 2" MUD PRESSURE GAUGE
- ⑧ 3" SER. 900 X 2" SER. 900 STEEL CROSS
- ⑨ 2" SER. 900 ADJ. CHOKE
- ⑩ HYDRAULIC CHOKE, 2500 PSI WP OR BETTER
- ⑪ 3" SER. 900 CHECK VALVE

NOTES:

1. 3000 PSI WP OR BETTER CLAMP HUBS MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE BOP RUN MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

..... OPTIONAL EQUIPMENT

PHILLIPS PETROLEUM COMPANY
3000 PSI WORKING PRESSURE
BLOWOUT PREVENTER HOOK-UP
(SERIES 900 FLANGES OR BETTER)

RECEIVED
OCT 24 1971
O.C.D. HOBBS, OFFICE

11

11
Prof. J. G. R. (1971)

CONTR Rial #7 DEPTH 4400' GL PD 8000' RT

F.R. 11-5-79
(Fusselman)
11-20-79 Drlg 3341' anhy
11-30-79 Drlg 6437' lm
12-12-79 TD 7971'; Cure
1-11-80 TD 7971'; PBD 7918'; Flwg
Perf (Fusselman) 7797-7801', 7804-08', 7812-18',
w/2 SPF
Acid (7797-7818') 1500 gals (15%)
Flwd 175 BO + 70 BW in 24 hrs thru 24/64" chk,
TP 70# (7797- 7818')
1-25-80 TD 7971'; PBD 7918'; DOC
Sqzd 7797-7818 w/100 sx
2-8-80 TD 7971'; PBD 7825'; SI WO Eval
Perf (Fusselman) 7865-70' w/4 SPF
Swbd 65 BW w/NS in 5 hrs (7865-70')
PE to 7852'
Perf (Fusselman) 7828-33' w/4 SPF
Acid (7828-33') 1000 gals (15%)
Swbd 4 BO + 80 BSW in 5 hrs (7828-33')
Set BP @ 7825' 4-2-36 NM

ROOSEVELT
PHILLIPS PETROLEUM CO. 1 Lambirth State
Sec 36, T5S, R32E

NM
Page #2

2-28-80

Continued

Perf (Fusselman) 7796-7806' w/4 SPF
Acid (7796-7806') 500 gals (15%)
Swbd 80 PR w/NS in 4 hrs (7796-7806')

4-7-80

TD 7871'; PBD 7825'; Complete
LOG TOPS: Gestler 1898', Yates 2078', San
Andres 3099', Glorieta 4347', Tubb 5738',
Abo Shale 6494', Brown Dolomite 7046',
Hueco 7122', 3 Brothers 7440', Bough "C"
7590', Gills 7682', Fusselman 7795'

4-12-80

COMPLETION ISSUED

5-17-80

RE-ISSUE TO ADD PAGE 2 INFORMATION FORMERLY
INCLUDED WITH HARTMAN, DOYLE, 1 JALMAT FEDERAL
COM., DEW COUNTY, SEC 6, T25S, R37E, TICKET
4-2-36 NM

5-17-80

Continued

ISSUED 4-12-80 on TICKET ONLY

4-2-36 NM
IC 30-041-70036-79