

DIVISION Southern FIELD Granite wash LOCATION 1874' ENL, 766' FEL

WELL PROFILE

TD	7900'	ELEVATION	4402.3 GR
PBTD	7868'	DATUM POINT ELEVATION	4418.1 KB

CASING DESIGN


SIZE	WEIGHT	GRADE	THREAD	COUPLING	MAKE	NO JTS	FOOTAGE	SACKS
13 3/8	48	H40	8RD	ST&C		9	369'	350
8 5/8	24/32	J55	8RD	ST&C		83	3293'	1400
4 1/2	10.5/11.6	K55	8RD	LT&C, ST&C		205	7880'	400
TOC @ 6816'								
2 3/8	tbq						7795'	

PERFORATED INTERVAL	FORMATION	REMARKS
7695-7859	Granite wash	Acid w/4000 gals 7 1/2% NEFE. Frac w/40,000 gals versagel + 45,000# 20-40 sand.

COMMENTS:

IP (10/8/80): P 12 BOPD, 18 BWPD, 67.8 MCFD

4/24/84: Set cmt rtmr at 7684'. Sqz granite wash perms w/75 sx Class "H" neat cmt. Spot 250 gals 10% MSA across Cisco. Perf 7577-79', 82', 91', 7600', 07,10', and 28-38'. Acidize w/4000 gals NEFE w/1000 SCF N2/bbl. IPF 340MCFD; Before 2 BOPD.

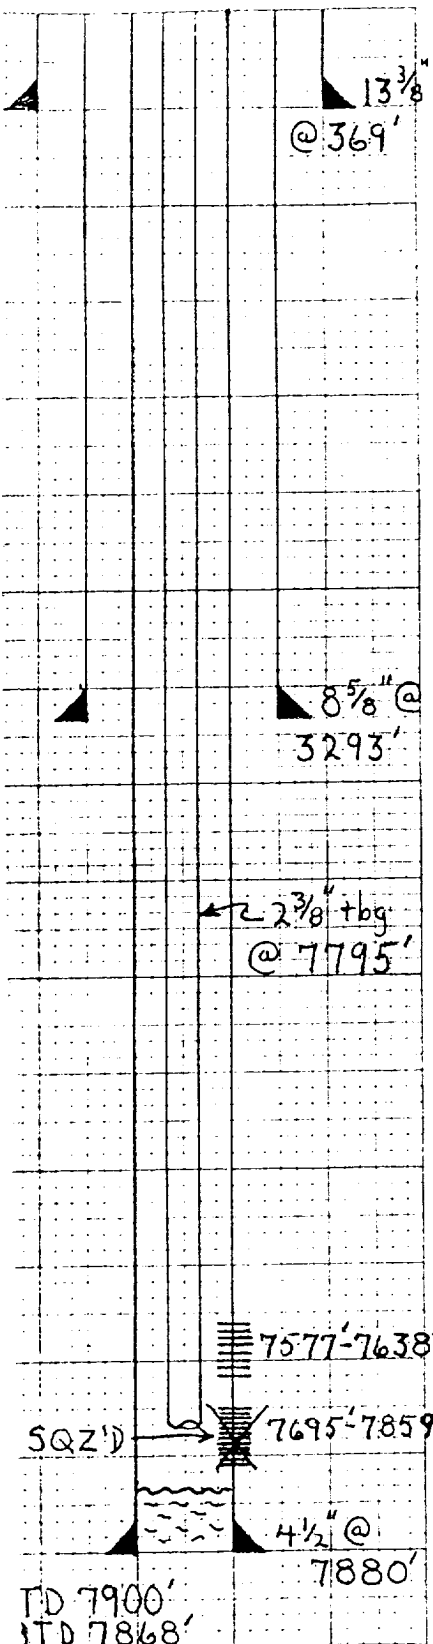

SUBMITTED BY Michael L. Jones DATE 12/18/85 APPROVED BY _____

Michael L. Jones

RECEIVED
DEC 20 1985
O.C.D.
HOBBS OFFICE