


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION

SANTA FE, NEW MEXICO

MISCELLANEOUS NOTICES

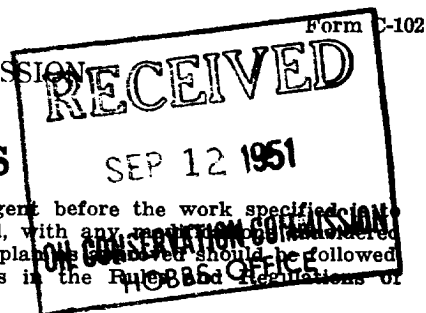

Submit this notice in triplicate to the Oil Conservation Commission or its proper agent before the work specified herein begin. A copy will be returned to the sender on which will be given the approval, with any recommendation considered advisable, or the rejection by the Commission or agent, of the plan submitted. The plan submitted should be followed and work should not begin until approval is obtained. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of notice by checking below:

NOTICE OF INTENTION TO TEST CASING SHUT-OFF	<input checked="" type="checkbox"/>	NOTICE OF INTENTION TO SHOOT OR CHEMICALLY TREAT WELL	
NOTICE OF INTENTION TO CHANGE PLANS		NOTICE OF INTENTION TO PULL OR OTHERWISE ALTER CASING	
NOTICE OF INTENTION TO REPAIR WELL		NOTICE OF INTENTION TO PLUG WELL	
NOTICE OF INTENTION TO DEEPEN WELL			

Monument, New Mexico

Place

September 8, 1951

Date

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico

Gentlemen:

Following is a notice of intention to do certain work as described below at the.....

Amerada Petroleum Corporation **State S "B"** Well No. **6** in **NW/4, SE/4**
Company or Operator Lease

of Sec. **3**, T. **15-S**, R. **33-E**, N. M. P. M., **Saunders** Field.
Lee County.

FULL DETAILS OF PROPOSED PLAN OF WORK

FOLLOW INSTRUCTIONS IN THE RULES AND REGULATIONS OF THE COMMISSION

9910' - Total Depth - Lime. Finished drilling 7-7/8" hole at 6:15 PM, 9/5/51.
Ran Schlumberger's Electrical, Gamma Ray & Microlog Surveys. Ran 5 1/2" casing as follows:

31 Jts 5 1/2" OD 17# M-80 8-RT R-3 SS Csg., LT&C, New - - 1241.91'
4 Jts 5 1/2" OD 17# J-55 8-RT R-2 SS Csg., LT&C, New - - 131.10'
78 Jts 5 1/2" OD 17# J-55 8-RT R-2 SS Csg., LT&C, New - - 2267.96' (Italian)
109 Jts 5 1/2" OD 15.5# J-55 8-RT R-2 SS C g., LT&C New - 3482.66' (Italian)
55 Jts 5 1/2" OD 17# J-55 8-RT R-2 SS Csg., LT&C, New - - 1544.49' (Italian)
31 Jts 5 1/2" OD 17# M-80 8-RT R-3 SS Csg., LT&C, New - - 1250.71'

Total of 308 Jts 5 1/2" casing set at 9910' & cemented with 600 sacks also-set cement mixed 3% jel & 1/4# flo-seal per sack. Ran 7 Baker Centralizers spaced 30' apart from 9715' to 9895' and 14 Weatherford Scratchers spaced 15' apart in above section. Pumped plug to 9827' at 8:30 AM, 9/8/51 - Max Pump pressure, 1600#. After W.O.C. approximately 24 hours we will test casing shut-off.

Approved..... SEP 12 1951 19.....
except at follows:

Amerada Petroleum Corporation
Company or Operator

By *Don Tupper*
Position **Assistant District Superintendent**
Send communications regarding well to

OIL CONSERVATION COMMISSION,

By *Ray Yumbough*
Title **Oil & Gas Inspector**

Name **Amerada Petroleum Corporation**
Address **Drawer D, Monument, New Mexico**