


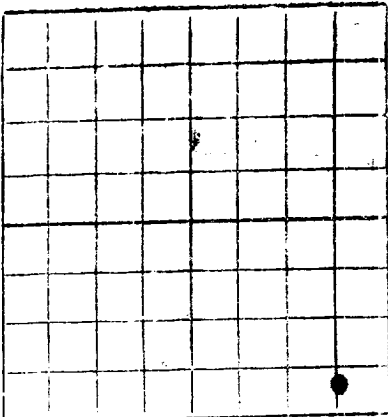

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

MODES C Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPPLICATE. If State Land submit 6 Copies

Sinclair Oil & Gas Company
(Company or Operator)

Seaman Unit
(Lessee)

Well No. 1, in SE 1/4 of SE 1/4, of Sec. 13, T. 16S, R. 33E, NMPM.

Wildest

Pool,

Los

County.

Well is 510 feet from South line and 660 feet from East line

of Section 13. If State Land the Oil and Gas Lease No. is E-912

Drilling Commenced 12:30AM, March 27, 1956, 19 Drilling was Completed September 14, 1956

Name of Drilling Contractor A. W. Thompson, Inc.

Address Houston, Texas

Elevation above sea level at Top of Tubing Head 4159 The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 11219 to 11265 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8	48	N	336	None	None		
9 5/8	36 & 40	N	4507	Float	None		
7"	26, 29, 32	N	12000	Float	None		
2 1/2" UE		N	11269				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. BAGS OF CEMENT	METHOD USED	MUD QUANTITY	AMOUNT OF MUD USED
17 1/2	13 3/8	339	400	Halliburton		
12 1/2	9 5/8	4570	3000	Halliburton		
8 3/4	7"	12000	500	Halliburton		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Perforated from 11219-11265' with 4 jet shots per ft.

No acidising or fracturing.

Result of Production Stimulation None

Orig. & 2cc:OCC

Depth Cleaned Out

cc:State Land Office, Santa Fe, N.M

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 14,797' feet, and from _____ feet to _____ feet.
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to Producing October 1, 1956

OIL WELL: The production during the first 24 hours was 612 barrels of liquid of which 100 was oil; _____% was emulsion; 121 bbl. lead water; and _____% was sediment. A.P.I. Gravity 42.7

GAS WELL: The production during the first 24 hours was _____ M.C.F. plus _____ barrels of liquid Hydrocarbon. Shut in Pressure _____ lbs

Length of Time Shut in _____

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE).

Southeastern New Mexico

Northwestern New Mexico

T. Arby	T. Devonian <u>14368</u>	T. Ojo Alamo
T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt	T. Montoya	T. Farmington
T. Yates <u>2779</u>	T. Simpson	T. Pictured Cliffs
T. 7 Rivers <u>3044</u>	T. McKee	T. Menefee
T. Queen <u>3648</u>	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres <u>4456</u>	T. Granite	T. Dakota
T. Glorietta <u>5966</u>	T.	T. Morrison
T. Drunkard	T.	T. Penn.
T. Tubbs <u>7153</u>	T.	T.
T. Abou <u>7928</u>	T.	T.
T. Permian <u>10460</u>	T.	T.
T. Miss.	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	1475	1475	Red bed and sand				
1475	1575	100	Red bed and anhydrite				
1575	2910	1335	Anhydrite and salt				
2910	3695	785	Anhydrite and sand				
3695	4056	361	Anhydrite				
4056	4100	44	Anhydrite and shale				
4100	4159	59	Anhydrite and Gyp.				
4159	4468	309	Anhydrite				
4468	8006	3538	Lime				
8006	13185	5179	Lime, shale and sand				
13185	13440	255	Sand, Lime and chert				
13440	13693	253	Lime and shale				
13693	14166	473	Lime and chert				
14166	14797	631	Lime and shale				
<u>Set Plug at 12,758'</u>							

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator Sinclair Oil & Gas Company Address 520 East Broadway, Hobbs, New Mexico
Name C.C. Salter Position or Title District Supt.
Date October 15, 1956