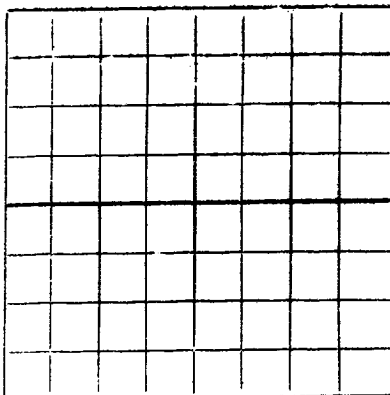


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

Western Oil Fields Inc. Phillips State
(Company or Operator) (Lease)

Well No. 5, in NW 1/4 of NE 1/4, of Sec. 20, T. 17 S, R. 33 E, NMPM.

Neijomar Pool, Lea County.

Well is 660 feet from North line and 1900 feet from East line of Section 20. If State Land the Oil and Gas Lease No. is B 2140

Drilling Commenced June 7, 1955 Drilling was Completed June 29, 1955

Name of Drilling Contractor Donnell Drilling Co.

Address Odessa Texas

Elevation above sea level at Top of Tubing Head 4211 The information given is to be kept confidential until , 19.

OIL SANDS OR ZONES

No. 1, from 4215 to 4228 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10 3/4"	40	Used	271'	None			Surface
7"	23	New	4493	Float		* see below	Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13 3/4"	10 3/4"	271	300	Plug		
8 3/4"	7"	4493	1900	Plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

* Perforations: 4211-20; 4321-30; 4335-42; 4364-76; 4384-90; 4390-4426.

Sandfraced with 5000 sand and 4500 gals. Vis-o-frac.

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 12500 feet to 1500 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing July 7, 1955

OIL WELL: The production during the first 24 hours was 20 barrels of liquid of which 10 was
was oil; 0% was emulsion; 0% water; and 0% was sediment. A.P.I.
Gravity 30

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy		T. Devonian	T. Ojo Alamo
T. Salt	1460	T. Silurian	T. Kirtland-Fruitland
B. Salt	2470	T. Montoya	T. Farmington
T. Yates		T. Simpson	T. Pictured Cliffs
T. 7 Rivers		T. McKee	T. Menefee
T. Queen		T. Ellenburger	T. Point Lookout
T. Grayburg	1110	T. Gr. Wash	T. Mancos
T. San Andres	2430	T. Granite	T. Dakota
T. Glorieta		T.	T. Morrison
T. Drinkard		T.	T. Penn.
T. Tubbs		T.	T.
T. Abo		T.	T.
T. Penn.		T.	T.
T. Miss.		T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	270	270	shale				
270	1460	1190	sand, shale, anhy				
1460	2470	1010	salt				
2470	4215	1745	dolomite				
4215	4230	15	sand				
4230	4324	94	dolomite				
4324	4330	6	sand				
4330	4344	14	dolomite				
4344	4430	86	sand with streaks of dolomite				
4430	4500	70	dolomite				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far
as can be determined from available records.

July 7 1955
Company or Operator Eastern Oil Fields Inc. Address 1027 Grant St. Denver Colo.
Name Production Unit. Position or Title