


YATES PETROLEUM CORPORATION
York ARQ #1
Section 12-T16S-R34E
Lea County, New Mexico

SUNDRY NOTICE CONTINUED:

follows: 13031-13037' w/28 holes; 13067-13080' w/56 holes and 13101-13115' w/60 holes (4 SPF - Morrow). TOOH with casing guns and rigged down wireline. TIH with wireline set 10K Uni VI packer. Set packer with top of packer at 12953'. TOOH with wireline. TIH with on/off tool on 2-7/8" L-80 tubing. Nippled down BOP. Spaced out. Nippled up tree. Pressured up tubing to 500#. Pump out plug. Swabbed. Shut well in.
5-13-98 - Bled off and flared to pit. Ran swab. Rigged up treesaver. Acidized perfs 13031-13115' with 1500 gallons 7-1/2% iron control HCL acid with mutual solvent with 1750 scf N2/bbl with ball sealers and 2500 scf/bbl N2 on flush. Sting out of treesaver. Flowing well back to pit. Swabbed. Shut well in.
5-14-98 - Bled well down. Swabbed and flow tested. Shut well in.
5-15-98 - Bled well down. Swabbed and flow tested. Shut well in.
5-16-18-98 - Opened well to pit. Flow tested. Shut well in.
5-19-20-98 - Shut in.

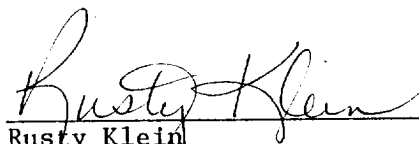

Rusty Klein
Operations Technician
May 20, 1998