

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE
(Other instructions
reverse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

LC-029405(a)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

7. UNIT AGREEMENT NAME

MCA

8. FARM OR LEASE NAME

MCA Unit 1/1

9. WELL NO.

24

10. FIELD AND POOL, OR WILDCAT

Maj. H-SA Report

11. SEC., T., R., M., OR BLE. AND
SURVEY OR AREA

Sec 20, T.17S-R.32E

12. COUNTY OR PARISH

Lea

13. STATE

NM

1.

OIL WELL ☐ GAS WELL ☐ OTHER

Water Injection

2. NAME OF OPERATOR

Continental Oil Company

3. ADDRESS OF OPERATOR

P. O. Box 460, Hobbs, NM 88240

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)

At surface

660' 7N + 1980' 7E 2 of Sec 20

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

4014' df

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐FRACTURE TREAT ☐SHOOT OR ACIDIZE ☐REPAIR WELL ☐

(Other)

PULL OR ALTER CASING ☐MULTIPLE COMPLETE ☐ABANDON* ☐CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐FRACTURE TREATMENT ☐SHOOTING OR ACIDIZING ☐

(Other)

REPAIRING WELL ☐ALTERING CASING ☐ABANDONMENT* ☐(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any
proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones perti-
nent to this work.)*

Dred. bridge at 3930'. Jettied on C/O 3918-4103'. Set 4 1/2" 9.5# csg. at 3995'. Cmtl with 125 lbs Class "C" cmt. Cmt. did not circulate. TOC at 2700'. PBD at 3956'. Dred. cmt. and shoe at 3995'. Dred and pushed plug to 4060'. C/O 4060-4106'. Perf 4 1/2" csg w/ 1 JSP 3 at 3709', 13', 18', 52', 56', 60' and 3764'. Intd Perfs 3764-3782' w/ 600 gallons 15% NE acid. Intd Perfs 3718-3709' w/ 500 gallons 15% NE acid. 2 acid Perfs 3709-3764 w/ 10,000 gallons T7GW and 20,000# 20/40 sd.

Completed - 7-10-73

18. I hereby certify that the foregoing is true and correct

SIGNED

M. E. Harkley

TITLE

Admin. Supervisor

DATE


7-31-73

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

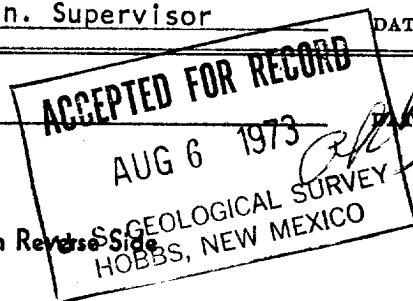

*See Instructions on Reverse Side

USGS-5 FILE

MCA-3