

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
N.M. Oil Cons
1980
Hobbs, NM 88241

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Conoco, Inc.

3. Address and Telephone No.

10 Desta Dr., Suite 100W., Midland, TX 79705 (915) 686-6548

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2615' FNL & 1345' FEL
Section 30, T-17S, R-32E

5. Lease Designation and Serial No.
LC 029410B

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

M.C.A. No. 278

9. API Well No.

30-025-23930

10. Field and Pool, or Exploratory Area

Maljamar Gray-SA

11. County or Parish, State

Lea County, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

1. Circulate hole with mud.
2. Spot 25 sxs cement on top of R.B.P. at 3685'.
3. Spot 25 sxs cement 2275' - 2525'.
4. Spot 25 sxs cement 625' - 875'.
5. Spot 10 sxs cement surface plug.
6. Install dryhole marker and clean location.

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

14. I hereby certify that the foregoing is true and correct

Signed Ray Maddox

Title Regulatory Agent

Date 11/3/97

(This space for Federal or State office use)

Approved by ORIG SCDJ DAVID E. GLAN

Title PETROLEUM ENGINEER

Date NOV 07 1997

SEE ATTACHED FOR

CONDITIONS OF APPROVAL

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

9/9/97

T.D. © 4040'

Squeeze cemented 5 1/2" x 8 5/8" annulus with 125 sxs cement from 743' to surface using coiled tubing.

SPOT 25 SXS CEMENT 625'-875'

750' - 8 5/8" Casing. Cemented w/400 sxs. Circulated.

SPOT 25 SXS CEMENT 2275'-2525'

T.O.C. @ 2400' (Temp. Survey)

SPOT 25 SXS CEMENT ON TOP OF R.B.P. 3435'-3685'

R.B.P. © 3685'

Perfs 3710'-3985'


4040' - 5 1/2", 14#. Casing. Cemented w/300 sxs

CONOCO, INC.
M.C.A. Unit #278
2615' FNL & 1345' FEL
Sec. 30, T-17S, R-32E
Lea County, NM

CURRENT WELLBORE

9/9/97

Elev. = 3908' GR

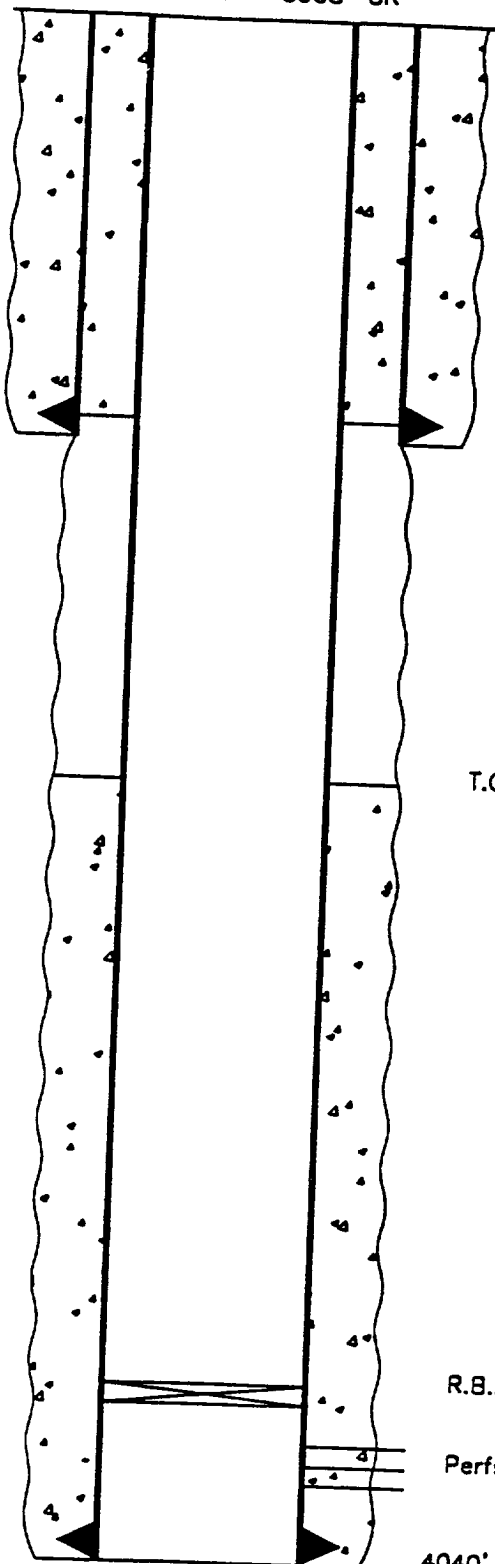

Squeeze cemented 5 1/2" x 8 5/8" annulus with 125 sxs cement from 743' to surface using coiled tubing.

750' - 8 5/8" Casing. Cemented w/400 sxs. Circulated.

T.O.C. • 2400' (Temp. Survey)

R.B.P. • 3685'

Perfs 3710'-3985'

4040' - 5 1/2", 14#, Casing. Cemented w/300 sxs

T.D. • 4040'

CONOCO, INC.

M.C.A. Unit #278

2615' FNL & 1345' FEL

Sec. 30, T-17S, R-32E

Lea County, NM