


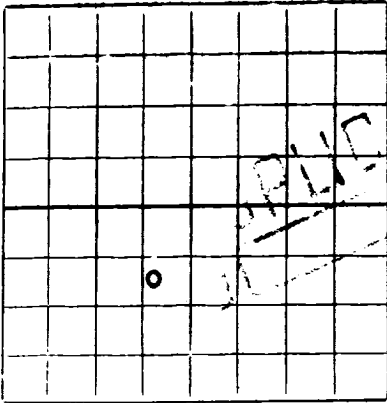

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

Morris R. Antweil

(Company or Operator)

State "O"

(Lease)

Well No. 2, in NE 1/4 of SW 1/4, of Sec. 31, T. 18S, R. 37E, NMPM.

Eumont

Pool,

Lea

County.

Well is 2289.54 feet from west line and 1650 feet from south line

of Section 31. If State Land the Oil and Gas Lease No. is B-1713

Drilling Commenced December 5, 1955 Drilling was Completed December 17, 1955

Name of Drilling Contractor Jennings Drilling Company

Address Hobbs, New Mexico

Elevation above sea level at Top of Tubing Head 3741'

The information given is to be kept confidential until

, 19

OIL SANDS OR ZONES

No. 1, from 3918 to 3960 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10 3/4"	32.70	Used	317'	TP Guide			
7"	26	Used	3976'	Halco Float		3948'-3958'	Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15	10 3/4	300'	150	Pump & Plug	9	45 sks. Jel
8 3/4	7	3976'	250	Pump & Plug	10.1	40 sks. Salt Jel
						40 sks. Starch

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

5000# sand, 187 barrels of oil, sandfraced.

Result of Production Stimulation 63 barrels oil in 10 hours on a 20/64" choke.

Depth Cleaned Out

CORD OF DRILL-STEM AND SPECIAL T

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach heret.

TOOLS USED

Rotary tools were used from 0 feet to 3976' feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing December 21, 1955
OIL WELL: The production during the first 24 hours was 151 barrels of liquid of which 100 was oil: - was emulsion: / - water and - was sediment. A.P.I. Gravity 34
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico				Northwestern New Mexico			
T. Anhy.	1475'			T. Devonian			T. Ojo Alamo
T. Salt	1575'			T. Silurian			T. Kirtland-Fruitland
B. Salt	2650'			T. Montoya			T. Farmington
T. Yates	2807'			T. Simpson			T. Pictured Cliffs
T. 7 Rivers	3050'			T. McKee			T. Menefee
T. Queen	3055'			T. Ellenburger			T. Point Lookout
T. Grayburg				T. Cr. Wash			T. Mancos
T. San Andres				T. Granite			T. Dakota
T. Glorieta				T.			T. Morrison
T. Drinkard				T.			T. Penn.
T. Tubbs				T.			T.
T. Abo				T.			T.
T. Penn.				T.			T.
T. Miss.				T.			T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	1475	1475	Red Bed				
1475	1575	100	Anhydrite				
1575	2650	1075	Salt				
2650	2810	160	Shale, sand, anhydrite				
2810	2900	90	Sand, anhydrite				
2900	3656	756	Anhydrite, sand, shale				
3656	3680	24	Sand				
3680	3918	238	Anhydrite, shale, sand				
3918	3960	42	Oil sand				
3960	3976	16	Anhydrite, dolomite				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records

December 29, 1955 (Date)
Company or Operator Morris R. Antweil Address Box 1058, Hobbs, New Mexico
Name Ken Jennings Position or Title Agent