


ATTACHMENT "B"
WELL BORE SKETCH

OPERATOR/LEASE/WELL Salty Dog, Inc./Hobbs #1

NRE JOB NUMBER NB01-003-001 DATE July 1, 1984

FIELD/POOL -- / --

PLUG BACK DEPTH 4200' KB 10' ELEVATION 3646'

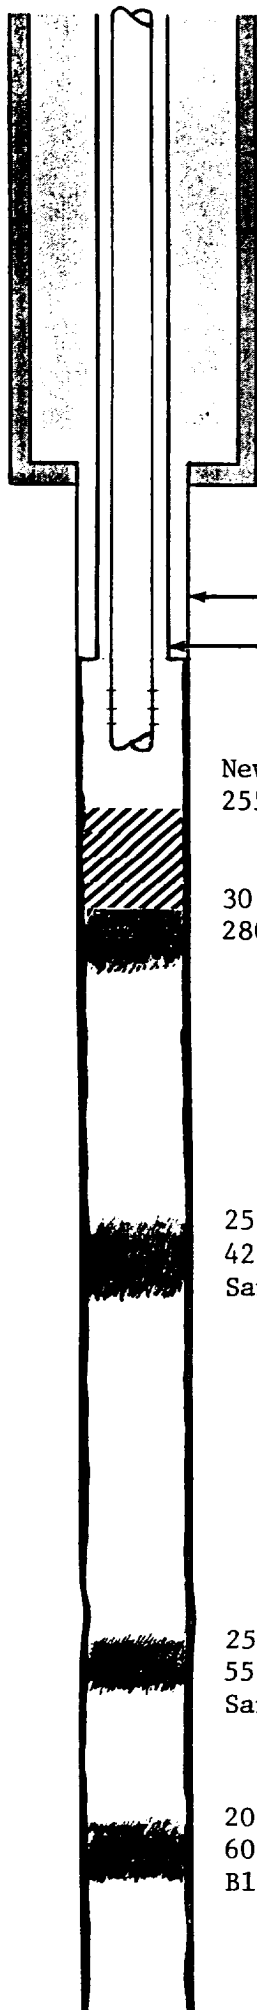

Hole Size 12-1/4"

SURFACE CASING:

Size 8-5/8" Weight 24# Grade New

Set at 306' with 255 Sacks Cement

Circulate Yes Sacks to Surface

Remarks: Cement was circulated. There is no record of the number of sacks circulated. After 24 hours WOC, casing was tested to 1000 psi for 30 minutes. Tested O.K.

Hole Size 6-3/4"

PRODUCTION CASING:

Size 5-1/2" Weight 14# Grade J-55

Set at 1700 with 300 Sacks Cement

Cement Top: Calculated surface Temperature Survey

Remarks: Cement is calculated to circulate to surface with 100% excess.

New 50 Sx Plug At
2550-2800'

30 Sx Plug At
2800', Base of Salt

TUBING:

Size 2-3/8" Weight 6.4# Grade J-55

Number of Joints 75 Set at 2250'

Packer Set at None

Bottom Arrangement: Open ended with 15' of perforations in tubing.

25 Sx Plug At
4200', Top of
San Andres

RODS:

Size _____ Number _____

Gas Anchor Set at _____

Pump Set at _____

Arrangement: _____

25 Sx Plug At
5575', Base of
San Andres

20 Sx Plug At
6000', Top of
Blinebry