


DUPLICATE
NO. 713

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

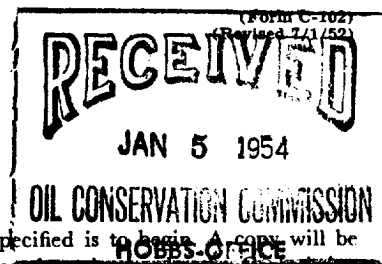

MISCELLANEOUS NOTICES

Submit this notice in TRIPLICATE to the District Office, Oil Conservation Commission, before the work specified is to begin. A copy will be returned to the sender on which will be given the approval, with any modifications considered advisable, or the rejection by the Commission or agent, of the plan submitted. The plan as approved should be followed, and work should not begin until approval is obtained. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Notice by Checking Below

NOTICE OF INTENTION TO CHANGE PLANS		NOTICE OF INTENTION TO TEMPORARILY ABANDON WELL		NOTICE OF INTENTION TO DRILL DEEPER	
NOTICE OF INTENTION TO PLUG WELL	X	NOTICE OF INTENTION TO PLUG BACK		NOTICE OF INTENTION TO SET LINER	
NOTICE OF INTENTION TO SQUEEZE		NOTICE OF INTENTION TO ACIDIZE		NOTICE OF INTENTION TO SHOOT (Nitro)	
NOTICE OF INTENTION TO GUN PERFORATE		NOTICE OF INTENTION (OTHER)		NOTICE OF INTENTION (OTHER)	

OIL CONSERVATION COMMISSION
SANTA FE, NEW MEXICO

Jal, New Mexico
(Place)

January 5, 1954
(Date)

Gentlemen:

Following is a Notice of Intention to do certain work as described below at the

R. Olsen, Personal Rocket Well No. 1 in G
(Company or Operator) (Unit)
SW 1/4 NE 1/4 of Sec. 25, T. 18S, R. 38E, NMPM, East Hobbs Pool
(40-acre Subdivision)
Laa County.

FULL DETAILS OF PROPOSED PLAN OF WORK
(FOLLOW INSTRUCTIONS IN THE RULES AND REGULATIONS)

Drilled to a total depth of 4527' in the San Andres. Took drill stem test from 4490'-4527', tool open 1 hr., recovered 1700' of sulfur water. Drill stem test was also taken from 3850'-3882' in 7-Rivers, tool open 30 minutes, recovered 10' drilling mud. Flowing pressure 0#, build up pressure 0#. Therefore, determined well should be plugged as no oil was encountered in any pay zone. All partners have been notified of plugging operation.

We propose to set a plug at 4400' with 50 sacks of cement plug and set second plug at top of salt, 1950', with 30 sacks of cement plug, and third plug to be set at base of surface pipe at 320' with 20 sacks of cement plug. Marker will be 6' of 4" pipe cemented at top of surface.

Approved JAN 5 1954, 19
Except as follows:

Approved
OIL CONSERVATION COMMISSION
By S. J. Stanley
Title Engineer District 1

R. OLSEN, PERSONAL
Company or Operator
By S. J. Stanley
Position Vice-President
Send Communications regarding well to:

Name R. Olsen, Personal
Address Drawer 121 Jal, New Mexico