

NO. OF COPIES RECEIVED		
DISTRIBUTION		
SANTA FE		
FILE		
U.S.G.S.		
LAND OFFICE		
OPERATOR		

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease
State <input checked="" type="checkbox"/> Fee <input type="checkbox"/>
5. State Oil & Gas Lease No.
E-580

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator Gulf Oil Corporation	8. Farm or Lease Name Lea "FF" State
3. Address of Operator Box 670, Hobbs, New Mexico 88240	9. Well No. 5
4. Location of Well UNIT LETTER F , 2080 FEET FROM THE North LINE AND 2080 FEET FROM THE West LINE, SECTION 11 TOWNSHIP 17-S RANGE 34-E NMPM.	10. Field and Pool, or Wildcat Under North Vacuum Abo
15. Elevation (Show whether DF, RT, GR, etc.) 4048' OL	12. County Lea

16.

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:

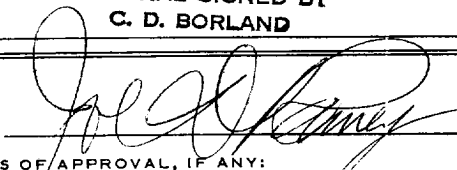
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input checked="" type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input checked="" type="checkbox"/>	OTHER <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

MoVay Drilling Company spudded 12-1/4" surface hole at 11:00 AM, January 14, 1971. Drilled to 1720'. Ran 56 joints, 1699' of 8-5/8" OD 2 1/2" K-55 ST&C casing set and cemented at 1717' with 620 sacks of Class C cement with 4% gel and 200 sacks of Class C with 2% Ca Cl2. Cement Circulated. WOC & NU 18 hours. Tested casing with 1500#, 30 minutes, OK.

Started drilling 7-7/8" hole at 1720' at 7:00 PM, January 16, 1971.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

ORIGINAL SIGNED BY SIGNED C. D. BORLAND	TITLE Area Production Manager	DATE January 18, 1971
APPROVED BY 	TITLE SUPERVISOR DISTRICT	DATE JAN 19 1971
CONDITIONS OF APPROVAL, IF ANY:		

[REDACTED]

JAN 10 1971

CH. C. FERNANDEZ, JR.
2000 N. 1st St.