


CONTINENTAL OIL COMPANY
Blow-out Preventer Specifications

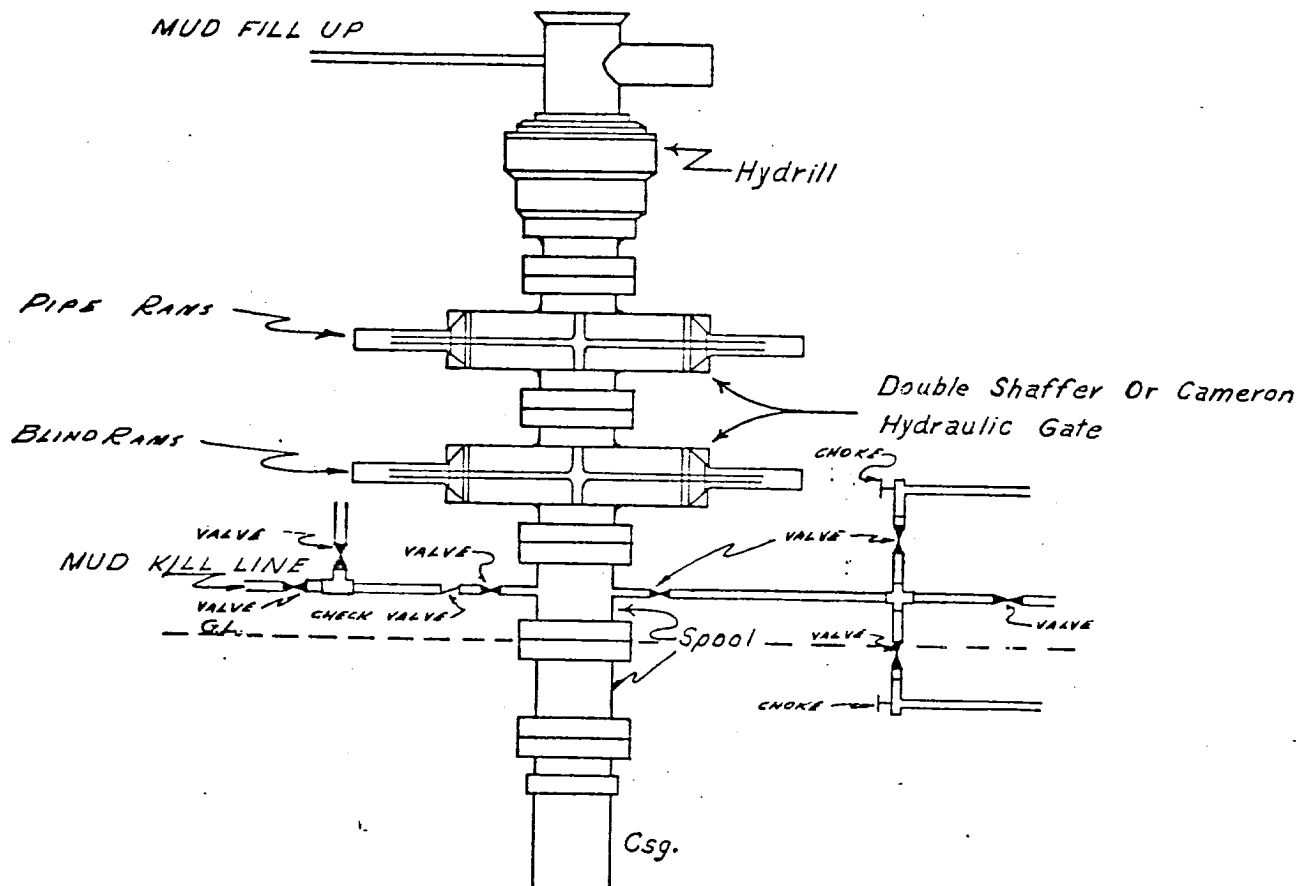

NOTE:

Manual and Hydraulic controls with closing unit no less than 75' from well head.
Remote controls on rig floor.

**DUE TO SUBSTRUCTURE CLEARANCE,
HYDRILL MAY OR MAY NOT BE USED.**

RECEIVED
SEP 24 1962
U.S. AIR FORCE
RECORDS OFFICE