

|                        |  |
|------------------------|--|
| NO. OF COPIES RECEIVED |  |
| DISTRIBUTION           |  |
| SANTA FE               |  |
| FILE                   |  |
| U.S.O.S.               |  |
| LAND OFFICE            |  |
| OPERATOR               |  |

50. Indicate Type of Lease  
State ☒ Fee ☐  
5. State Oil & Gas Lease No.  
**B-1520-1**

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. ☒ OIL WELL ☐ GAS WELL ☐ OTHER-  
2. Name of Operator  
**Mobil Producing Texas & New Mexico Inc.**  
3. Address of Operator  
**9 Greenway Plaza, Ste 2700, Houston, Tx 77046**  
4. Location of Well  
UNIT LETTER **A** **660** FEET FROM THE **North** LINE AND **460** FEET FROM  
THE **East** LINE, SECTION **12** TOWNSHIP **17S** RANGE **34E** NMPM.  
15. Elevation (Show whether DF, RT, GR, etc.)  
**GL. 4016'**  
7. Unit Agreement Name  
**North Vacuum Abo Unit**  
8. Farm or Lease Name  
**Vacuum Abo North**  
9. Well No.  
**233**  
10. Field and Pool, or Wildcat  
**Vacuum Abo North**  
12. County  
**Lea**

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐ REMEDIAL WORK ☐ ALTERING CASING ☐  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐ COMMENCE DRILLING OPS. ☐ PLUG AND ABANDONMENT ☐  
PULL OR ALTER CASING ☐ OTHER Reason for communication ☒  
OTHER ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.


8 5/8" slip on casing head  
completely welded to 8 5/8" csg

20", 94#, H40 set @ 30'  
cmt to surface

13 3/8", 48#, H40 set @ 400'  
cmt to surface

8 5/8", 32#, K55 & 24#, S90 set @ 5000'  
cmt to surface

5 1/2", 17#, N80 & 15.5#, K55 set @ 8798'  
Top of liner @ 4770'

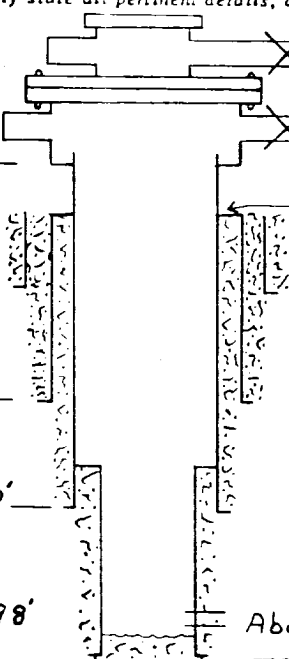

Both of these casing valves are  
directly connected to the 8 5/8" casing,  
therefore both valves are in communication

13 3/8" csg is partially welded to  
the 8 5/8" csg with a steel plate.

Abo perms: 8656' - 8725' OA.  
TD 8800' PBTD 8775'

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED **Nancy Lewis**

TITLE **Authorized Agent**

DATE **6-3-85**

ORIGINAL SIGNED BY JERRY SEXTON  
DISTRICT SUPERVISOR

**JUN 10 1985**

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

RECEIVED

JUN -6 1985

O.S.D.  
HOBBS OFFICE