


# MERIDIAN OIL

FIELD: CORBIN (YATES) DATE SPUD: 2/20/96 COMP: \_\_\_\_\_  
 LEASE: SOUTH CORBIN FEDERAWELL NO. 1 ELEVATION: 3,842 G.L.  
 LOCATION: 466' FNL & 2310' FEL; SEC. 20, T-18-S, R-33-E  
 Lea County, New Mexico

| SIZE  | WT. | GRD. | CPLG. | DEPTH        |
|-------|-----|------|-------|--------------|
| 5-1/2 | 17# | 8-95 | LTC   | 0'-1205'     |
| 5-1/2 | 17# | N-90 | LTC   | 1205'-11391' |

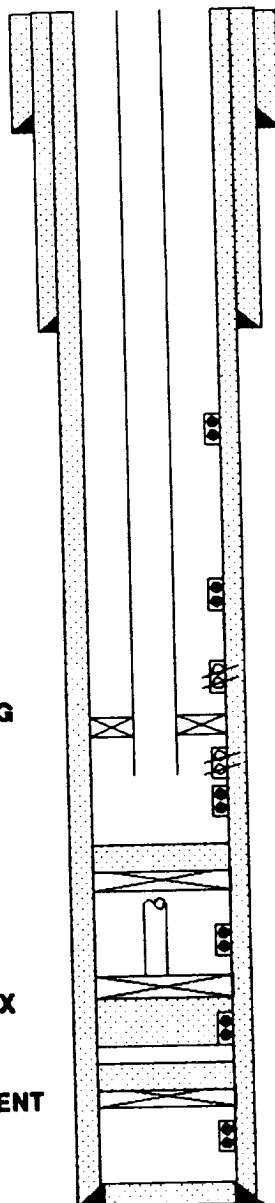

13 3/8", 54.5#, 12.5151D @ 381'  
 CEMENT W/ 420 ex  
 TOC: SURFACE (Circ.)  
 In 17-1/2" Hole

8 5/8", 24.32# @ 2931'  
 CEMENT W/ 1315 SX, TOC @ SURF.

YATES PERFS  
 3036'-51'

DELAWARE PERFS  
 4987'-75'

SQUEEZE HOLES 5150'-52'  
 SQUEEZE W/ 215 SX

BONE SPRING PERFS  
 6972'-92' (squeezed w/ 200 ex).

7337'-55', 7338'-74'  
 10,425'-43', 10,559'-79' (squeezed w/ 150 ex)

WOLFCAMP PERFS  
 10,886'-932'

5 1/2", 17.20# @ 11,391'  
 CEMENT W/ 300 ex  
 1ST DV TOOL @ 10,188' W/ 650 SX  
 2ND DV TOOL @ 7005' W/ 1580 SX  
 TOC @ SURFACE (CIRC.)  
 In 7 7/8" Hole

237 JTS (7456") 2-3/8", J-55 TBG  
 TAC @ 7040'

CIBP @ 9850' + 30 SX  
 CUT 2-7/8" TBG @ 9902'  
 555' LEFT IN HOLE

CICR @ 10,457'  
 SQUEEZE W/ 150 SX

CIBP @ 10,764'  
 CAP W/ 35 SX CEMENT

CURRENT CONFIGURATION

TD: 11,392'  
 PBTD: 11,356'

RECEIVED

SEP 18 1994

OFFICE