

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO. 300-025-2011
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. B-155-1
7. Lease Name or Unit Agreement Name NEW MEXICO "O" STATE NCT-1
8. Well No. 20
9. Pool name or Wildcat VACUUM GLORIETA

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: OIL WELL ☒ GAS WELL ☐ OTHER ☐	
2. Name of Operator TEXACO E&P INC.	
3. Address of Operator PO BOX 3109; MIDLAND, TEXAS 79701	
4. Well Location Unit Letter E : 1980 Feet From The NORTH Line and 467 Feet From The WEST Line Section 36 Township 17-5 Range 34E NMPM LEA County	
10. Elevation (Show whether DF, RKB, RT, GR, etc.) 4016' DF	

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐	ALTERING CASING ☐
PULL OR ALTER CASING ☐	COMMENCE DRILLING OPNS. ☐
OTHER: ☐	PLUG AND ABANDONMENT ☐
	CASING TEST AND CEMENT JOB ☐
	OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

- 1) NOTIFY NMOC D OF INTENT TO PLUG AND ABANDON.
- 2) RIG UPON X-SIDE. SET CMT RETAINER @ 5900' & SQZ 30 SX BELOW RETAINER IN PERF 5952-6131'.
- 3) SPOT 10 SX CMT F/ 5900'-5600'. CIRC 2 7/8" CSG W/ 25# PER BBL. SALT GEL MUD. (GLORIETA)
- 4) SPOT 10 SX CMT F/ 4404'-4104' (T SAN ANDRES 4354)
- 5) SPOT 10 SX CMT F/ 3750'-3450' (T QUEENS 3697')
- 6) SPOT 10 SX CMT F/ 2732'-2432' (T YATES 2825' B-SALT 2682')
- 7) SPOT 10 SX CMT F/ 1710'-1410' (11 3/4" CSG SHOE @ 1538')
- 8) SPOT 10 SX CMT F/ 300-SURFACE. (X-SIDE PLUGGED)
- 9) RIG UPON Y-SIDE. SET CMT RETAINER @ 5950' & SQZ 45 SX INTO PERFS @ 5983'.
- 10) SPOT 10 SX CMT F/ 5950'-5650'. CIRC 2 7/8" CSG W/ 25# PER BBL. SALT GEL MUD.
- 11) SPOT 10 SX CMT F/ 4404'-4104' (T SAN ANDRES 4354)

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE R.J. Harding III TITLE OPERATIONS ENGINEER DATE (915) 688-4814
TYPE OR PRINT NAME R.J. HARDING III TELEPHONE NO.


(THIS SPACE FOR STATE USE)
ORIGINAL FILED BY GARY SEXTON
DISTRICT SUPERVISOR

APPROVED BY _____ TITLE _____ DATE JUL 27 1995

CONDITIONS OF APPROVAL, IF ANY:

- SECRET

TEXACO
 NM O STATE NCT-1 NO. 20
 API# 30025201110000

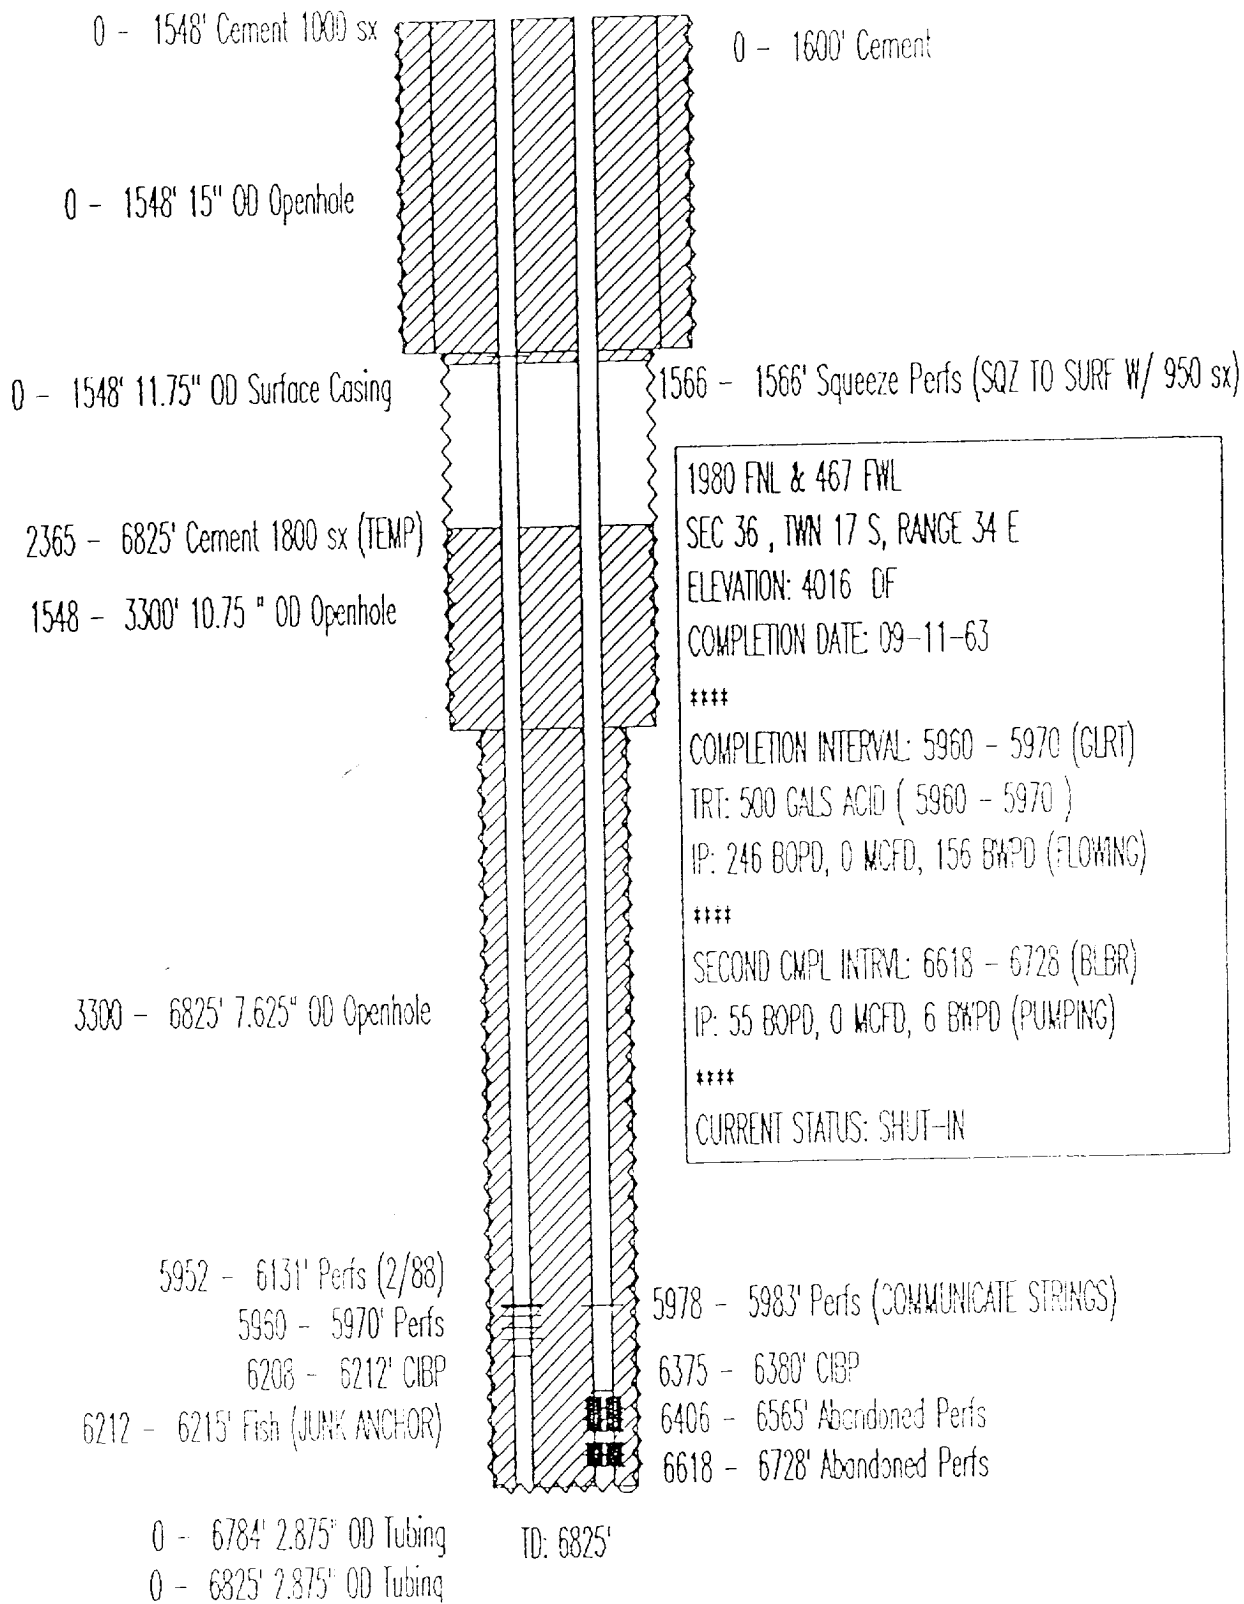

TEXACO
NM O STATE NCT-1 NO. 20
API# 30025201110000

PROPOSED
X Y

