
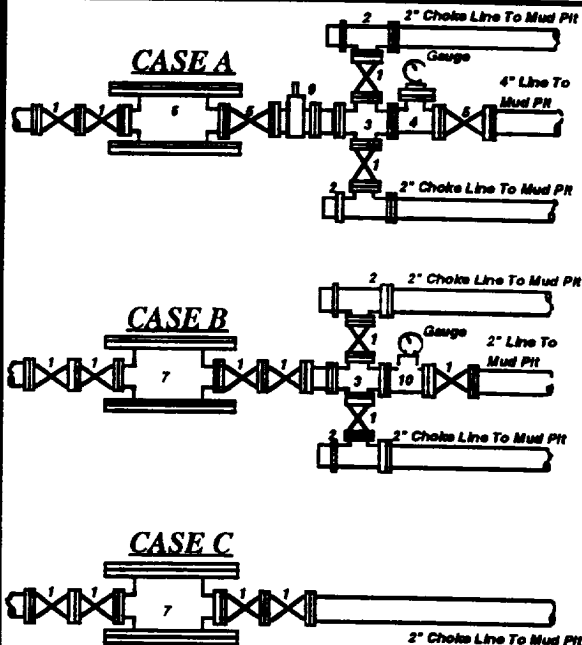


SCHEDULE B **MINIMUM BLOWOUT PREVENTER REQUIREMENTS**

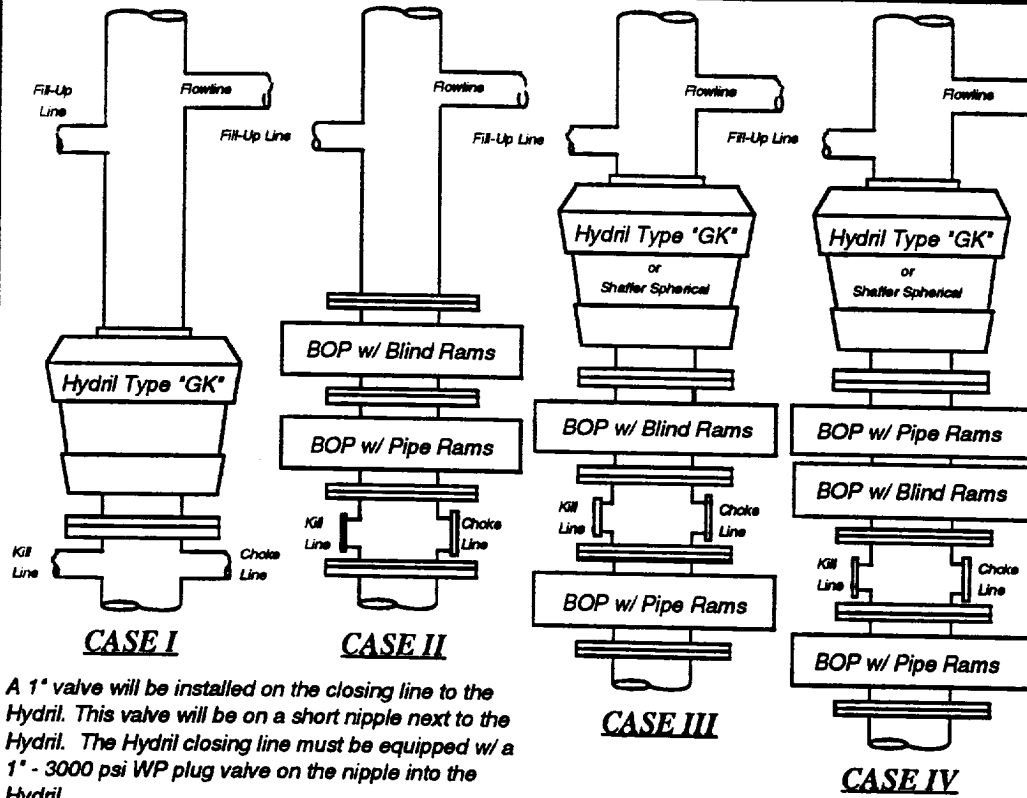

BOP SIZE	BOP CASE	WORKING PRESSURE	CHOKE CASE
7 1/2"	II	5M	C
—	—	—	—

Bradenhead furnished by Mobil will be:
Mfr: _____
Size: _____ Type: _____

Legend

- 2" flanged all steel valve must be either Cameron "F", Halliburton Low Torque or Shafter Flo-Seal.
- 2" flanged adjustable chokes, min. 1" full opening & equipped w/ hard trim.
- 4" x 2" flanged steel cross.
- 4" flanged steel tee.
- 4" flanged all steel valve (Type as in no. 1).
- Drilling Spool w/ 2" x 4" flanged outlet.
- Drilling Spool w/ 2" x 2" flanged outlet.
- 2" x 2" flanged steel cross.
- 4" pressure operated gate valve.
- 2" flanged steel tee.

Notes

Choke manifold may be located in any convenient position. Use all steel fittings throughout. Make 90° turns with bull plugged tees only. No field welding will be permitted on any of the components of the choke manifold and related equipment upstream of the chokes. The choke spool and all lines and fittings must be at least equivalent to the test pressure of the preventers required. Independent closing control unit with clearly marked controls to be located on derrick floor near driller's position.