


DEVON ENERGY CORPORATION (NEVADA) WELLBORE SCHEMATIC

WELL NAME: Mescalero Ridge Unit #35-10			FIELD: PEARL QUEEN			
LOCATION: 990 FSL, 660 FEL, SEC 35-T19S-R34E			COUNTY: LEA			STATE: NM
ELEVATION: 3713' KB			SPUD DATE: 3/4/65		COMP DATE: 12/28/83	
API#: 30-025-21265		PREPARED BY: W. M. Frank			DATE: 10/26/99	
	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0-235'	8 5/8	24#	H-40		11
CASING:	0-5175'	5 1/2	15.5#	J-55		7 7/8
CASING:						
TUBING:						
TUBING:						

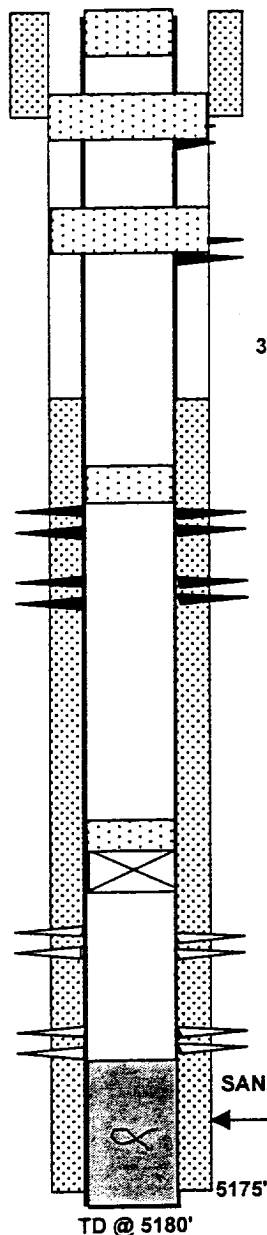

☐ CURRENT

☒ PROPOSED

10 sxs "C" cmt plug from 60' up.

235' 8-5/8", 24#, H-40 SURFACE CSG W/ 125 SX CMT TO SURFACE

25 sxs "C" cmt plug from 285' up, inside and out.

25 sxs "C" cmt plug from 1940' up, inside and out.

3740' 5-1/2" 15.5# J-55 PRODUCTION CSG W/ 350 SX CMT
TOC @ 3740' BY TEMP SURVEY

25 sxs "C" cmt plug from 3878' up.

PEARL SEVEN RIVERS PERFS 3878-3912'

PEARL SEVEN RIVERS PERFS 3983-93'

35' CEMENT PLUG, TOC @ 4509'
CEMENT RETAINER @ 4544'

QUEEN PERFS 4595-4619' SQUEEZED

QUEEN PERFS 4728-4976' SQUEEZED

SAND TO 4976'

JUNK REPORTED @ 5108'

TD @ 5180'

RECEIVED
OCT 29 1998
BLM
ROSWELL, NM