

Brewster N-7-2W

Compound, 2-engine, oil bath chain drive

ENGINES

Two 410-H.P. D353TA Caterpillar Diesel

Lee C. Moore, 127', 440,000 lb. nominal capacity.

Lee C. Moore, 10' high, 440,000 lb. nominal capacity.

Pump No. 1: Emco DB700, 700 H.P., with steel fluid end, 4½" × 7½" liners, 16" stroke, Compound-driven.

Pump No. 2: National C-250, powered by D353 Caterpillar diesel.

8400' 4½" Grade E, 16.60 lb

3000' - 4 1/2" Grade E, 20 lb.

Tool joints: 4" 11-90, 6" OD

Thirty Drilco spiral-grooved 6 1/2" OD, 2 1/2" ID, with 4" H-90 joints.

Other sized dullpipe & drillcollars available.

One Shafter LWS hydraulic double 10" x 900 series. One Hydrol 10" x 900 series.

Choke manifold 4" x 900 series flanged connections.

Payne 4 valve accumulator closing unit.


3. 30 x 7½ x 6 steel pits, with 700 Bbl. capacity. Complete low pressure circulating system, consisting of four submerged mud guns and two counter sunk jets in each pit. System utilizes a 6 x 8 centrifugal pump, powered by diesel.

Harvey E. Yates Company.

Young, Joseph B. Federal #2

Sec. 3, 7-183, R-32E

Lea County, New Mexico



One 8' x 30' Steel Storage House.

24-Hour direct telephone interconnection through Hobbs (A.C. 505-397-3291) or Midland - Odessa (A.C. 915-563-0562).

BLOCKS McKissick 350 Ton

HOOK 114 300-350 Ton

SWIVEL NAT N47 200 Ton


LIGHT PLANTS Two 15 KW AC generators, powered by diesel engines.

LIGHTS AC fluorescent or mercury —
All vapor proof.

SHALL SHAKER Link belt, single screen.

FRESH WATER STORAGE two 500 BBL.
Horizontal tanks.

HOUSING: 1 - 8' x 36' airconditioned trailer house, with sleeping and cooking facilities.

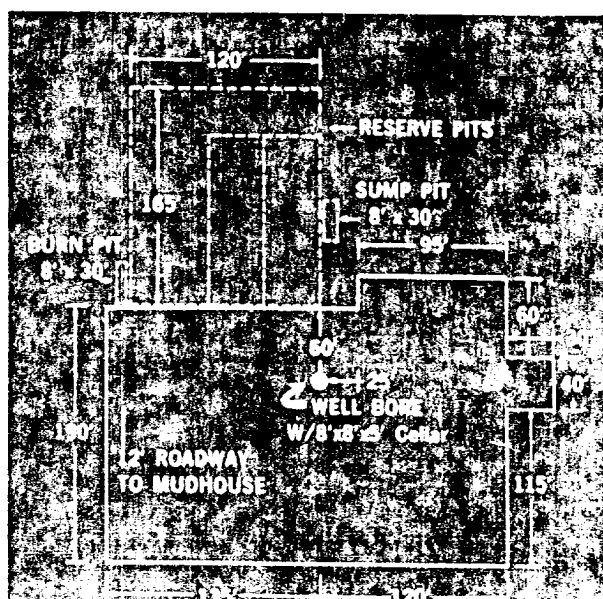

RECEIVED

SEP 11 1984

O.C.
HOBBS OFFICE

SEP 11 1984
HOBBS OFFICE