

DISTRICT I

P.O. Box 1980, Hobbs, NM 88240

DISTRICT II

P.O. Box Drawer DD, Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.	30-025-31841
5. Indicate Type of Lease	STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil / Gas Lease No.	B-155-6
7. Lease Name or Unit Agreement Name	VACUUM GLORIETA WEST UNIT
8. Well No.	94
9. Pool Name or Wildcat	VACUUM GLORIETA
10. Elevation (Show whether DF, RKB, RT, GR, etc.)	3994' GR

SUNDRY NOTICES AND REPORTS ON WELL
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:	OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER INJECTION <input type="checkbox"/>
2. Name of Operator	TEXACO EXPLORATION & PRODUCTION INC.
3. Address of Operator	205 E. Bender, HOBBS, NM 88240
4. Well Location	Unit Letter <u>J</u> : <u>1525</u> Feet From The <u>SOUTH</u> Line and <u>2591</u> Feet From The <u>EAST</u> Line Section <u>36</u> Township <u>17S</u> Range <u>34E</u> NMPM <u>LEA</u> COUNTY

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
 PULL OR ALTER CASING ☐
 OTHER: ☐

SUBSEQUENT REPORT OF:

- REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPERATION ☐ PLUG AND ABANDONMENT ☐
 CASING TEST AND CEMENT JOB ☐
 OTHER: ☒ SQZD PERFS, ADDED NEW PERFS & ACIDIZED

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

5/2/97 - 5/15/97

- MIRU. RELEASED INJ PKR @ 5818' & TOH W/ INJ EQUIP.
- SET CEMENT RETAINER @ 5785'. SQUEEZED PERFS FROM 5885'-6128' W/ 260 SACKS CLASS H CEMENT. DRILLED OUT CEMENT RETAINER @ 5785' & CEMENT TO 6050', LOST CIRCULATION.
- SET CEMENT RETAINER @ 5792'. RESQUEEZED PERFS W/ 400 SACKS CLASS H CEMENT. DRILLED OUT CEMENT RETAINER @ 5792' & CEMENT TO 6050'. PERFORMED UNSUCCESSFUL CASING TEST. SPOTTED 75 SACKS CLASS H CEMENT. DRILLED OUT CEMENT FROM 5492' - 6050'. TESTED CASING TO 300#, HELD OK.
- PERFORATED W/ 2 JSPF FROM 5920'-5960' & 6012'-6025'.
- TIH W/ TREATING PKR & SET @ 5785'. ACIDIZED NEW PERFS W/ 5800 GALS 15% NEFE. MAX P = 1200#, AIR = 4 BPM.
- TOH W/ PKR. TIH W/ INJ EQUIPMENT. CIRC HOLE W/ PKR FLUID, SET PKR @ 5804'. TESTED CASING FROM SURFACE TO PKR SET @ 5804' AS PER NMOCD GUIDELINE TO 500# FOR 30 MIN, HELD OK. (ORIGINAL CHART ATTACHED, COPY OF CHART ON BACK)
- RETURNED WELL TO INJECTION.

OPT 6/5/97 INJECTING 2007 BWPD @ 64 PSI
(INTERNAL TEPI STATUS REMAINS INJ)

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Monte C. Duncan TITLE Engr Asst DATE 7/7/97

TYPE OR PRINT NAME Monte C. Duncan Telephone No. 397-0418

(This space for State Use) APPROVED BY CHIEF'S WILLIAMS


APPROVED BY DISTRICT SUPERVISOR TITLE DATE

CONDITIONS OF APPROVAL, IF ANY:

PRINTED IN U.S.A. 9

DAY ↑

NIGHT ↓

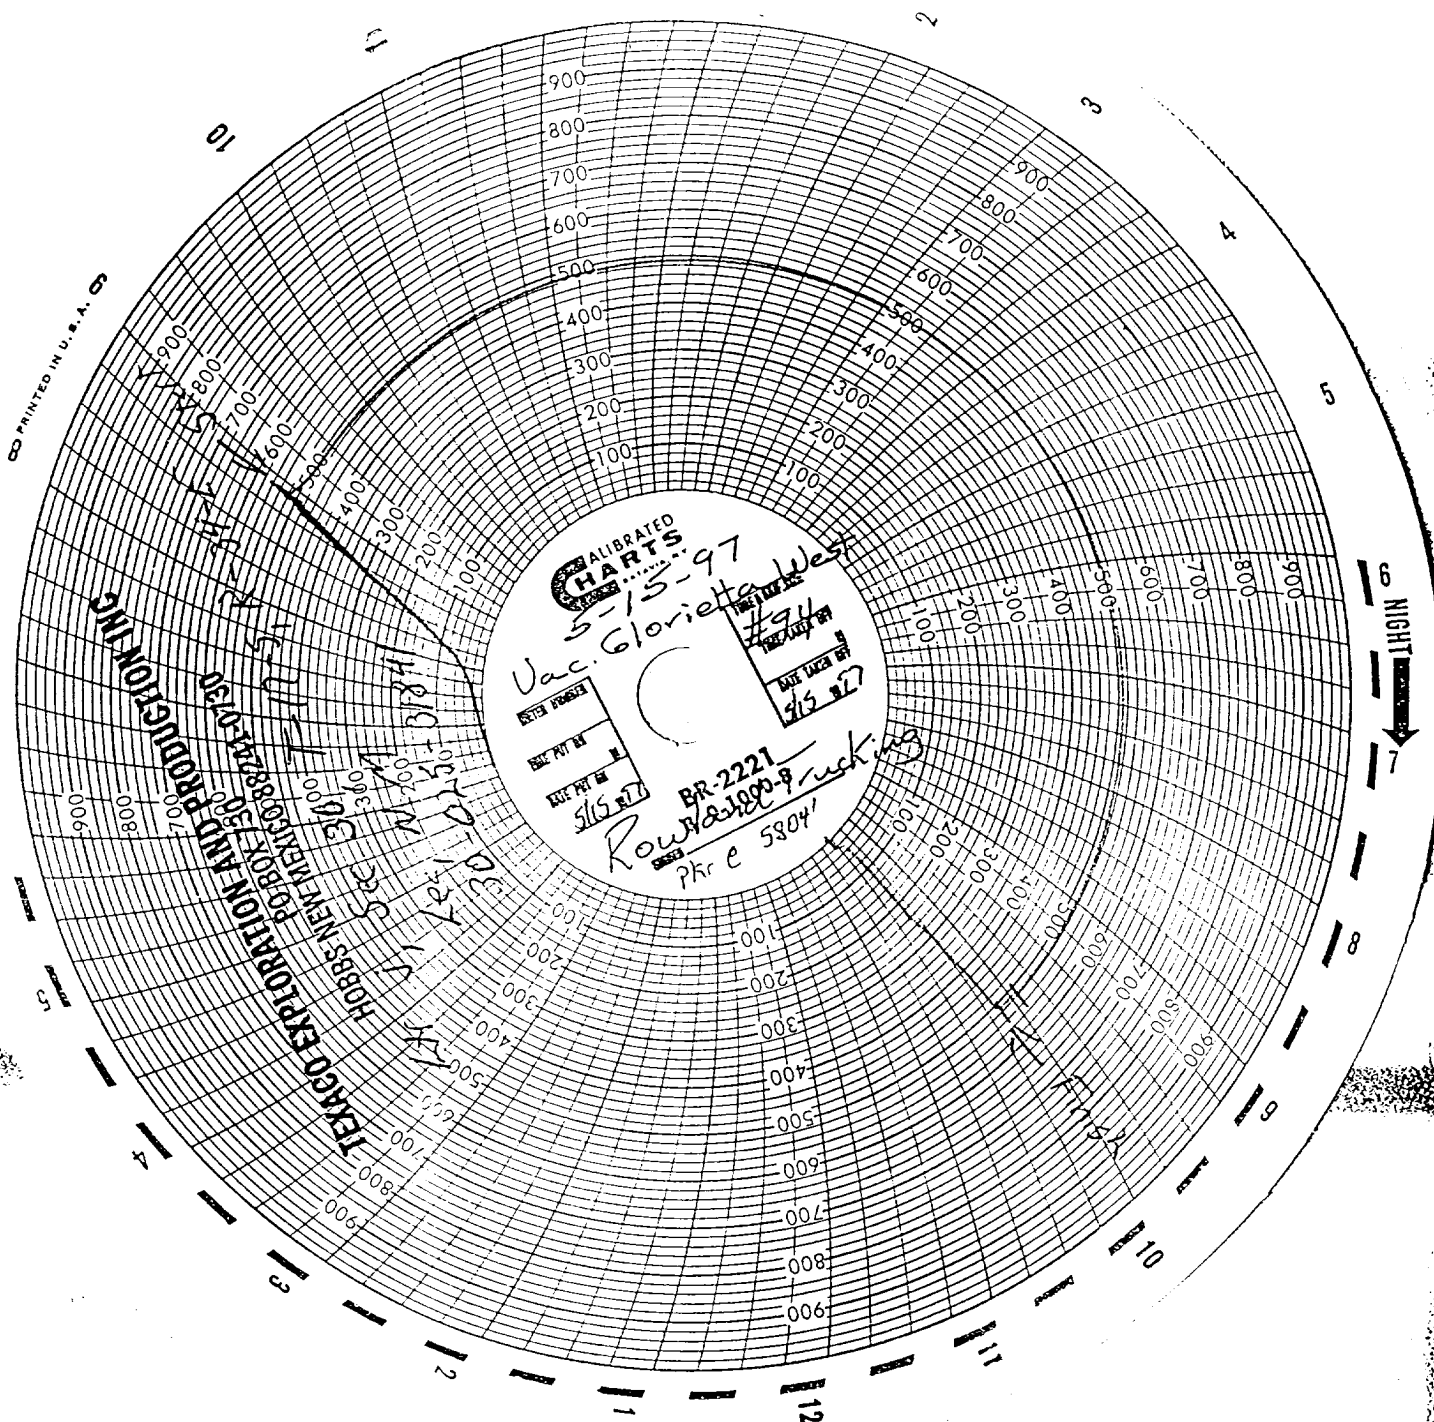

CALIBRATED
CHARTS

5-15-97

Vac. Glorieta West

DATE PLOT

DATE PLOT

DATE PLOT

BR-2221

Rowland Trucking

Phr e 5304'

TEGGO EXPLORATION AND PRODUCTION INC
HOBBS-NEW MEXICO 88204-0730