


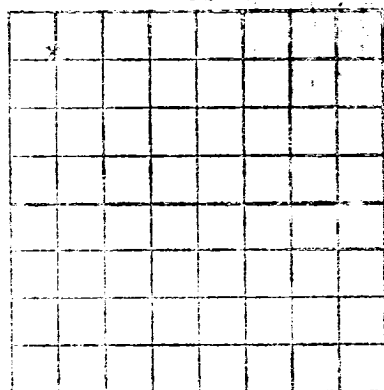

NEW MEXICO OIL CONSERVATION COMMISSION

SANTA FE, NEW MEXICO

WELL RECORD

MAIL TO DISTRICT OFFICE, OIL CONSERVATION COMMISSION, TO WHICH FORM C-101 WAS SENT NOT LATER THAN TWENTY DAYS AFTER COMPLETION OF WELL. FOLLOW INSTRUCTIONS IN RULES AND REGULATIONS OF THE COMMISSION. SUBMIT IN QUINTUPPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Oilfield Oil Refining Company, N. M. State AG
(COMPANY OR OPERATOR) (LEASE)

WELL NO. 4, IN NW 1/4 OF NW 1/4 OF SEC. 1, T. 20-S, R. 37-E, N.M.

Summit, POOL, Lea, COURT

WELL IS 660 FEET FROM north LINE AND 660 FEET FROM west

OF SECTION 1 IF STATE LAND THE OIL AND GAS LEASE NO. IS B-935

DRILLING COMMENCED 8-8-56 19 DRILLING WAS COMPLETED 2-8-56 19

NAME OF DRILLING CONTRACTOR Gackle Drilling Company

ADDRESS Box 2076, Hobbs, N.M.

ELEVATION ABOVE SEA LEVEL AT TOP OF TUBING HEAD 7643 DP THE INFORMATION GIVEN IS TO

BE KEPT CONFIDENTIAL UNTIL not confidential 19

OIL SANDS OR ZONES

NO. 1, FROM 3818 TO 3888 NO. 4, FROM TO

NO. 2, FROM TO NO. 5, FROM TO

NO. 3, FROM TO NO. 6, FROM TO

IMPORTANT WATER SANDS

INCLUDE DATA ON RATE OF WATER INFLOW AND ELEVATION TO WHICH WATER ROSE IN HOLE

NO. 1, FROM TO FEET

NO. 2, FROM TO FEET

NO. 3, FROM TO FEET

NO. 4, FROM TO FEET

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF	CUT AND RILLED FROM	PERFORATION	REMARKS
8-5/8	21	new	575.33	Heavy	-	-	Surface
5-1/2	11	new	3937.00	Heavy	-	3818 - 3888	oil

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
8-5/8	5-1/2	508	275	5	-	-
8-5/8	5-1/2	3937	1300	10	-	-

RECORD OF PRODUCTION AND STIMULATION

(RECORD THE PROCESS USED, NO. OF QTS OR GALS. USED, INTERNAL TREATED OR SHOT.)

Frased perforations from 3818 to 3888 with 10.0 gal 15% acid, swab 15 hrs, recovered

51 bbls load oil. Frased through perforation from 3818 to 3888 with 10,000 gal water

oil and 10,000 gal sand. breakdown pressure 34.7

RESULT OF PRODUCTION STIMULATION On 6-hour test well produced 107 gals liquid per

6 gals water on 18/64" choke.

DEPTH CEMENTED ONLY