


Form 9-331  
Nov. 1980  
P. O. Box 1980  
HOBBS, NEW MEXICO 88240

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

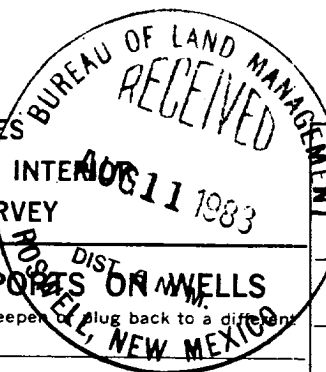

Form Approved.  
Budget Bureau No. 42-R1424

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☒ gas well ☐ other ☐
2. NAME OF OPERATOR  
CONOCO INC.
3. ADDRESS OF OPERATOR  
P. O. Box 460, Hobbs, N.M. 88240
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1980' FSL + 660' FWL  
AT TOP PROD. INTERVAL: ✓  
AT TOTAL DEPTH: ✓

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

- ☐  
☐  
☒  
☐  
☐  
☐  
☐  
☐  
☐

5. LEASE

LC - 031621 (A)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

NMFU

8. FARM OR LEASE NAME

BRITT A-6

9. WELL NO.

2

10. FIELD OR WILDCAT NAME

EUNICE MONUMENT G/SA

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

SEC. 6, T-20S, R-37E

12. COUNTY OR PARISH

LEA

13. STATE

NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

(NOTE: Report results of multiple completion or zone charge on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

MIRU ON 5/28/83. SPOTTED 6 BBLs 15% HCL-NE-FE @ 3670'. PERF W/ 2 JSPF @ 3452'-69', 3492'-98', 3540'-52', 3575'-94', 3600'-07', 3637'-41', 3650'-55', 3668'-3675' (TOTAL 161 HOLES). SET PKR @ 3367'. ACIDIZED 3452'-3675' W/ 154 BBLs 15% HCL-NE-FE, 300 LBS ROCKSALT W/ GELLED BRINE. SWABBED. INHIBIT W/ 2 DRUMS CHEMICAL MIXED IN 22 BBLs TFW. FLUSHED W/ 116 BBLs TFW. REL PKR. RAN PRODUCTION EQUIPMENT. PUMPED 8 BO, 123 BW, + 15 MCF IN 24 HOURS ON 7/20/83.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED W. A. Butterfield TITLE Administrative Supervisor DATE 8/9/83

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

SEP - 9 1983

\*See Instructions on Reverse Side