


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

DUPLICATE
NOTICE OF INTENTION TO DRILL OR RECOMPLETION

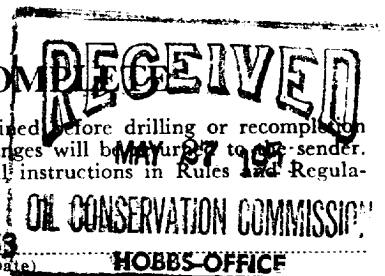

Notice must be given to the District Office of the Oil Conservation Commission and approval obtained before drilling or recompletion begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in QUINTUPPLICATE. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

(Place)

May 26, 1953

(Date)

HOBBS OFFICE

OIL CONSERVATION COMMISSION
SANTA FE, NEW MEXICO

Gentlemen:

You are hereby notified that it is our intention to commence the (Drilling) (Recompletion) of a well to be known as

Stanolind Oil and Gas Company

(Company or Operator)

State A Tract 4

(Lease)

, Well No. 8, in L (Unit) The well is

located 1980 feet from the South line and 660 feet from the

est line of Section 5, T. 19-S, R. 38-E, NMPM.

(GIVE LOCATION FROM SECTION LINE) Hobbs Pool, Lea County

If State Land the Oil and Gas Lease is No. A-1212

If patented land the owner is

Address

We propose to drill well with drilling equipment as follows: Rotary tools to total

depth

The status of plugging bond is Blanket bond on file with Commission

Drilling Contractor Hargley Drilling Company

Midland, Texas

We intend to complete this well in the San Andres

formation at an approximate depth of 4300 feet.

CASING PROGRAM

We propose to use the following strings of Casing and to cement them as indicated:

| Size of Hole | Size of Casing | Weight per Foot | New or Second Hand | Depth | Sacks Cement |
|--------------|----------------|-----------------|--------------------|-------|-------------------|
| 11" | 8-5/8" | | | 300' | 140 sx circulated |
| 7-7/8" | 5-1/2" | | | 4300' | * |

If changes in the above plans become advisable we will notify you immediately.

ADDITIONAL INFORMATION (If recompletion give full details of proposed plan of work.)

* Two stage with D. V. tool set at 1630' at top of salt section. 1st stage 105
sxs cement with 4% gel plus 105 cu. ft. perlite followed with 110 sx neat cement.
2nd stage: 100 sacks neat cement.

Approved MAY 27 1953, 19.

Except as follows:

Sincerely yours,

Stanolind Oil and Gas Company

(Company or Operator)

By

Position Field Superintendent

Send Communications regarding well to

Name R. L. Hendrickson

Address Box 68, Hobbs, New Mexico

OIL CONSERVATION COMMISSION

By

Title