

COPY TO O. C. C.

Form 9-331
Dec. 1973Form Approved.
Budget Bureau No. 42-R1424UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other2. NAME OF OPERATOR
Amoco Production Company3. ADDRESS OF OPERATOR
P. O. Box 68, Hobbs, NM 88240

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 2200' FNL X 660' FEL, Sec. 24
AT TOP PROD. INTERVAL: (Unit H, SE/4 NE/4)
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☒
☐
☐
☐
☐
☐
☐
☐
☐

RECEIVED

SEP 23 1979

Report results of multiple completion or zone change on Form 9-330.)

U. S. GEOLOGICAL SURVEY
HOBBS, NEW MEXICO

5. LEASE

LC-031736-a

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

CA-4659

8. FARM OR LEASE NAME

Gillully Federal Gas Com.

9. WELL NO.

17

10. FIELD OR WILDCAT NAME

Eumont Queen

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

24-20-36

12. COUNTY OR PARISH

Lea

13. STATE

NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3540.4 GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

On 9-19-79 Cactus Drilling Co. (Rig #63) spudded a 12-1/4" hole at 4:30 a.m.

Drilled to a TD of 1035' and ran 8-5/8" 24# casing set at 1035'. Cement with 325 S)

Class C cement with additives and 100 SX Class C cement with additives. Plug

down 10:15 a.m. 9-20-79. Circulated 50 SX. WOC 18 hrs. Test casing with

1000# for 30 min. OK. Reduced hole to 7-7/8" and resumed drilling.

Subsurface Safety Valve: Manu. and Type

Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Bob Davis

TITLE Asst. Admin. Analyst


DATE 9-28-79

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

0+4-USGS, H 1-Hou 1-Susp 1-BD 1-Arc

*See Instructions on Reverse

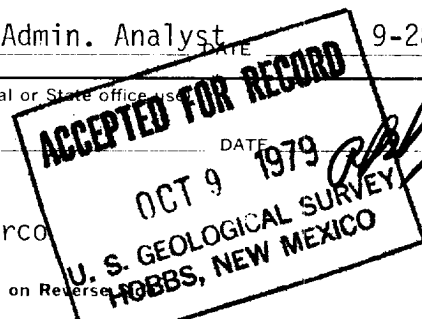

RECEIVED
OCT 16 1971
O.C.D. HOBBS, OFFICE