

DISTRICT I

P.O. Box 1980, Hobbs, NM 88240

DISTRICT II

P.O. Box Drawer DD, Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

WELL API NO	30 025 34528
5. Indicate Type of Lease	STATE ☒ FEE
6. State Oil / Gas Lease	
7. Lease Name or Unit Agreement Name	VAN ETEN L.
8. Well No.	19
9. Pool Name or Wildcat	MONUMENT SOUTHEAST ABO

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well: OIL WELL ☒ GAS WELL DRY OTHER	7. Lease Name or Unit Agreement Name VAN ETEN L.
b. Type of Completion: NEW WELL WORKOVER DEEPEN PLUG BACK DIFF RES. OTHER HORIZONTAL	8. Well No. 19
2. Name of Operator TEXACO EXPLORATION & PRODUCTION INC.	9. Pool Name or Wildcat MONUMENT SOUTHEAST ABO
3. Address of Operator PO BOX 3109, MIDLAND, TX 79702	
4. Well Location BHL 324 FSL, 668 FEL Unit Letter O 467 Feet From The SOUTH Line and 1650 Feet From The EAST Line Section 9 Township 20S Range 37E NMPM LEA COUNTY	
10. Date Spudded 9/17/01	11. Date T.D. Reached 9/24/01
12. Date Compl. (Ready to Prod.) 10/4/01	13. Elevations (DF & RKB, RT, GR, etc.) 3544 GL
14. Elev. Csghead	
15. Total Depth 8141'	16. Plug Back T.D. 7297'
17. If Mult. Compl. How Many Zones?	18. Intervals Drilled By Rotary Tools Key Cable Tools
19. Producing Interval(s), of this completion - Top, Bottom, Name 7007-7013' MONUMENT ABO	20. Was Directional Survey Made YES
21. Type Electric and Other Logs Run N/A	22. Was Well Cored NO

CASING RECORD (Report all Strings set in well)

CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENT RECORD	AMOUNT PULLED
8-5/8"	24#	1153'	11"	450 SX, CIRC.	
5-1/2"	15.5#LS65	1125'	7-7/8"		
5-1/2"	15.5#K55	7500'	7-7/8"	1320 SX, CIRC.	

SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET	PACKER SET
					2-7/8"	7052'	

26. Perforation record (interval, size, and number)
7007-7013' ABO. 5158-5216 PADDOCK. 5528-5686 BLINBRY.
6256-6498 TUBB. 6788-6812 DRINKARD

27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.
DEPTH INTERVAL AMOUNT AND KIND MATERIAL USED
7007-7013' ACIDIZE W/17,500 GALS 15% HCL MSR
25,714 GALS 20% HCL
15,000 GALS WF130

PRODUCTION

Date First Production 10/17/01	Production Method (Flowing, gas lift, pumping - size and type pump) PUMPING 2 1/2X1 1/2Z24'	Well Status (Prod. or Shut-in) PRODUCING					
Date of Test 10-22-01	Hours tested 24	Choke Size	Prod'n For Test Period	Oil - Bbl. 58	Gas - MCF 179	Water - Bbl. 44	Gas - Oil Ratio
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)
SOLD

Test Witnessed By

30. List Attachments
NOTARIZED DEVIATIONS

31. I hereby certify that the information on both sides of this form is true and complete to the best of my knowledge and belief.

SIGNATURE *J. Denise Leake* TITLE Engineering Assistant
TYPE OR PRINT NAME J. Denise Leake

DATE: 10/25/01

Telephone No. 915-688-4752

Scientific Drilling Intl. Survey Report

Company: ChevronTexaco		Date: 10/25/2001		Time: 15:11:06		Page: 1				
Field: Southeast Monument Abo		Co-ordinate(NE) Reference:		Site: Lea County, New Mexico, True North						
Site: Lea County, New Mexico		Vertical (TVD) Reference:		SITE 0.0						
Well: Van Etten #19H		Section (VS) Reference:		Site (0.00N,0.00E,97.88Azi)						
Wellpath: 1		Survey Calculation Method:		Minimum Curvature Db: Sybase						
Field: Southeast Monument Abo										
Map System: US State Plane Coordinate System 1927				Map Zone: New Mexico, Eastern Zone						
Geo Datum: NAD27 (Clarke 1866)				Coordinate System: Site Centre						
Sys Datum: Mean Sea Level				Geomagnetic Model: igrf2000						
Site: Lea County, New Mexico										
Site Position:		Northing: 577014.91 ft		Latitude: 32 34 54.040 N						
From: Geographic		Easting: 832696.50 ft		Longitude: 103 15 11.712 W						
Position Uncertainty: 0.0 ft				North Reference: True						
Ground Level: 0.0 ft				Grid Convergence: 0.58 deg						
Well: Van Etten #19H Slot Name:										
Well Position: +N/-S 0.0 ft		Northing: 577014.91 ft		Latitude: 32 34 54.040 N						
+E/-W 0.0 ft		Easting: 832696.50 ft		Longitude: 103 15 11.712 W						
Position Uncertainty: 0.0 ft										
Wellpath: 1										
Current Datum: SITE		Height 0.0 ft		Drilled From: Surface						
Magnetic Data: 4/19/2001				Tie-on Depth: 0.0 ft						
Field Strength: 49995 nT				Above System Datum: Mean Sea Level						
Vertical Section: Depth From (TVD)		+N/-S ft		Declination: 8.69 deg						
				Mag Dip Angle: 60.85 deg						
				+E/-W ft		Direction deg				
7300.0		0.0		0.0		97.88				
Survey: Survey #1				Start Date: 9/19/2001						
Company: SDI				Engineer: Matt Manulik						
Tool: Gyro,				Tied-to: From Surface						
Survey: Survey #1										
MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	Gyro
100.0	0.28	113.64	100.0	-0.1	0.2	0.2	0.28	0.28	0.00	Gyro
200.0	0.33	94.36	200.0	-0.2	0.7	0.8	0.11	0.05	-19.28	Gyro
300.0	0.15	78.86	300.0	-0.2	1.2	1.2	0.19	-0.18	-15.50	Gyro
400.0	0.22	44.76	400.0	-0.1	1.4	1.4	0.13	0.07	-34.10	Gyro
500.0	0.15	315.64	500.0	0.2	1.5	1.4	0.26	-0.07	-89.12	Gyro
600.0	0.29	340.44	600.0	0.5	1.3	1.2	0.17	0.14	24.80	Gyro
700.0	0.26	312.79	700.0	0.9	1.0	0.9	0.13	-0.03	-27.65	Gyro
800.0	0.25	261.54	800.0	1.0	0.6	0.5	0.22	-0.01	-51.25	Gyro
900.0	0.35	220.86	900.0	0.8	0.2	0.1	0.23	0.10	-40.68	Gyro
1000.0	0.39	206.21	1000.0	0.2	-0.1	-0.1	0.10	0.04	-14.65	Gyro
1100.0	0.38	211.26	1100.0	-0.4	-0.4	-0.4	0.04	-0.01	5.05	Gyro
1200.0	0.45	219.17	1200.0	-1.0	-0.9	-0.7	0.09	0.07	7.91	Gyro
1300.0	0.64	226.49	1300.0	-1.6	-1.5	-1.3	0.20	0.19	7.32	Gyro
1400.0	0.56	229.15	1400.0	-2.3	-2.3	-1.9	0.08	-0.08	2.66	Gyro
1500.0	0.64	225.96	1500.0	-3.1	-3.1	-2.6	0.09	0.08	-3.19	Gyro
1600.0	0.70	230.54	1600.0	-3.8	-3.9	-3.4	0.08	0.06	4.58	Gyro
1700.0	0.61	226.52	1700.0	-4.6	-4.8	-4.1	0.10	-0.09	-4.02	Gyro
1800.0	0.59	228.15	1800.0	-5.3	-5.6	-4.8	0.03	-0.02	1.63	Gyro
1900.0	0.11	128.16	1899.9	-5.7	-5.9	-5.0	0.62	-0.48	-99.99	Gyro
2000.0	0.10	129.28	1999.9	-5.8	-5.7	-4.9	0.01	-0.01	1.12	Gyro
2100.0	0.48	61.62	2099.9	-5.7	-5.3	-4.5	0.45	0.38	-67.66	Gyro
2200.0	0.56	60.25	2199.9	-5.2	-4.5	-3.7	0.08	0.08	-1.37	Gyro
2300.0	0.57	60.63	2299.9	-4.7	-3.6	-3.0	0.01	0.01	0.38	Gyro



Scientific Drilling Intl. Survey Report

ChevronTexaco

Company: ChevronTexaco
Field: Southeast Monument Abo
Site: Lea County, New Mexico
Well: Van Etten #19H
Wellpath: 1

Date: 10/25/2001 Time: 15:11:06 Page: 2
Co-ordinate(NE) Reference: Site: Lea County, New Mexico, True North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Site (0.00N,0.00E,97.88Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey: Survey #1

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
2400.0	0.39	62.18	2399.9	-4.3	-2.9	-2.3	0.18	-0.18	1.55	Gyro
2500.0	0.32	56.93	2499.9	-4.0	-2.4	-1.8	0.08	-0.07	-5.25	Gyro
2600.0	0.05	8.04	2599.9	-3.8	-2.1	-1.6	0.29	-0.27	-48.89	Gyro
2700.0	0.27	228.60	2699.9	-3.9	-2.3	-1.7	0.31	0.22	-139.44	Gyro
2800.0	0.58	226.87	2799.9	-4.4	-2.8	-2.2	0.31	0.31	-1.73	Gyro
2900.0	0.63	220.35	2899.9	-5.2	-3.6	-2.8	0.09	0.05	-6.52	Gyro
3000.0	0.71	227.09	2999.9	-6.1	-4.4	-3.5	0.11	0.08	6.74	Gyro
3100.0	0.93	228.64	3099.9	-7.0	-5.4	-4.4	0.22	0.22	1.55	Gyro
3200.0	1.06	226.28	3199.9	-8.2	-6.7	-5.5	0.14	0.13	-2.36	Gyro
3300.0	1.08	225.37	3299.9	-9.5	-8.1	-6.7	0.03	0.02	-0.91	Gyro
3400.0	1.12	223.46	3399.9	-10.9	-9.4	-7.8	0.05	0.04	-1.91	Gyro
3500.0	1.16	221.30	3499.8	-12.3	-10.7	-9.0	0.06	0.04	-2.16	Gyro
3600.0	1.32	219.19	3599.8	-14.0	-12.1	-10.1	0.17	0.16	-2.11	Gyro
3700.0	1.40	218.37	3699.8	-15.8	-13.6	-11.3	0.08	0.08	-0.82	Gyro
3800.0	1.57	212.16	3799.8	-17.9	-15.1	-12.5	0.23	0.17	-6.21	Gyro
3900.0	1.90	207.31	3899.7	-20.6	-16.6	-13.6	0.36	0.33	-4.85	Gyro
4000.0	2.18	209.04	3999.6	-23.7	-18.3	-14.9	0.29	0.28	1.73	Gyro
4100.0	2.31	209.22	4099.6	-27.1	-20.2	-16.3	0.13	0.13	0.18	Gyro
4200.0	2.38	210.83	4199.5	-30.7	-22.2	-17.8	0.10	0.07	1.61	Gyro
4300.0	2.58	213.24	4299.4	-34.3	-24.5	-19.6	0.23	0.20	2.41	Gyro
4400.0	2.56	212.67	4399.3	-38.1	-27.0	-21.5	0.03	-0.02	-0.57	Gyro
4500.0	2.58	211.72	4499.2	-41.9	-29.4	-23.3	0.05	0.02	-0.95	Gyro
4600.0	2.34	212.30	4599.1	-45.5	-31.6	-25.1	0.24	-0.24	0.58	Gyro
4700.0	1.89	213.68	4699.0	-48.6	-33.6	-26.7	0.45	-0.45	1.38	Gyro
4800.0	1.66	211.79	4799.0	-51.2	-35.3	-28.0	0.24	-0.23	-1.89	Gyro
4900.0	1.69	210.07	4898.9	-53.8	-36.8	-29.1	0.06	0.03	-1.72	Gyro
5000.0	1.40	213.19	4998.9	-56.0	-38.2	-30.2	0.30	-0.29	3.12	Gyro
5100.0	0.57	218.55	5098.9	-57.5	-39.2	-31.0	0.83	-0.83	5.36	Gyro
5200.0	0.33	229.81	5198.9	-58.0	-39.7	-31.4	0.25	-0.24	11.26	Gyro
5300.0	0.44	266.99	5298.9	-58.2	-40.3	-32.0	0.27	0.11	37.18	Gyro
5400.0	0.51	283.66	5398.9	-58.2	-41.2	-32.8	0.15	0.07	16.67	Gyro
5500.0	0.41	283.97	5498.9	-58.0	-41.9	-33.6	0.10	-0.10	0.31	Gyro
5600.0	0.35	279.20	5598.9	-57.8	-42.6	-34.3	0.07	-0.06	-4.77	Gyro
5700.0	0.25	261.34	5698.9	-57.8	-43.1	-34.8	0.14	-0.10	-17.86	Gyro
5800.0	0.22	274.94	5798.9	-57.8	-43.5	-35.2	0.06	-0.03	13.60	Gyro
5900.0	0.14	323.01	5898.9	-57.7	-43.8	-35.5	0.16	-0.08	48.07	Gyro
6000.0	0.16	338.57	5998.9	-57.5	-43.9	-35.6	0.05	0.02	15.56	Gyro
6100.0	0.57	348.44	6098.9	-56.9	-44.1	-35.8	0.41	0.41	9.87	Gyro
6200.0	0.60	351.01	6198.9	-55.9	-44.2	-36.2	0.04	0.03	2.57	Gyro
6300.0	0.61	351.76	6298.9	-54.8	-44.4	-36.5	0.01	0.01	0.75	Gyro
6400.0	0.37	5.58	6398.8	-54.0	-44.4	-36.6	0.27	-0.24	13.82	Gyro
6500.0	0.45	5.75	6498.8	-53.3	-44.4	-36.6	0.08	0.08	0.17	Gyro
6600.0	0.24	345.18	6598.8	-52.7	-44.4	-36.7	0.24	-0.21	-20.57	Gyro
6700.0	0.24	317.47	6698.8	-52.3	-44.6	-37.0	0.11	0.00	-27.71	Gyro
6800.0	0.24	296.87	6798.8	-52.1	-44.9	-37.3	0.09	0.00	-20.60	Gyro
6900.0	0.18	274.13	6898.8	-52.0	-45.2	-37.7	0.10	-0.06	-22.74	Gyro
6975.0	0.43	221.89	6973.8	-52.2	-45.6	-38.0	0.47	0.33	-69.65	Gyro



Scientific Drilling Intl. Survey Report

ChevronTexaco

Company: ChevronTexaco	Date: 10/25/2001	Time: 15:10:37	Page: 1
Field: Southeast Monument Abo	Co-ordinate(NE) Reference: Site: Lea County, New Mexico, True North		
Site: Lea County, New Mexico	Vertical (TVD) Reference: SITE 0.0		
Well: Van Etten #19H	Section (VS) Reference: Site (0.00N,0.00E,97.88Az)		
Wellpath: 1	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Field: Southeast Monument Abo**Map System:** US State Plane Coordinate System 1927
Geo Datum: NAD27 (Clarke 1866)
Sys Datum: Mean Sea Level**Map Zone:** New Mexico, Eastern Zone
Coordinate System: Site Centre
Geomagnetic Model: igrf2000**Site:** Lea County, New Mexico

Site Position:	Northing: 577014.91 ft	Latitude: 32 34 54.040 N
From: Geographic	Easting: 832696.50 ft	Longitude: 103 15 11.712 W
Position Uncertainty: 0.0 ft		North Reference: True
Ground Level: 0.0 ft		Grid Convergence: 0.58 deg

Well: Van Etten #19H**Slot Name:**

Well Position: +N/-S 0.0 ft	Northing: 577014.91 ft	Latitude: 32 34 54.040 N
+E/-W 0.0 ft	Easting: 832696.50 ft	Longitude: 103 15 11.712 W
Position Uncertainty: 0.0 ft		

Wellpath: 1

Current Datum: SITE	Height 0.0 ft	Drilled From: Surface
Magnetic Data: 4/19/2001		Tie-on Depth: 0.0 ft
Field Strength: 49995 nT		Above System Datum: Mean Sea Level
Vertical Section: Depth From (TVD) ft	+N/-S ft	Declination: 8.69 deg
		Mag Dip Angle: 60.85 deg
		+E/-W ft
		Direction deg
7300.0	0.0	0.0 97.88

Survey: Survey #2**Start Date:** 9/26/2001**Company:** SDI
Tool: Magnetic Steering,**Engineer:** Matt Manulik
Tied-to: From: Definitive Path**Survey:** Survey #2

MD ft	Incl deg	Azlm deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
6975.0	0.43	221.89	6973.8	-52.2	-45.6	-38.0	0.00	0.00	0.00	Magnetic Steering
7010.0	0.43	221.89	7008.8	-52.4	-45.7	-38.1	0.00	0.00	0.00	Magnetic Steering
7068.0	25.40	97.90	7065.0	-54.3	-33.3	-25.6	44.21	43.05	-213.78	Magnetic Steering
7100.0	38.70	98.80	7092.0	-56.7	-16.6	-8.7	41.59	41.56	2.81	Magnetic Steering
7132.0	51.40	100.80	7114.6	-60.6	5.7	13.9	39.93	39.69	6.25	Magnetic Steering
7164.0	64.60	100.10	7131.5	-65.5	32.3	41.0	41.29	41.25	-2.19	Magnetic Steering
7193.0	76.50	99.10	7141.2	-70.1	59.2	68.3	41.16	41.03	-3.45	Magnetic Steering
7225.0	83.20	95.40	7146.8	-74.0	90.4	99.7	23.83	20.94	-11.56	Magnetic Steering
7256.0	83.60	93.70	7150.4	-76.5	121.1	130.5	5.60	1.29	-5.48	Magnetic Steering
7287.0	83.60	94.20	7153.8	-78.6	151.9	161.2	1.60	0.00	1.61	Magnetic Steering
7319.0	84.10	94.90	7157.2	-81.1	183.6	193.0	2.68	1.56	2.19	Magnetic Steering
7350.0	81.10	95.50	7161.2	-83.9	214.2	223.7	9.87	-9.68	1.94	Magnetic Steering
7382.0	81.00	95.70	7166.2	-87.0	245.7	255.3	0.69	-0.31	0.62	Magnetic Steering
7413.0	77.30	94.50	7172.1	-89.7	276.0	285.7	12.53	-11.94	-3.87	Magnetic Steering
7444.0	77.70	94.60	7178.8	-92.1	306.1	315.9	1.33	1.29	0.32	Magnetic Steering
7475.0	77.80	95.00	7185.3	-94.6	336.3	346.1	1.30	0.32	1.29	Magnetic Steering
7507.0	80.10	93.90	7191.5	-97.1	367.6	377.5	7.94	7.19	-3.44	Magnetic Steering
7538.0	80.90	94.10	7196.6	-99.2	398.1	408.0	2.66	2.58	0.65	Magnetic Steering
7568.0	82.00	94.80	7201.0	-101.5	427.7	437.6	4.33	3.67	2.33	Magnetic Steering
7600.0	82.60	94.60	7205.3	-104.1	459.3	469.3	1.97	1.87	-0.62	Magnetic Steering
7632.0	80.90	93.90	7209.9	-106.5	490.9	500.9	5.74	-5.31	-2.19	Magnetic Steering
7663.0	81.20	94.40	7214.7	-108.7	521.4	531.4	1.86	0.97	1.61	Magnetic Steering
7695.0	79.20	92.00	7220.2	-110.4	552.9	562.8	9.68	-6.25	-7.50	Magnetic Steering
7727.0	79.70	93.00	7226.1	-111.8	584.4	594.2	3.45	1.56	3.12	Magnetic Steering



Scientific Drilling Intl. Survey Report

ChevronTexaco

Company: ChevronTexaco
Field: Southeast Monument Abo
Site: Lea County, New Mexico
Well: Van Eiten #19H
Wellpath: 1

Date: 10/25/2001 Time: 15:10:37 Page: 2
Co-ordinate(NE) Reference: Site: Lea County, New Mexico, True North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Site (0.00N,0.00E,97.88Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey: Survey #2

MD ft	Incl deg	Azimuth deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
7759.0	79.00	92.00	7232.0	-113.2	615.8	625.5	3.77	-2.19	-3.12	Magnetic Steering
7789.0	78.50	92.00	7237.8	-114.2	645.2	654.7	1.67	-1.67	0.00	Magnetic Steering
7821.0	78.50	90.30	7244.2	-114.8	676.5	685.9	5.21	0.00	-5.31	Magnetic Steering
7853.0	78.70	91.70	7250.5	-115.4	707.9	717.0	4.33	0.62	4.37	Magnetic Steering
7884.0	78.90	94.60	7256.6	-117.1	738.3	747.3	9.20	0.65	9.35	Magnetic Steering
7915.0	78.20	96.50	7262.7	-120.0	768.5	777.7	6.42	-2.26	6.13	Magnetic Steering
7947.0	77.50	97.30	7269.4	-123.7	799.6	809.0	3.28	-2.19	2.50	Magnetic Steering
7979.0	77.60	97.10	7276.3	-127.7	830.6	840.2	0.69	0.31	-0.62	Magnetic Steering
8010.0	77.80	96.70	7282.9	-131.3	860.6	870.5	1.42	0.65	-1.29	Magnetic Steering
8041.0	80.00	95.90	7288.9	-134.6	890.9	900.9	7.53	7.10	-2.58	Magnetic Steering
8072.0	80.20	95.70	7294.2	-137.7	921.2	931.4	0.91	0.65	-0.65	Magnetic Steering
8109.0	81.40	94.30	7300.2	-140.9	957.6	967.9	4.95	3.24	-3.78	Magnetic Steering
8141.0	81.40	94.30	7304.9	-143.3	989.2	999.5	0.00	0.00	0.00	Magnetic Steering

DISTRICT I

P.O. Box 1980, Hobbs, NM 88241-1980

DISTRICT II

P.O. Box Drawer DD, Artesia, NM 88211-0719

DISTRICT III

1050 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV

P.O. Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-10-2

Revised February 10, 1999

Instructions on back

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

AMENDED REPORT

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30 025 34528	2 Pool Code 96764	3 Pool Name MONUMENT SOUTHEAST AEO
4 Property Code 011127	5 Property Name VAN ETEN L.	6 Well No. 19
7 OGRID Number 022351	8 Operator Name TEXACO EXPLORATION & PRODUCTION INC.	9 Elevation 3544 GL

10 Surface Location


UL or lot no	Section	Township	Range	Lot Idn	Feet From The	North/South Line	Feet From The	East/West Line	County
O	9	20S	37E		467	SOUTH	1650	EAST	LEA

11 Bottom Hole Location If Different From Surface

UL or lot no	Section	Township	Range	Lot Idn	Feet From The	North/South Line	Feet From The	East/West Line	County
P	9	20S	37E		324	SOUTH	668	EAST	LEA

12 Dedicated Acre 80	13 Joint or Infill No	14 Consolidation Code	15 Order No.
-------------------------	--------------------------	-----------------------	--------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

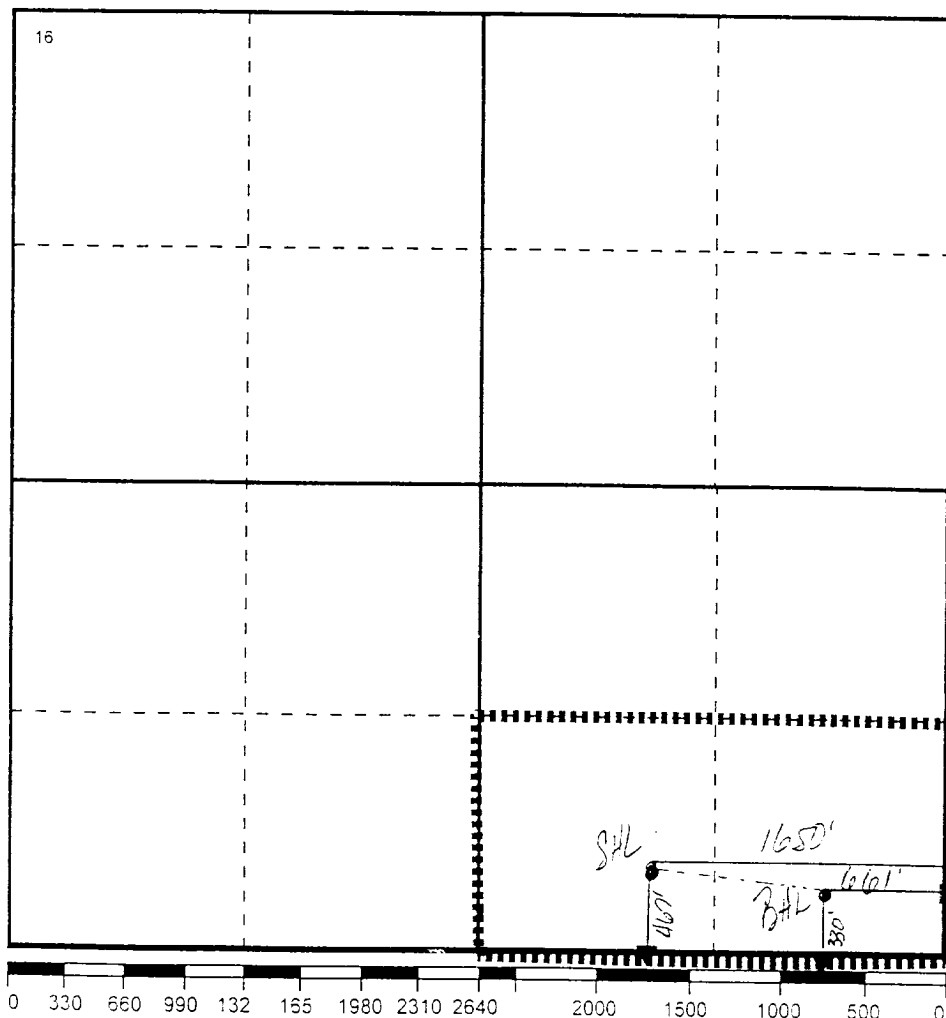

17 OPERATOR CERTIFICATION

I hereby certify that the information
contained herein is true and complete to the
best of my knowledge and belief.

Signature

Printed Name

J. Denise Leake

Position

Engineering Assistant

Date

4/6/01

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown
on this plat was plotted from field notes of
actual surveys made by me or under my
supervision, and that the same is true and
correct to the best of my knowledge and
belief.

Date Surveyed

Signature & Seal of
Professional Surveyor

Certificate No.