


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-104 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPPLICATE.

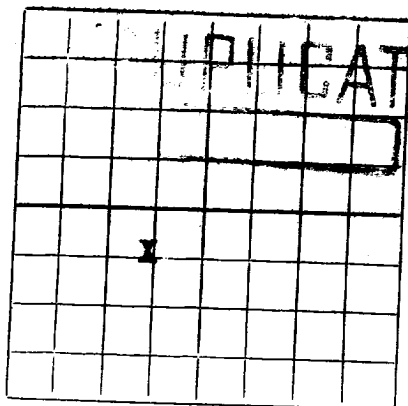

AREA 640 ACRES
LOCATE WELL CORRECTLY

The Texas Company

(Company or Operator)

C. H. Weir "A"

(Lease)

Well No. 1, in N.E. 1/4 of S.W. 1/4, of Sec. 12, T. 20-S, R. 37-E, NMPM.

Skaggs

Pool, Lea

Well is 1985 feet from South line and 1980 feet from West line

of Section 12. If State Land the Oil and Gas Lease No. is Patented

Drilling Commenced January 29, 1953 Drilling was Completed March 5, 1953

Name of Drilling Contractor Thompson-Carr, Inc.

Address Box 2524, Houston 1, Texas

Elevation above sea level at Top of Tubing Head 3569. The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from - to - No. 4, from - to -
No. 2, from - to - No. 5, from - to -
No. 3, from - to - No. 6, from - to -

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from - to - feet.
No. 2, from - to - feet.
No. 3, from - to - feet.
No. 4, from - to - feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
9-5/8	36#	New	1426	Hallib	-	-	-
7-5/8	26#	New	3678	Baker	-	-	-

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12-1/4	9-5/8	1439	1000	H.O.W. Co.	-	-
7-5/8	7-5/8	3689	600	H.O.W. Co.	-	-

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Open hole from 3785' to 3915' was shot with 330 quarts of Dupont Nitro. After hold was cleaned out, formation was treated from 3750' to 3930' with 2000 gallons of 15% regular acid.

Result of Production Stimulation After flowing out load, well flowed 13 barrels of oil in 4 hours.

Depth Cleaned Out 3930

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 3930 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing March 5, 1953
OIL WELL: The production during the first 24 hours was 54.87 barrels of liquid of which 100% was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity 32
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.	T. Devonian	T. Ojo Alamo
T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt	T. Montoya	T. Farmington
T. Yates	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	T. McKee	T. Menefee
T. Queen	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres	T. Granite	T. Dakota
T. Glorieta	T.	T. Morrison
T. Drinkard	T.	T. Penn
T. Tubbs	T.	T.
T. Abo	T.	T.
T. Penn	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	52	52	Caliche				
52	252	200	Caliche & red beds				
252	775	523	Red bed				
775	1045	270	Red bed & sand & shale				
1045	1167	122	Sand & shale				
1167	1195	28	Sandy shale				
1195	1330	135	Shale & shells				
1330	1370	40	Anhy & potash & shale				
1370	1436	66	Anhy & gyp & li				
1436	1485	49	Anhy				
1485	1820	335	Anhy & salt				
1820	1994	174	Salt				
1994	2640	646	Anhy & salt				
2640	3175	535	Anhy & gyp.				
3175	3225	50	Anhy & Potash				
3225	3300	75	Anhy & gyp.				
3300	3374	74	Anhy & Potash				
3374	3403	29	Anhy & lime				
3403	3930	527	Lime				
	3930		TOTAL DEPTH				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records. so far as furnished. March 26, 1953 (Date)

Company or Operator The Texas Company
Name

Address Box 1270, Midland, Texas
Position or Title Asst. Dist. Supt.