

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Co.
P 1980
Hobbs, NM 88241

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Conoco, Inc.

3. Address and Telephone No.

10 Desta Dr., Suite 100W, Midland, TX 79705 915-686-5424

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FNL & 1980' FEL

Sec. 26, T-20S, R-37E

5. Lease Designation and Serial No.

LC 031696A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

SEMU Eumont #64

9. API Well No.

30-025-06267

10. Field and Pool, or Exploratory Area

Eumont Y-SR-Qn

11. County or Parish, State

Lea, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____
- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Spot 35' cement on top of R.B.P. at 3510'.
2. Circulate hole with mud.
3. Spot 25 sxs cement 2910-3150'.
4. Perforate 5 1/2" casing at 1290'.
5. Squeeze 30 sxs cement through perms at 1290'. Leave top of cement at 1200' and tag.
6. Spot 20 sxs cement surface plug.
7. Install dryhole marker. Clean location.

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

14. I hereby certify that the foregoing is true and correct

Signed

Kay Maddex

Title

Regulatory Agent

Date

12/1/97

(This space for Federal or State office use)

Approved by

(ORIG. SGD.) LES BABYAK

Title


Date

Conditions of approval, if any:

CURRENT WELLBORE

11/18/97

Elev. = 3514' GL +8' KB

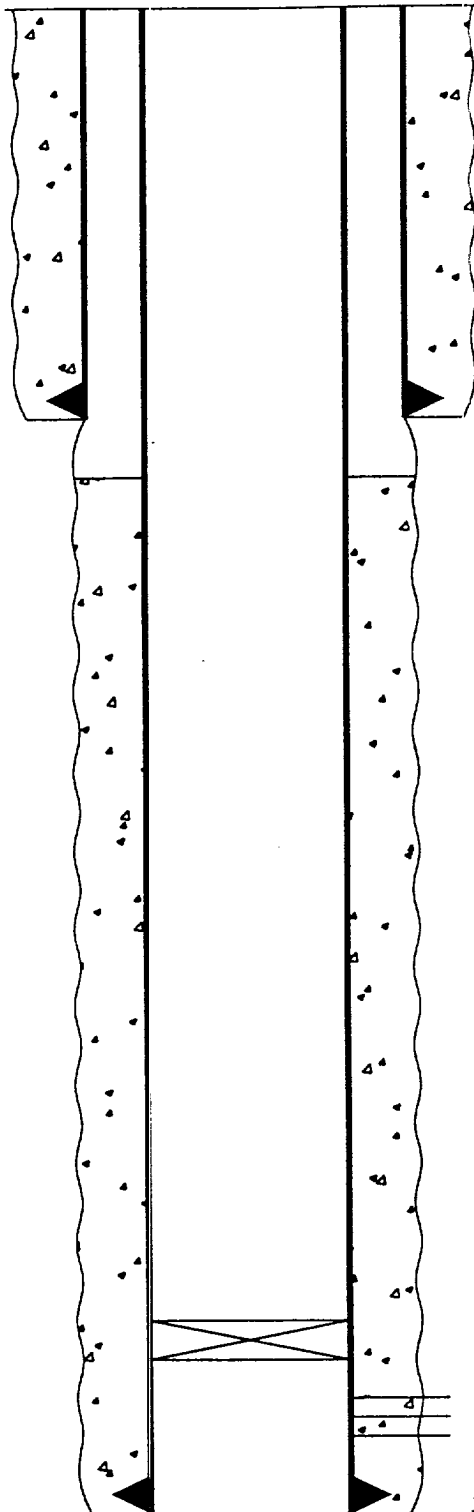

1282' - 8 5/8" Casing. Cemented w/650 sxs. Circulated to Surface

T.O.C. @ 1300'

R.B.P. @ 3500'

Perfs 3576'-3670'

3749' - 5 1/2" Casing. Cemented w/992 sxs

T.D. @ 3749'

CONOCO, INC.
SEMU Eumont #64
1980' FNL & 1980' FEL
Sec. 26, T-20S, R-37E
Lea County, NM

11/18/97

Spot 10 sxs Cement Surface Plug



3749' - 5 1/2" Casing. Cemented w/992 sxs

T.D. © 3749'

CONOCO, INC.
SEMU Eumont #64
1980' FNL & 1980' FEL
Sec. 26, T-20S, R-37E
Lea County, NM