

# NEW MEXICO OIL CONSERVATION COMMISSION MISCELLANEOUS REPORTS ON WELLS

Submit this report in triplicate to the Oil Conservation Commission District Office within ten days after the work specified is completed. It should be signed and filed as a report on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	X	REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

October 4, 1951

Date

Monument, New Mexico

Place

Following is a report on the work done and the results obtained under the heading noted above at the.....

Amerada Petroleum Corporation Fred Turner Well No. 1 in the  
Company or Operator Lease  
C/SW/4 SW/4 of Sec. 17, T. 20-S, R. 38-E, N. M. P. M.,  
Wildcat Pool Lea County.

The dates of this work were as follows: October 2, 1951

Notice of intention to do the work was (~~xxxxx~~) submitted on Form C-102 on October 2, 1951, 19.....  
and approval of the proposed plan was (~~xxxxx~~) obtained. (Cross out incorrect words.)

## DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

3830' - Total Depth - Line. Ran temperature survey found top of cement behind 8-5/8" casing at 1200', ratio of actual to calculated fill 72.6%. Checked top of cement at 3741'. Tested casing and connections with 1200# for 1/2 hour - no pressure drop. Drilled cement plug from 3741' to 3820'. Tested casing and connections with 1200# for 1/2 hour - no pressure drop. Started drilling formation and 7-3/8 hole @ 10:55 AM, 10/2/51

Witnessed by Dan Furse Name Amerada Petroleum Corporation Company Foreman Title

APPROVED:  
OIL CONSERVATION COMMISSION

Fred Turner Name  
Engineer Title

Date

10-9 1951

I hereby swear or affirm that the information given above is true and correct.

Name [Signature]

Position Assistant District Superintendent


Representing Amerada Petroleum Corporation Company or Operator

Address Drawer 10, Monument, New Mexico

DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION  
SANTA FE, NEW MEXICO

MISCELLANEOUS NOTICES

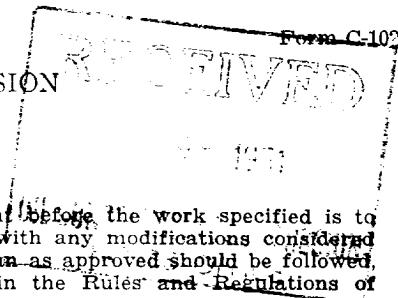

Submit this notice in triplicate to the Oil Conservation Commission or its proper agent before the work specified is to begin. A copy will be returned to the sender on which will be given the approval, with any modifications considered advisable, or the rejection by the Commission or agent, of the plan submitted. The plan as approved should be followed, and work should not begin until approval is obtained. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of notice by checking below:

NOTICE OF INTENTION TO TEST CASING SHUT-OFF	<input checked="" type="checkbox"/>	NOTICE OF INTENTION TO SHOOT OR CHEMICALLY TREAT WELL	
NOTICE OF INTENTION TO CHANGE PLANS		NOTICE OF INTENTION TO PULL OR OTHERWISE ALTER CASING	
NOTICE OF INTENTION TO REPAIR WELL		NOTICE OF INTENTION TO PLUG WELL	
NOTICE OF INTENTION TO DEEPEN WELL			

Monument, New Mexico

October 2, 1951

Place

Date

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico

Gentlemen:

Following is a notice of intention to do certain work as described below at the

Amerada Petroleum Corporation Fred Turner Well No. 1 in C/SW/4 SW/4  
Company or Operator Lease  
of Sec. 17, T. 20-S, R. 38-E, N. M. P. M. Wilcat Field.  
Lea County.

FULL DETAILS OF PROPOSED PLAN OF WORK

FOLLOW INSTRUCTIONS IN THE RULES AND REGULATIONS OF THE COMMISSION

**3830' - Total Depth.- Lime. Finished drilling 11" hole @ 11 PM, 9/29/51.**  
**Ran Schlumberger's Electrical, Gamma Ray and Microlog Surveys. Ran**  
**8-5/8" casing as follows:**

40 Jts 8-5/8" OD 36# J-55 8-RT A.O.S. EW R-3 Csg. New	1763.04
48 Jts 8-5/8" OD 32# J-55 R-3 8-RT SS Csg. New	1990.40
2 Jts 8-5/8" OD 36# J-55 A.O.S. EW R-3 8-RT Csg. New	67.48
<u>90</u>	<u>3820.92</u>

Casing set at 3830' and cemented with 1450 sax regular cement of which 1000 sax were mixed 3% Jel and 50 Sax Incor Cement - Total 1500 sax. Plug to 3741' at 10:20 PM, 9/31/51. Max pump pressure 900#. After W.O.C. approximately 24 hours will test for casing shut-off.

Approved 10-2, 1951  
except at follows:

Amerada Petroleum Corporation

Company or Operator

By [Signature]

Position Assistant District Superintendent  
Send communications regarding well to

Name Amerada Petroleum Corporation

Address Drawer D, Monument, New Mexico

OIL CONSERVATION COMMISSION,

By [Signature]

Title Engineer