


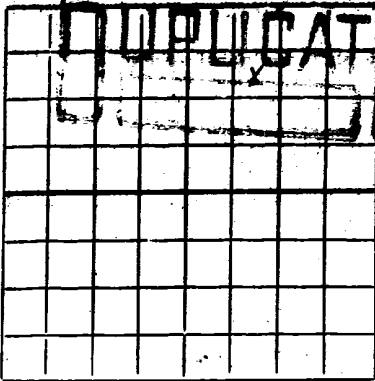

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

RECEIVED

JAN 19 1952

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Tide Water Associated Oil Company

Trickley-Stanford Unit "A"

(Company or Operator)

(Lease)

Well No. 1, in NW 1/4 of NE 1/4, of Sec. 18, T. 20-S, R. 38-E, NMPM.

North Warren McKee

Pool,

Lea

County.

Well is 990 feet from North line and 1650 feet from East line

of Section 18-103-38E. If State Land the Oil and Gas Lease No. is (Patent)

Drilling Commenced 9/15, 1952. Drilling was Completed 12/19, 1952.

Name of Drilling Contractor Arrow Drilling Company

Address Tulsa, Oklahoma

Elevation above sea level at Derrick Floor 3573'

The information given is to be kept confidential until

Not confidential, 19

OIL SANDS OR ZONES

No. 1, from 9070' to 9160' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8"	32#	New	240'	Tex Pattern	-	None	Surface Casing
8-5/8"	24 & 32#	New	3808'	Halliburton	-	None	Salt String
5-1/2"	15.5 & 17#	New	9408'	Baker	-	(9070 - 9160')	Production String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/4"	13-3/8"	295'	325	Halliburton	Natural	-
11"	8-5/8"	3799'	1800	"	9.0#/gal	-
7-7/8"	5-1/2"	9399'	400	"	9.4#/gal	-

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Not treated or shot

ILLEGIBLE

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 1 feet to 9158 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing December 22, 1952

OIL WELL: The production during the first 24 hours was 325.44 barrels of liquid of which 100% was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity.

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.		T. Devonian	7955	T. Ojo Alamo	
T. Salt		T. Silurian		T. Kirtland-Fruitland	
B. Salt		T. Montoya	8479	T. Farmington	
T. Yates		T. Simpson	8780	T. Pictured Cliffs	
T. 7 Rivers		T. McKee	9060	T. Menefee	
T. Queen		T. Ellenburger	9292	T. Point Lookout	
T. Grayburg		T. Gr. Wash.		T. Mancos	
T. San Andres	4304	T. Granite		T. Dakota	
T. Glorieta	5362	T. Fusselman	8268	T. Morrison	
T. Drinkard	6320 (222)	T.		T. Penn	
T. Tubbs	6362	T.		T.	
T. Abo		T.		T.	
T. Penn	7342	T.		T.	
T. Miss		T.		T.	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	300	300	Surface Sands				
300	1300	1000	Red Beds				
1300	1800	500	Anhydrite & Gyp				
1800	2420	620	Anhydrite & Salt				
2420	3535		Anhydrite & Gyp				
3535	3687		Anhydrite & Lime				
3687	7591		Lime				
7591	7647		Lime & Shale				
7647	7707		Lime & Chert				
7707	7723		Chert				
7723	8063		Chert & Lime				
8063	8204		Chert				
8204	8796		Chert & Lime				
8796	9158		Shale & Lime				
9158	9158		Sand, Shale, Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

January 16, 1953

(Date)

Company or Operator Tide Water Assoc. - Oil Co.

Address Box 547 Hobbs, New Mexico

Name H. P. Shackelford

Position or Title District Foreman

Directional Surveys

<u>Depth</u>	<u>Degrees</u>	<u>Depth</u>	<u>Degrees</u>
480	0	7691	3=3/4
961	1/4	7705	4
1420	1/4	7710	4=1/2
1680	0	7726	4=1/4
2150	3/4	7738	4=1/4
2345	3/4	7750	3=3/4
2860	1=3/4	7784	4
2808	1	7805	4
3070	3/4	7834	4=1/4
3255	1/4	7856	4
3490	3/4	7883	4
3600	1/4	7913	3=3/4
3750	1/2	7929	3=3/4
4000	3/4	7947	3=1/2
4175	1/4	7968	3=1/2
4400	1/2	8049	3=1/4
4732	1/2	8050	3
4920	1/4	8055	3
5028	1/2	8098	3
5291	1/2	8115	3
5460	1=1/2	8154	4
5650	1/4	8168	3=1/2
5750	1	8193	4
5825	3/4	8282	4=1/2
5916	3/4	8330	4
6015	1/4	8346	4
6115	3/4	8379	3=3/4
6200	3/4	8470	4
6300	3/4	8517	3=3/4
6840	1/2	8558	3=1/4
6695	1/2	8601	3
7200	1/2	8628	2=3/4
7410	1	8748	3=1/4
7490	3/4	8790	3=1/4
		9000	2=1/2