


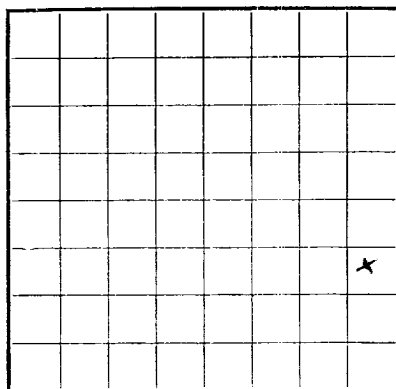

LOCATE WELL CORRECTLY

U. S. LAND OFFICE Las Cruces
SERIAL NUMBER 062170-A
LEASE OR PERMIT TO PROSPECT _____UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company L. E. Elliott Address Box 703, Roswell, New Mexico
Lessor or Tract L. E. Elliott Field Littman-San Andres State New Mexico
Well No. 3 Sec. 8 T. 21S R. 38E Meridian N.M.P.M. County Lea
Location 1650 ft. ^(N.)_(S.) of S Line and 330 ft. ^(E.)_(W.) of E Line of Sec. 8 Elevation 3576 (Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed _____

Date June 6, 1955Title Agent

The summary on this page is for the condition of the well at above date.

Commenced drilling 5/15, 1955 Finished drilling 5/31, 1955

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 4325 to 4350 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8 5/8	24	8	J & L	1521	Guide				
5 1/2	14	8	J & L	1615	Packer				

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 5/8	1631	550	Plug	9.0	
5 1/2	4325	350	Plug	9.2	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from Surface feet to T.D. feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

6/6, 1955 Put to producing 5/31, 1955The production for the first 24 hours was 132 barrels of fluid of which 100% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, °36.

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

H. E. Grantham, Driller A. B. Carroll, Driller
Wayne Ballev, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	54	54	Sand
54	1255	1201	Red Beds
1255	1610	355	Red Beds & Shells
1610	1760	150	Anhydrite
1760	2968	1208	Salt & Anhydrite
2968	3259	291	Anhydrite
3259	3367	108	Anhydrite, lime & Shells
3367	3720	353	Anhydrite & Lime
3720	4359	639	Lime

Top San Andres 4325

This well was treated with 2500 gallons acid followed after clean-up with 10,000 gallons acid-frac 1 1/2 sand per gallon.

