

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO. 30 025 09000
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name H.S. RECORD
8. Well No. 1
9. Pool name or Wildcat JALMAT (TAN YATES 7 RIV.)

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: OIL WELL ☒ GAS WELL ☐ OTHER ☐	
2. Name of Operator MERIDIAN OIL INC.	
3. Address of Operator P.O. Box 51810, Midland, TX 79710-1810	
4. Well Location Unit Letter <u>A</u> : <u>660</u> Feet From The <u>NORTH</u> Line and <u>660</u> Feet From The <u>EAST</u> Line Section <u>22</u> Township <u>22S</u> Range <u>36E</u> NMPM Lea County	
10. Elevation (Show whether DF, RKB, RT, GR, etc.) 3530' GR	

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐	ALTERING CASING ☐
PULL OR ALTER CASING ☐	COMMENCE DRILLING OPNS. ☐
OTHER: ☐	PLUG AND ABANDONMENT ☐
	CASING TEST AND CEMENT JOB ☐
	OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

MIRU. Install BOPE. Spot 10 bbl 10 ppg gelled brine mud on bottom. POH w/tubing.

RIH w/ 4" CIBP on wireline and set @ 3337'. Cap w/ 35' Class C cement.

RIH w/ tubing to 3275' and circulate hole w/ 10 ppg gelled brine mud. Pick up to 3250' and spot 25 sx Class C plug @ 3250'.

Pick up to +/- 1650'. Spot 25 sx Class C cement plug. POH w/ tbg. ND BOPE. RIH w/ tbg to +/- 241'. Spot 25 sx Class C cement plug and circulate to surface.

Cut casing 3' below surface. Weld plate and abandonment marker to casing. Restore location as directed.

PLEASE SIGN FOR TO THE BEGINNING OF
PLUGGING OPERATIONS FOR THE C-103
TO BE APPROVED.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Production Asst. DATE 8/24/93

TYPE OR PRINT NAME Dana Williams TELEPHONE NO. 688-6943

(This space for State Use)

APPROVED BY ORIGINAL SIGNED BY JERRY SEXTON TITLE DISTRICT I SUPERVISOR DATE AUG 26 1993

CONDITIONS OF APPROVAL, IF ANY:

MERIDIAN OIL

FIELD: JALMAT (TANSILL, YT, 7RV)

DATE SPUD: 08/03/48 COMP: 12/06/81

LEASE: H.S. RECORD

WELL NO. 1

ELEVATION: 3,530' G.L.

LOCATION: 660' FNL & 660' FEL; SEC. 22, T-22-S, R-36-E

LEA COUNTY, NEW MEXICO

Casing Detail

SIZE	WT.	GRD.	CPLG.	DEPTH
5-1/2"	14#	H-40	UNK	0-3200'
4"	11.34#	N-80	FL.JT.	2982-3913'


10 ppg Gelled Brine Mud

TOL @ 2982'

CIBP @ ±3337'
Cap w/35' Cement

10 ppg Gelled Brine Mud

CIBP @ ±3625'
Cap w/10' Cement

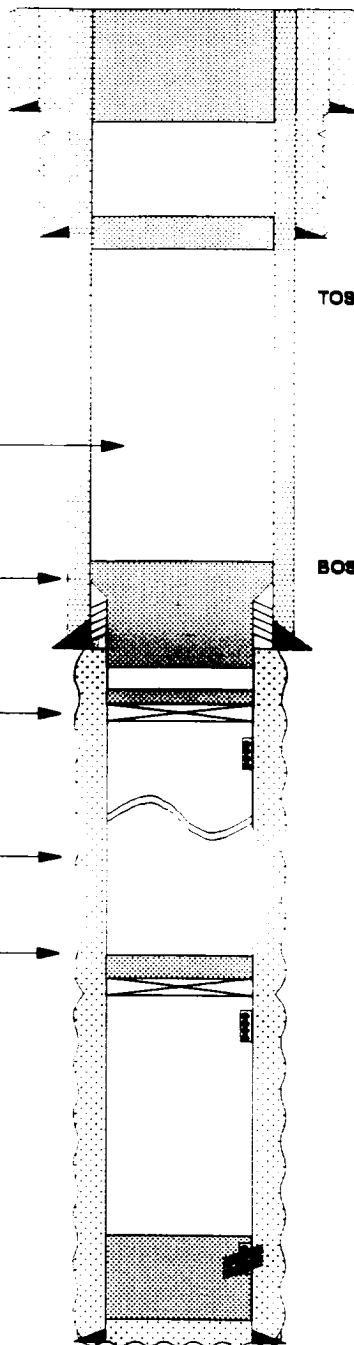

PROPOSED P/A CONFIGURATION

TD: 3914'
PSTD: 3615'

Plug: 25 ex Cement Surface Plug

13-3/8", 48# SET @ 59'
ST&C
Cement w/50 ex
In 15-1/2" Hole
TOC: Surface (circ.)

9-5/8", 32.3# SET @ 1584'
K-55, STC (9.001" I.D.)
Cement w/1000 ex
In 11" Hole
TOC: Surface (circ.)

TOS @ 1600'

Plug: 25 ex (241') Cement @ 1644'

BOS @ 3030'

5-1/2" 14# SET @ 3200'
(5.012" I.D.)
Cement w/500 ex
TOC: Surface (Calc.)
Plug: 25 ex (378') Cement @ 3337'

Yates Perforations:
3367'-3632'

Queen Perforations:
3679'-3781'

3639'-3661'
Squeezed w/150 ex Cement

4" Fl. Lt., 11.34# (3.428" I.D.) liner
2982' to 3913'
Cement w/250 ex
In 4-3/4" Hole
TOC @ 2982'

MERIDIAN

FIELD: JALMAT (TANSILL, YT, 7RV) **DATE SPUD:** 08/03/48 **COMP:** 12/08/81
LEASE: H.S. RECORD **WELL NO.** 1 **ELEVATION:** 3,530' G.L.
LOCATION: 660' FNL & 660' FEL; SEC. 22, T-22-S, R-36-E
 LEA COUNTY, NEW MEXICO

Casing Detail

SIZE	WT.	GRD.	CPLG.	DEPTH
5-1/2"	14#	H-40	UNK	0-3200'
4"	11.34#	N-80	FL.JT.	2982-3913'

