


Well Name & No.		HANSEN STA NO. 6		Field	MONUMENT		Date 09/14/01
County	LEA	API	3002520535	State	NEW MEXICO	By	TIM L CHASE
Spudded	6/27/1963	Comp Drig	7/23/1963	Location	1980' FNL & 1650' FEL, Section 16, Township 20S, Range 37E, UL 'G'		

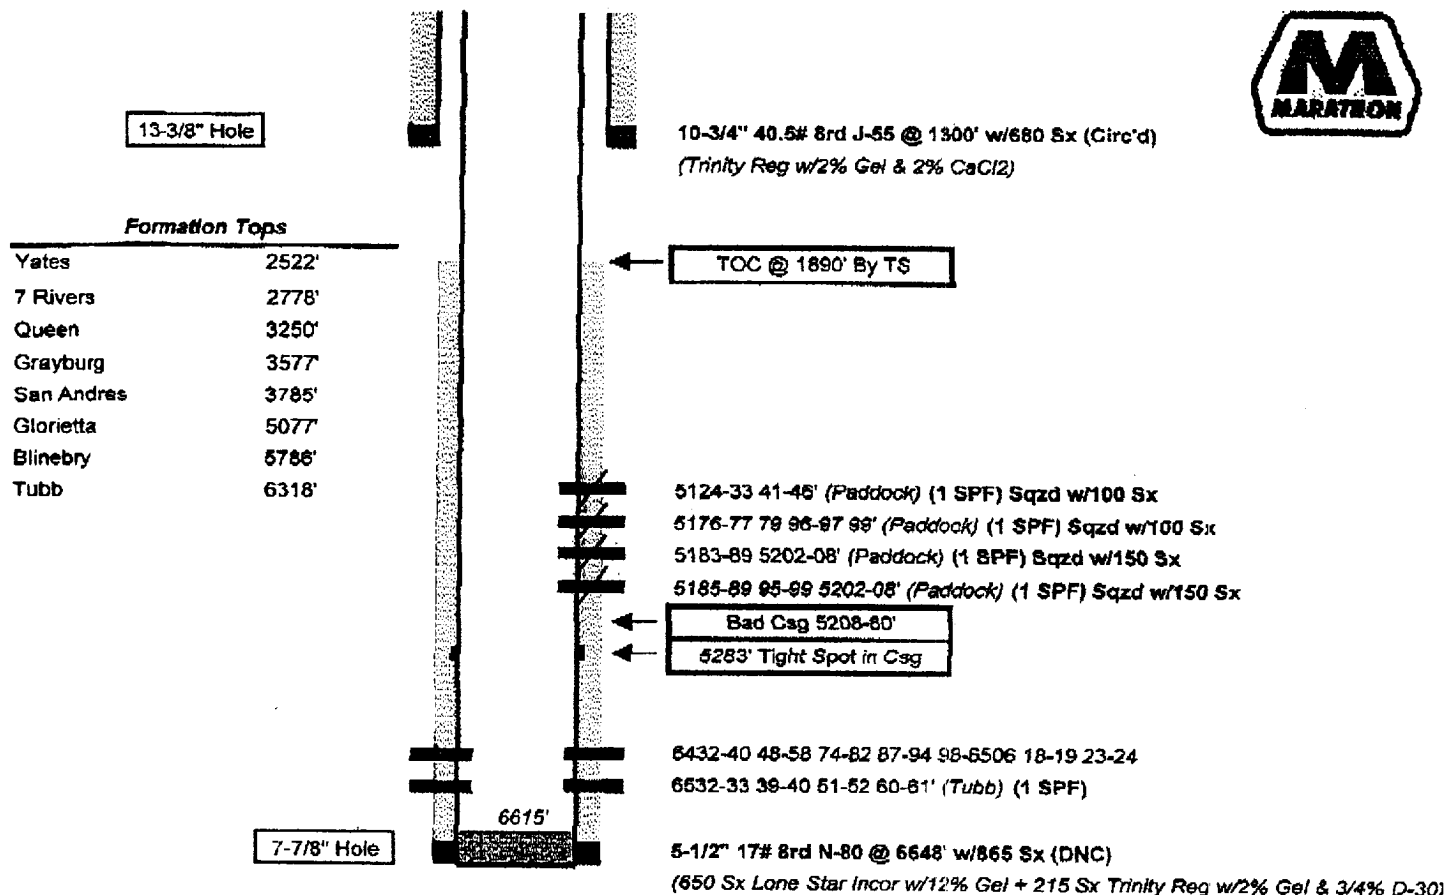

GL: 3541' DF: 3550' KB: 3551'
PSTD: 4950' TD: 6650'

Well History

- Jul '63 Perf'd Tubb (1 SPF) @ 6518-19 23-24 32-33 39-40 51-52 60-61'. Acidz'd same w/6000 gal Ne LST & 2065 gal Reg Ne. Turned to prod flwg 60 BOPD + 19 BWPD + 87 MCFPD thru 3/4" choke @ 275#.
- Sep '63 Changed out gas lift valves. Ret to prod flwg 48 BOPD + 4 BWPD.
- Aug '64 Repaired gas lift valves. Ret to prod flwg 18 BOPD + 2 BWPD.
- Mar '71 Shut in well due to low production.
- May '75 Set CIBP @ 5996' w/38' cmt cap to isolate Tubb. Perf'd Paddock (1 SPF) @ 5124-33 41-46'. Acidz'd same w/4000 gal 15% Swabbed. Installed pumping equipment. Sqzd Paddock perms 5124-46' w/100 sx. DOC. Perf'd Paddock (1 SPF) @ 5183-89 5202-08'. Sqzd Paddock perms 5183-5208' w/150 sx. DOC. Perf'd Paddock (1 SPF) @ 5185-89 95-99 5202-08'. Acidz'd same w/2500 gal 15% Ne. Turned to prod ppg from Paddock.
- Jul '75 Sqzd Paddock perms 5185-5208' w/150 sx. Perf'd Perf'd Paddock (1 SPF) @ 5176-77 79 96-97 99'. Frac'd same w/4000 gal 2% Kcl wtr w/5000# sd. Acidz'd same w/1400 gal 15% Ne. Ret to prod ppg 0 BOPD & 169 BWPD. Shut in well.
- May '83 Sqzd Paddock perms 5176-99' w/100 sx (left 10 sx in csg). Perf'd 5-1/2" csg w2 shots @ 1350'. Sqzd same w/500 sx 'C' Neat w/2% Kcl. DOC. Re-sqzd perms @ 1350' w/100 sx 'C' Neat. DOC. (Hit tight spot @ 5283'). D/O CIBP @ 5996' & C/O to 6615'. Csg Inspection log showed bad csg @ 5208-80'. Perf'd Tubb (1 SPF) @ 6432-40 48-58 74-82 87-94 98-6506'. Acidz'd same w/8000 gal 15% NeFe. Swabbed. Re-acidz'd same w/4100 gal 15% NeFe. Swabbed all wtr. POOH & LD all tubulars. Shut in well.