

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPL
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 1004-0135
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐	7. UNIT AGREEMENT NAME
2. NAME OF OPERATOR Conoco Inc.	8. FARM OR LEASE NAME Semu Tubb A/C 1
3. ADDRESS OF OPERATOR P.O. Box 460 - Hobbs, New Mexico 88240	9. WELL NO. No. 83
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface 1830' FTL & 2130' FEL - Unit Letter G 1380/N	10. FIELD AND POOL, OR WILDCAT Monument Tubb
14. PERMIT NO. 30-025-20653	11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA 13-20S-37E
15. ELEVATIONS (Show whether DF, RT, GR, etc.)	12. COUNTY OR PARISH Lea
	13. STATE NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREAT

MULTIPLE COMPLETE

FRACTURE TREATMENT

ALTERING CASING

SHOOT OR ACIDIZE

ABANDON*

SHOOTING OR ACIDIZING

ABANDONMENT*

REPAIR WELL

CHANGE PLANS

(Other)

(Other)

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

MIRU. Run csq scraper to 6500'. POOH. Set CIBP at 6400'. Circulate w/156 bbls 9.5 ppq mud (25 sxs salt gel/100 bbl 9 ppq brine). Spot 25 sxs class "C" neat cement from 6400'-6190'. POOH w/Hbg. Spot 30 sxs class "C" neat cement from 5760'-5470'. POOH w/Hbg. Spot 25 sxs class "C" neat cement from 3090'-2850'. POOH w/Hbg. Spot 25 sxs class "C" neat cement from 1750'-1510'. POOH w/Hbg. Perf w/4 jspF at 1400'. Unable to pump into 5 1/2" csq w/2000#. Perf w/4 jspF at 1300'. Establish pump-in rate of 3 BPM @ 1700#. Establish circulation. Pump 320 sxs class "C" neat down 5 1/2" csq & circulate cement out. Left cement in 5 1/2" csq at surface. Install Pd A marker.

18. I hereby certify that the foregoing is true and correct

SIGNED DE FINNEY

TITLE Administrative Supervisor

DATE September 10, 1987

ACCEPTED FOR RECORD

APPROVAL
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

SEP 16 1987

SJS

*See instructions on Reverse Side

CARLSBAD, NEW MEXICO


Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

BLM-Carlsbad (6) ARCO (2) Amoco (2) Chevron (1) File

RECEIVED
SEP 24 1967
OFFICE

SEMU No *83

1830' F.V.L. + 2130' F.L.L.
 Cemented Sec. 13, T-208, 12-20E

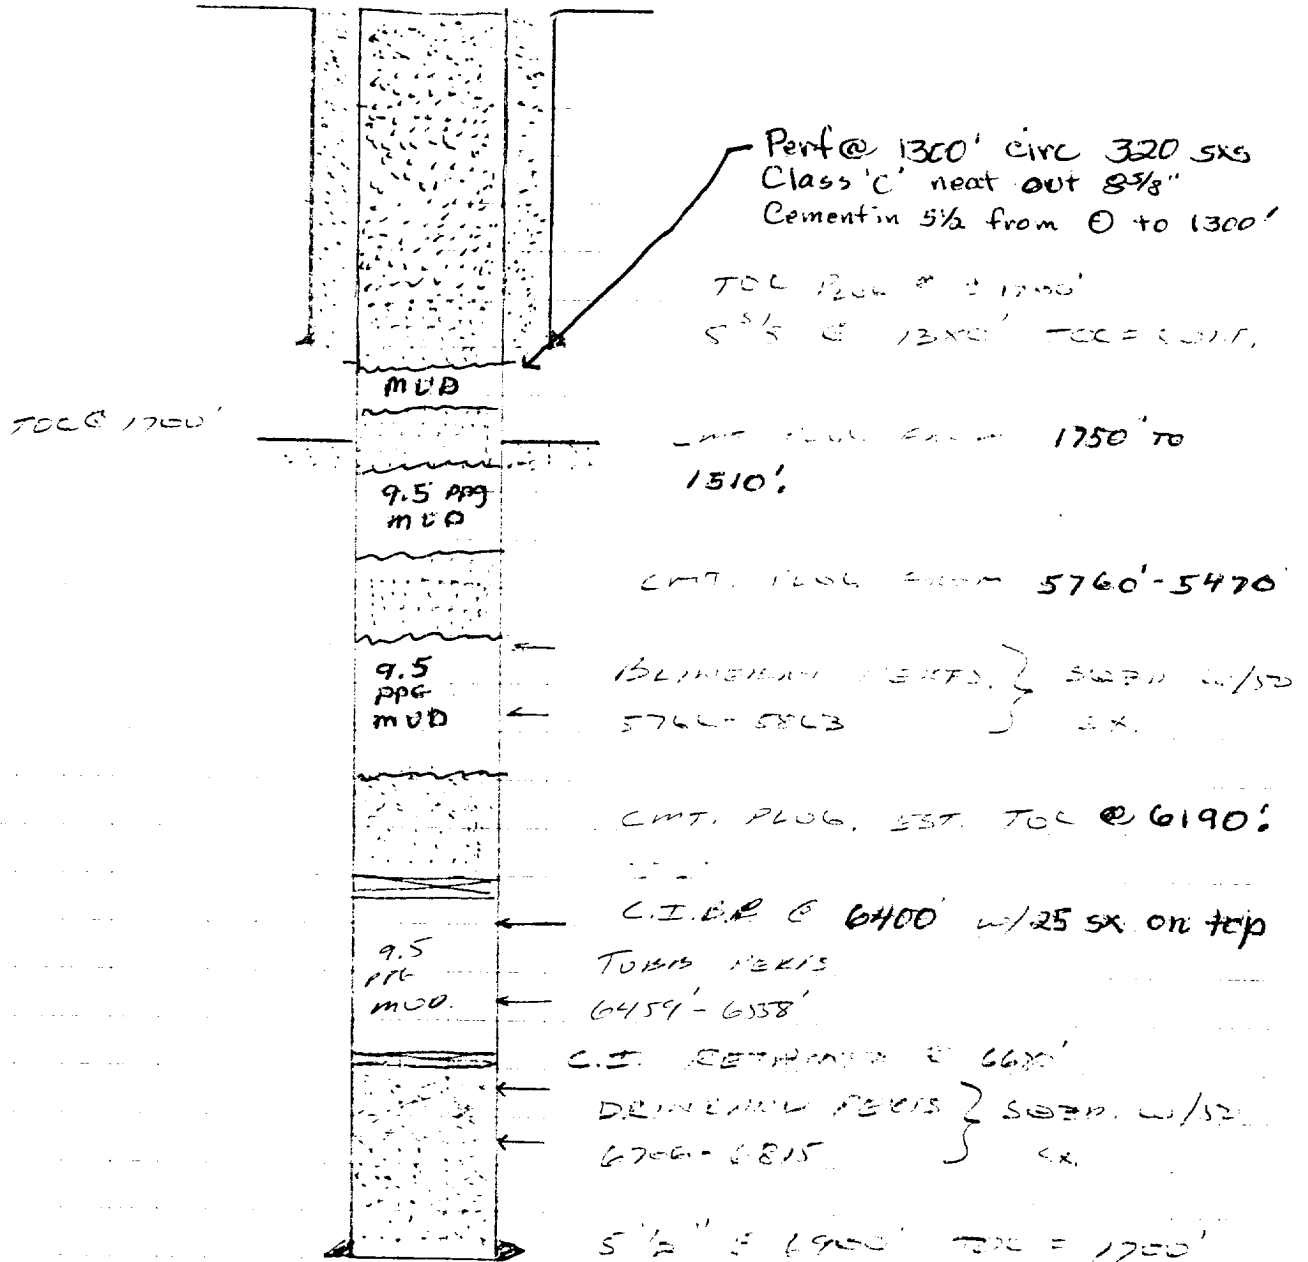

Final P/A conditions

Made by **DRP**
 Checked by
 Date **8/24/87**
 Page 1 of 1

Genoco Inc
 Calculation Sheet

Job #

Field

Str.

100-44-10000

RECEIVED
SEP 24 1987
OCD
HOBBS OFFICE