

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised March 25, 1999

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-28480
1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Greka Energy		6. State Oil & Gas Lease No. 018031
3. Address of Operator Greka Energy, Suite 220, Houston, Tx 77042		7. Lease Name or Unit Agreement Name: San Simon 5 St
4. Well Location Unit Letter <u>EG</u> : 1980 feet from the <u>N</u> line and 1980 feet from the <u>E</u> line Section <u>5</u> Township <u>22S</u> Range <u>35E</u> NMPM County <u>Lea</u>		8. Well No. 2
10. Elevation (Show whether DR, RKB, RT, GR, etc.) 3631 (GL)		9. Pool name or Wildcat San Simon Wolfcamp

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	PLUG AND ABANDONMENT ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPLETION ☐	CASING TEST AND CEMENT JOB ☐	
OTHER: ☐		OTHER: ☐	

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

See attached well bore schematic.
Attempt to sting out of pkr. If unsuccessful will cut tbg @ ~11550'.
Pump 25sx cmt plug @ 7' csg shoe @ 10975'. (10674' - 11070')
Pump 25sx cmt plug @ 7950' in cased hole.
Pump 25sx cmt plug @ 9 5/8" csg shoe @ 5750'. (5597' - 5800')
Cut 7" csg @ TOC, ~5200'. POH csg. Pump 25sx cmt plug @ stub. (5097' - 5200')
Pump 25sx cmt plug @ 1800' @ salt zone.
Pump 25sx cmt plug @ 13 3/8" csg shoe @ 1075'. (1022' - 1125')
Pump 13sx cmt plug @ surf. (0' - 60')
Cut off wellhead and install deadman marker

WELL MUST BE IN COMPLIANCE
WITH RULE 202 BY

4/15/02

I hereby certify that the information above

SIGNATURE

[Signature]

TITLE

PROD FOREMAN

DATE 2-12-02

Type or print name Tracy Headstream

Telephone No. (505) 390-7462

(This space for State use)

APPROVED BY

ORIGINAL SIGNED BY
J. L. WILLIAMS

DATE

Conditions of approval, if any:

THE COMMISSION MUST BE NOTIFIED 24
HOURS PRIOR TO THE BEGINNING OF
PLANNING OPERATIONS FOR THE CLOSING
TO BE APPROVED.

FEB 12 2002

PLUGGING & ABANDONMENT WORKSHEET

(3 STRING CSNG)

OPERATOR GREGA ENERGY

LEASENAME SAN SIMON 555

SECT 5 TWN 225 RNG 35E

FROM 1980 NWSL 1980 EWL

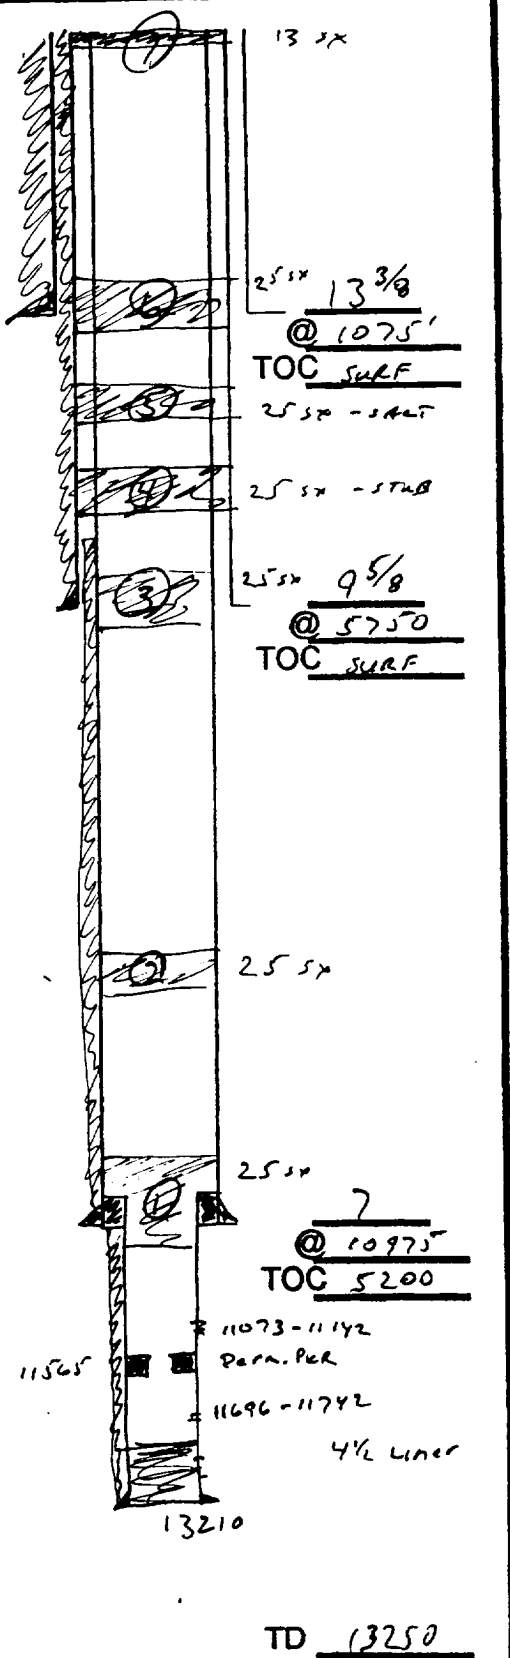
TD: 13250 INFORMATION @ TD

PBTD: 13210 FORMATION @ PBTD

	SIZE	SET @	TOC	TOC DETERMINED BY	
SURFACE	13 3/8	1075	SURF	CIRC	
INTMED 1	9 5/8	5750	SURF	CIRC	
INTMED 2					
PROD	7	10975	5200	CALC	
	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1	4 1/2	10688	13247	10620	CALC
LINER 2					
	CUT & PULL @			TOP - BOTTOM	
INTMED 1			PERFS	11073 - 11742	
INTMED 2			OPENHOLE	0 -	
PROD	7" @ 5200'				

*** REQUIRED PLUGS DISTRICT I**

RUSTLER (ANYID)	
YATES	
QUEEN	
GRAYBURG	
SAN ANDREW	
CAPTAIN REEF	
DELAWARE	
BELL CANYON	
CHERRY CANYON	
BRUSHY CANYON	
BONE SPRING	
GLORIETA	
SLINGERBY	
TUBB	
DRINKARD	
ABO	
WC	
PENN	
STRAWN	
ATOKA	
MORROW	
ADEN	
DEVONIAN	

[illegible]

SAN SIMON 5 ST #2
 Sec 5, T22S, R36E
 Lea County, NM

Proposed

KB: 20'

GL: 3621'

13 3/8" 61# K-55 @ 1075'

cmtd w/965 sx CI C to surf

9 5/8" 36# & 40# K-55 @ 5750'

cmtd w/3350 sx Lite & CI C to surf

2 3/8" 4.7# L-80 U NuLok & N-80 EUE tbg

w/Otis Perma-Lach pkr & nipples @ 11600'

7" 23# S-95 @ 10975'

cmtd w/700 sx Lite & CI H

Perfs: 11073-142' (Wolfcamp)

Perfs: 11696-742' (Strawn)

Perfs: 12758-946' (Morrow) squeezed

4 1/2" 13.5# N-80 @ 13247' (top @ 10688') cmtd w/475 sx CI H

FBR @ 10673'

Oris Perma-lach pkr @ 11580'

11565

50 sx squeeze TOC @ 12500'

PBTD: 13210'

TD: 13250'

"X" nipple @ 11579

11/5/94
 2SPF