

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

P.O. BOX 1980
CARLSBAD, NEW MEXICO 88240

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
CONOCO INC.

3. Address and Telephone No.
10 Desta Drive STE 100W, Midland, TX 79705 (915) 686-6551

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2203' FSL, 2058' FEL
SEC. 28, T-20S, R-38E.

5. Lease Designation and Serial No.
LC 031695B

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.
WARREN UNIT # 108

9. API Well No.
30-025-32666

10. Field and Pool, or Exploratory Area

WARREN DRINKARD

11. County or Parish, State

LEA, NM

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice


TYPE OF ACTION

☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other SET PRODUCTION CSG
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

10-18-94 DRILL TO TD OF 6975'. RIH W/158 JTS 7" 26# K-55 8R LTC CSG SET @ 6970'. SHOE SET @ 6975'. COLLAR SET @ 6931'. LEAD SLURRY 75 SX 35:65:6 BJ LITE, .2% SMS. TAIL SLURRY 300 SX CLASS C, 1% BA-10, 1% A-7, .2% SMS. DISPLACED W/266 BBL OF FW. BUMPED PLUG @ 12:35 PM ON 10-17-94 W/1500 PSI. STAGE 2 COLLAR DEPTH SET @ 4998'. LEAD SLURRY 660 SX 35:65:6 BJ LITE, .2% SMS. TAIL SLURRY 515 SX CLASS C, 1% BA-10, .2% SMS. DISPLACED W/191 BBL OF FW. BUMPED PLUG @ 6:50PM. ON 10-17-94 W/2800 PSI. NOTIFIED BLM @ 5:30 AM ON 10-17-94. RELEASED RIG 3AM 10-18-94.
CURRENTLY WAITING ON COMPLETION RIG.

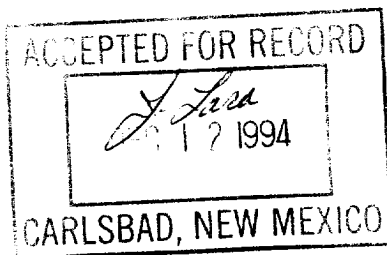

14. I hereby certify that the foregoing is true and correct

Signed *[Signature]*

Title STAFF REGULATORY ASSISTANT

Date 10-22-94

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

RECEIVED

DEC 14 1994

OCD
OFFICE