

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
N.M. Oil Cons. Division
1625 N. French Dr.
Hobbs, NM 88240

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.
NM-59377 *69377*

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Red Tank 28 Federal #4

9. API Well No.

30-025-36009

10. Field and Pool, or Exploratory Area

W. Red Tank Delaware

11. County or Parish, State

Lea County, NM

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Pogo Producing Company

3. Address and Telephone No.

P. O. Box 10340, Midland, TX 79702-7340 (915)685-8100

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

330' FSL & 2310' FEL, Section 28, T22S, R32E

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Spud

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spud & Set Surface Csg - MIRU Patterson #49. Spud well @ 20:30 hrs 12/15/02. Drld 17-1/2" hole to 805'. TD reached @ 04:30 hrs 12/17/02. Ran 18 jts 13-3/8" 54.5# J-55 ST&C csg. BJ cmt'd w/ 745 sks 65:35 POZ "C" @ 12.8 ppg followed by 200 sks CI "C" + 2% CaCl2 @ 14.8 ppg. Circ 175 sks to surface. WOC 24 hrs. Make cut-off. Weld on WH. NU BOP's and test ok.

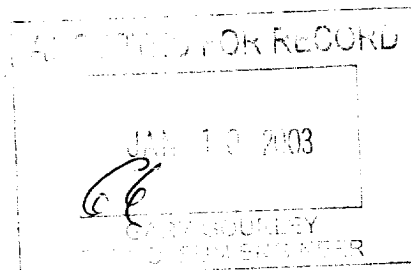

14. I hereby certify that the foregoing is true and correct

Signed *Cathy Imbelle*

Title Sr. Operation Tech

Date 01/07/03

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title

Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

GW

*See Instruction on Reverse Side