


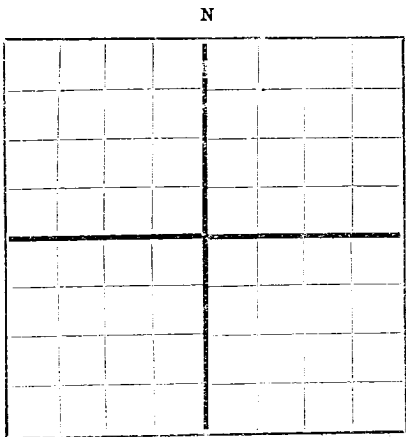

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Wilson Oil Company P.O. Box 627 Santa Fe, New Mex.
State **B-9084** Company or Operator **37** in **SW SW NW** of Sec. **15**, T. **21**
Lease **34** Well No. **West Wilson** Field, **Lea** County.
R. **2310**, N. M. P. M. **4950** feet south of the North line and **4950** feet west of the East line of **Sec 15**
Well is **B-9084** Assignment No. _____
If State land the oil and gas lease is No. _____ Address _____
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is **Wilson Oil Company** Address **Santa Fe, N.M.**
Drilling commenced **12-10-49** 19____ Drilling was completed **1-19-50** 19____
Name of drilling contractor **Company Tools** Address _____
Elevation above sea level at top of casing **3707'** feet.
The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from **3910** to **3913** No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from **280** to **300** feet **1 B W P H.**
No. 2, from _____ to _____ feet _____
No. 3, from _____ to _____ feet _____
No. 4, from _____ to _____ feet _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
13	48	8 rd	New	167					Surface
10"	38	8 H	S.H.	840					Water shut-off
8"	28	8 Rd	S.H.	1380					" "
7"	20	8 Rd	New	3869					Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
15	13	178	125	Haliburton		
8	7	3869	300	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from **0** feet to **3913** feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **1-19** 19 **50**.
The production of the first 24 hours was **384** barrels of fluid of which **100** % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

J. M. McKinzie Driller **Williams** Driller
W. E. Mashburn Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **3** day of **Feb.** 19 **50**.
Notary Public _____
My Commission expires **August 28, 1953**.
Artesia, New Mexico **2-3-50**
Name **Raymond Lamb**
Position **Assistant to the President**
Representing **Wilson Oil Company**
Address **P.O. Box 627 Santa Fe, New Mexico**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	15	15	Surface sand
15	120	105	Sand
120	130	10	Gravel
130	178	48	Red beds
178	280	102	Red beds
280	340	60	Sand L B W P H @ 280
340	720	380	Red shale
720	745	25	Brown shale
745	825	80	Red shale
825	844	19	Gry sand
844	1015	171	Red shale and sand
1015	1065	50	Sand and shale
1065	1095	30	Sandy shale
1095	1195	100	Sand and shale
1195	1420	225	Shale
1420	1425	5	Sand
1425	1747	322	Red shale
1747	1800	53	Anhydrite
1800	1815	15	Salt and Anhydrite
1815	1905	90	Anhydrite
1905	2020	115	Salt
2020	2200	180	Salt and Anhydrite
2200	2465	265	Salt
2465	2780	315	Salt and Anhydrite
2780	2982	202	Salt
2982	2985	3	Blue mud
2985	3295	310	Salt and Anhydrite
3295	3385	90	Salt
3385	3460	75	Salt and anhydrite
3460	3475	15	Anhydrite
3475	3614	139	Lime
3614	3660	46	Lime and shale
3660	3739	79	Lime and sand Gas @ 3690
3739	3910	171	Lime
3910	3913	3	Broken Lime Pay
3913	Total depth		