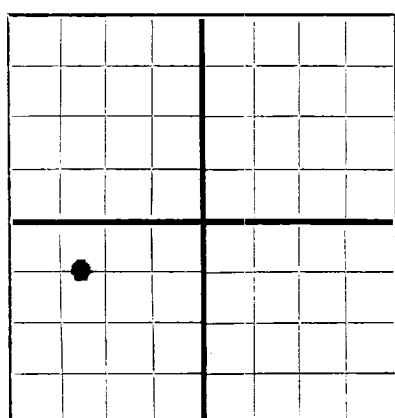


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Wilson Oil Company P.O. Box 627 Santa Fe, New Mexico
Company or Operator Address
State **E-229** Well No. **34** in **NW SW** of Sec. **23**, T. **21**
Lease
R. **34**, N. M. P. M., **Wilson** Field, **Lea** County.
Well is **3300** feet south of the North line and **4290** feet west of the East line of **Sec 23**
If State land the oil and gas lease is No. **E-229** Assignment No. _____
If patented land the owner is _____, Address _____
If Government land the permittee is _____, Address _____
The Lessee is **Wilson Oil Company**, Address **Santa Fe, N.M.**
Drilling commenced **7-9-49** 19____. Drilling was completed **8-19-49** 19____
Name of drilling contractor **Company Tools**, Address _____
Elevation above sea level at top of casing **3708'** feet.
The information given is to be kept confidential until _____ 19____.

OIL SANDS OR ZONES

No. 1, from **3856** to **3859** No. 4, from _____ to _____
No. 2, from **3867** to **3874** No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **775** to **780** feet. _____
No. 2, from **905** to **940** feet. **Hole Full**
No. 3, from _____ to _____ feet. _____
No. 4, from _____ to _____ feet. _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
16	70	8 rd	New	213	Larkin				surface
13	48	"	S.H.	700	"				Water Shut-off
10	38	"	S.H.	1241	"				"
7	20	"	New	3671	Haliburton				Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
22	16	213	150	Haliburton		
8 1/2	7	3671	400	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from **0** feet to **3874** feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **8-19--** 19**49**.
The production of the first 24 hours was **104** barrels of fluid of which **82 bbls**% was oil; _____% emulsion; **22 bbls**% water; and _____% sediment. Gravity, Be. _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

W.R. High, Driller **John Whaley**, Driller
G.C. Parrish, Driller _____, Driller _____

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **31** **Artesia, New Mexico** **8-31-49**
day of **August** 19 **49** Name **Robert L. ...** Place Date

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	146	146	Sand
146	157	11	Gravel
157	190	33	Sand-Shale
190	200	10	Yellow Mud
200	430	230	Red Rock
430	440	10	Sandy-Shale
440	630	190	Red Rock
630	650	20	Sandy-Shale
650	905	255	Red Rock & Sandy Shale Sho. Water 7'5-80
905	940	35	Water Sand Hole Full @ 940
940	1130	190	Sandy Shale
1130	1663	533	Red Rock & Sandy Shale
1663	1702	39	Anhydrite
1702	1710	8	Red Rock
1710	1810	100	Anhydrite
1810	1935	125	Salt
1935	1960	25	Anhydrite
1960	2250	290	Salt
2250	2270	20	Anhydrite
2270	2695	425	Salt
2695	2710	15	Anhydrite
2710	2762	52	Salt
2762	2775	13	Anhydrite
2775	2955	180	Salt
2955	2990	35	Anhydrite
2990	3012	22	Salt & Potash
3012	3022	10	Anhydrite
3022	3055	33	Salt
3055	3075	20	Anhydrite
3075	3180	105	Salt
3180	3210	30	Anhydrite
3210	3335	125	Salt
3335	3406	71	Anhydrite Base Salt 3335'
3406	3543	137	Gray-Brown Lime
3543	3557	14	Sandy Lime
3557	3573	16	Gray Lime
3573	3595	22	Sand & Lime Sho gas 3573, Inc Gas 3582-95
3595	3641	46	Gray- White Lime
3641	3665	24	Gray-Red Sand
3665	3702	37	Gray-White Lime
3702-	3816	114	Red Shale & Sand Gas 3702-16
3716	3803	87	Dry Lime Odor oil 3761-75; Sho oil 3775-8
3803	3856	53	Gray Lime Gray Sand
3856	3859	3	White Lime Show oil gas, water
3859	3867	8	White Lime
3867	3874	7	Lime & Sand 800 to 1000' Oil in hole
3874	Total Depth		