

Submit 3 Copies To Appropriate District
Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO.
30-025-03503

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name:

H.T. Orcutt NCT-F

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other

2. Name of Operator Chevron USA, Inc.

8. Well No.

1

3. Address of Operator 15 Smith Rd. Midland, Tx 79705

9. Pool name or Wildcat

Eumont, Yates, 7 RVRs-Queen

4. Well Location

Unit Letter A : 330 feet from the north line and 330 feet from the east line

Section 25 Township 21-S Range 35-E NMPM County Lea

10. Elevation (Show whether DR, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

1. Notify OCD 24 hrs prior to MI & RU

2. Set 5 1/2 CIBP @ 3425, spot 35sx plug 3425-3100(Queen, Yates, B-salt) WOC Tag,


3. Displace hole w/MLF, 9.5 # Brine w/25 # Gel P/BBL.

4. Spot 40sx plug 1725-1325(8 5/8 shoe, T-salt) WOC Tag.

5. Spot 30sx plug 300-surf(Surface, F.W.) WOC Tag.

6. Install dry hole marker.

THE COMMISSION MUST BE NOTIFIED 24
HOURS PRIOR TO THE BEGINNING OF
PLUGGING OPERATIONS FOR THE C-103
TOC 11/1/00



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE G.R. Bledsoe

TITLE HES Specialist

DATE 10/30/2002

Type or print name G.R. Bledsoe

Telephone No. 915.687.7153

(This space for State use)

APPROVED BY

Conditions of approval, if any:

ORIGINAL SIGNED BY

GARY W. WINK

DATE OCT 31 2002

DATE OCT 31 2002

PLUGGING & ABANDONMENT WORKSHEET

(2 STRING CSNG)

OPERATOR CHEVRON USA INC.

LEASE NAME H.T. ORCUTT (NCT-F)


WELL # 1

SECT 25-A TWN 21-S RNG 35-E

FROM 330 NSL 330 BWL

TD 3950 FORMATION @ TD

PBTD FORMATION @ PBTD QUEEN

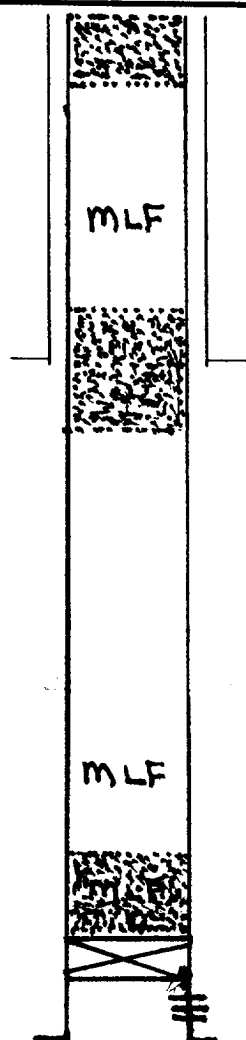

8 5/8
@ 1676
TOC SURF

5 1/2
@ 3950
TOC 85'

TD 3950

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	<u>8 5/8</u>	<u>1676</u>	<u>SURF</u>	<u>Circ.</u>
INTMED 1				
INTMED 2				
PROD	<u>5 1/2</u>	<u>3950</u>	<u>85'</u>	<u>T.S.</u>

	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					

	CUT & PULL	TOP - BOTTOM
INTMED 1		PERFS <u>3475-3930</u>
INTMED 2		OPENHOLE
PROD		

*REQUIRED PLUGS DISTRICT

	PLUG	TYPE PLUG	SACKS CEMENT	DEPTH
RUSTLER (ANHYD)	<u>1</u>	<u>CIBP</u>	<u>35</u>	<u>3425</u>
YATES	<u>2</u>	<u>8 5/8 S</u>	<u>40</u>	<u>1725</u>
QUEEN	<u>3</u>	<u>SURF</u>	<u>30</u>	<u>300</u>
GRAYBURG				
SAN ANDRES				
CAPITAN REEF				
DELAWARE				
BELL CANYON				
CHERRY CANYON				
BRUSHY CANYON				
BONE SPRING				
GLORIETA				
BLINBRY				
TUBB				
DRINKARD				
ABO				
WC				
PENN				
STRAWN				
ATOKA				
MORROW				
MISS				
DEVONIAN				