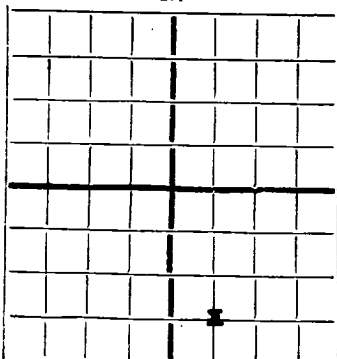


N.

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO STATE LAND OFFICE

SANTA FE, NEW MEXICO

DEPARTMENT OF THE STATE GEOLOGIST

WELL RECORD

Mail to State Geologist, Santa Fe, New Mexico, not more than ten days
after completion of well. Indicate questionable data by fol-
lowing it with (?). Submit in duplicate.

Company Gypsy Oil Company Address Tulsa, Oklahoma
Send correspondence to Gypsy Oil Company Address Hobbs, New Mexico
R. R. Bell (State) Well No. 1 in SE/4 of Sec. 8, T. 21,
R. 36, N. M. P. M., Runice Oil Field Lea County.
If State land the oil and gas lease is No. 15711 Assignment No. Unknown
If patented land the owner is _____, Address _____
The lessee is Gypsy Oil Company, Address Tulsa, Oklahoma
If not state or patented land, give status _____
Drilling commenced May 11, 1934 Drilling was completed June 30, 1934
Name of drilling contractor Company Tools, Address _____
Elevation above sea level at top of casing 3605 DF feet.
The information given is to be kept confidential until Not Confidential 19____.

OIL SANDS OR ZONES

TOPS
No. 1, from Anhydrite to 1260 No. 4, from Upper San Andres to 3705
No. 2, from Top Salt to 1350 No. 5, from Terry Lime to 3905
No. 3, from Base Salt to 2725 No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & PULLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10"	45	8	Lap.	346	None				Shut Off water
7"	24	10	Seam.	2623	Halliburton				Protect Salt
4-5/8"	16	10	Seam.	3772	Halliburton				Oil String
2"	4.7	10	Seam.	3923	None		Bottom	Joint	Flow String

MUDGING AND CEMENTING RECORD

SIZE	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	346	225	Halliburton		
7"	2623	350	Halliburton		
4-5/8"	3772	50	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

SIZE	SHELL USED	EXPLOSIVE USED	QUANTITY	DATE	DEPTH SHOT	DEPTH CLEANED OUT

TOOLS USED

Rotary tools were used from 0 feet to 3929 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing July 8, 1934.
The ~~potential~~ potential of the first 24 hours was 924 barrels of fluid of which 100 % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, Be. 36.0
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

F. A. Hunefelt, Driller C. F. Pippen, Driller
Vistor M. Roe, Driller Talmage Brown, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work
done on it so far as can be determined from available records.

Subscribed and sworn to before me this 13th day of September, 1934 Name C. P. Cummings
Position District Superintendent
Representing Gypsy Oil Company

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	196		Sand and Red Bed
196	230		Sand
230	290		Red Bed
290	352		Caliche
352	410		Red Sandy Shale
410	644		Red Bed
644	670		Lime
670	687		Shale
687	766		Shale and Sandy Lime Shells
766	953		Red Bed
953	973		Lime
973	1065		Red Bed
1065	1140		Red Bed and Thin Streaks of Shale
1140	1180		Red Bed
1180	1240		Red Bed and Sticky Blue Shale
1240	1280		Lime
1280	1285		Shale
1285	1300		Sandy Lime
1300	1310		Shale
1310	1350		Anhydrite
1350	1385		Salt
1385	1413		Lime
1413	1443		Shale
1443	1459		Lime
1459	1570		Salt
1570	1636		Salt and Anhydrite Streaks
1636	1722		Anhydrite and Salt - Mostly Anhydrite
1722	1796		Lime and Salt
1796	1846		Shale and Anhydrite
1846	2734		Salt and Anhydrite
2734	2887		Anhydrite
2887	2893		Brown Lime
2893	3073		Anhydrite
3073	3083		Lime
3083	3099		Anhydrite and Lime Streaks
3099	3109		Lime
3109	3121		Lime and Anhydrite
3121	3142		Lime
3142	3180		Brown Lime
3180	3214		Broken Lime
3214	3242		Brown Lime
3242	3261		Broken Lime
3261	3284		Broken Lime and Green Shale
3284	3300		Broken Lime
3300	3313		Lime
3313	3330		Broken Lime
3330	3343		Broken Lime and Shale
3343	3356		Broken Lime
3356	3371		Brown Lime
3371	3422		Lime
3422	3436		Sandy Lime
3436	3495		Lime
3495	3505		Gritty Lime
3505	3512		Hard Lime
3512	3547		Lime
3547	3592		Sandy Lime
3592	3672		Lime
3672	3692		Lime Broken
3692	3704		Lime and Shale
3704	3718		Lime
3718	3738		Lime and Shale
3738	3756		Lime
3756	3773		Lime and Shale
3773	3784		Lime
3784	3842		Broken Lime
3842	3867		Lime
3867	3890		Lime Broken
3890	3918		Terry Lime
3918	3929		Terry Lime